

CANARM®
HVAC
**Commercial
EC Fans**


TRI-LITE, PENTA-LITE, OCTO-LITE



Direct drive, high volume low speed fans ideal for industrial & commercial settings

FEATURES

- Equipped with three extruded anodized, high performance E420 design aluminum airfoils. Contoured for maximum air movement so environments become cooler faster.
- Three, five or eight wingtip fences constructed of nylon 66 redirect outward airflow into downward airflow to improve and direct airflow downwards.
- 1/4" powder-coated steel and anodized aluminum chassis resists rusting and corrosion even in cold and damp environments.
- Direct drive system allows this fan to operate incredibly quiet. Totally enclosed direct drive, IP65 rated ECM motor. Onboard VFD is factory assembled and programmed for minimum start/stop torque loads.
- Quiet Performance & Minimal Maintenance.
- Conforms to CSA Standard 22.2# 133 and UL507.

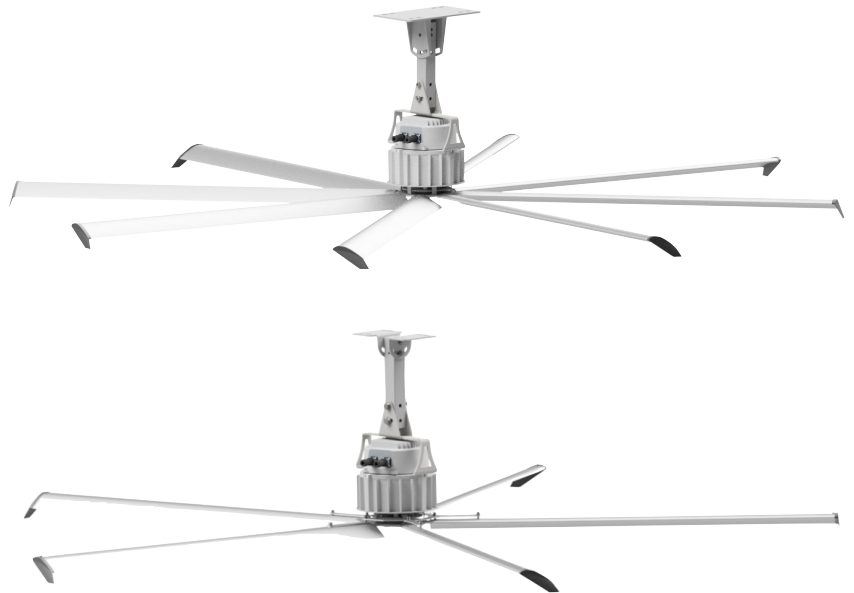

Operating on a 1.35 HP EC motor, minimal power consumption is combined with impressive air volumes to create the highly efficient Commercial EC HVLS Fan.

EC fans blanket a very large area by constantly moving air to create an expansive comfort zone. As a result, the big ceiling fan can create an evaporative cooling effect of three to four degrees throughout the facility.

During the heating season, this technology can destratify uneven temperatures that can be in excess of fifteen degrees from ceiling to floor. This results in significant energy savings since the heating system cycles less frequently.



Required controller sold separately. See HVLS controllers page



TRI-LITE, PENTA-LITE, OCTO-LITE Commercial EC Fans

PERFORMANCE SPECIFICATIONS

TRI-LITE (3 BLADE)

MODEL	DIAMETER	VOLTAGE (VAC)	MAX RPM	MOTOR FLA	PHASE	HP (KW)	AREA COVERED (sqft)	MAX EFFECTIVE DIAMETER (ft)	WEIGHT*** (lbs)
3L07MPEC-V*-P**	7'	120-460V (50/60hz)	204	5.2	1-3	1.35 (1.0)	3,925	70	98
3L08MPEC-V*-P**	8'	120-460V (50/60hz)	156	5.2	1-3	1.35 (1.0)	5,024	80	100

PENTA-LITE (5 BLADE)

MODEL	DIAMETER	VOLTAGE (VAC)	MAX RPM	MOTOR FLA	PHASE	HP (KW)	AREA COVERED (sqft)	MAX EFFECTIVE DIAMETER (ft)	WEIGHT*** (lbs)
5L07EC-V*-P**	7'	120-460 V (50/60hz)	170	5.2	1-3	1.35 (1.0)	3,925	70	103
5L08EC-V*-P**	8'	120-460 V (50/60hz)	130	5.2	1-3	1.35 (1.0)	5,024	80	105
5L10EC-V*-P**	10'	120-460 V (50/60hz)	85	5.2	1-3	1.35 (1.0)	7,850	100	110
5L12EC-V*-P**	12'	120-460 V (50/60hz)	80	5.2	1-3	1.35 (1.0)	11,304	120	114
5L14EC-V*-P**	14'	120-460 V (50/60hz)	60	5.2	1-3	1.35 (1.0)	15,386	140	118
5L16EC-V*-P**	16'	120-460 V (50/60hz)	45	5.2	1-3	1.35 (1.0)	20,096	160	122

OCTO-LITE (8 BLADE)

MODEL	DIAMETER	VOLTAGE (VAC)	MAX RPM	MOTOR FLA	PHASE	HP (KW)	AREA COVERED (sqft)	MAX EFFECTIVE DIAMETER	WEIGHT*** (lbs)
8L07EC-V*-P**	7'	120-460V (50/60hz)	140	5.2	1-3	1.35 (1.0)	3,925	70'	108
8L08EC-V*-P**	8'	120-460V (50/60hz)	100	5.2	1-3	1.35 (1.0)	5,024	80'	110
8L10EC-V*-P**	10'	120-460V (50/60hz)	70	5.2	1-3	1.35 (1.0)	7,850	100'	115
8L12EC-V*-P**	12'	120-460V (50/60hz)	65	5.2	1-3	1.35 (1.0)	11,304	120'	119
8L14EC-V*-P**	14'	120-460V (50/60hz)	55	5.2	1-3	1.35 (1.0)	15,386	140'	123
8L16EC-V*-P**	16'	230-460V (50/60hz)	45	5.2	1-3	1.35 (1.0)	20,096	160'	167


*Replace V with input voltage 115, 230 or 460. ex: 3L10MPEC-230-3, 5L14EC-230-3
8L16EC-230-3

**Replace P with 1 (single phase) or 3 (three phase)

***Based on standard 1 ft extension bar


Please note: Direct drive models are not 208 volt, 3 phase capable.

DIMENSIONS

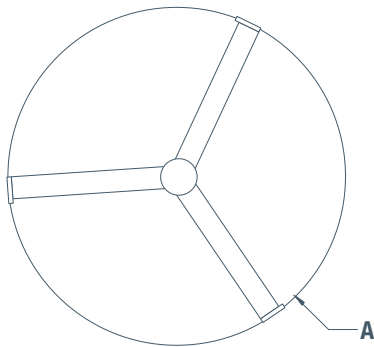


TRI-LITE (3 BLADE)

MODEL	A	B***
3L07MPEC-V*-P**	7'	22.25"
3L08MPEC-V*-P**	8'	22.25"

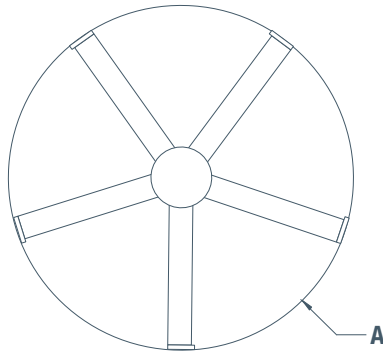

PENTA-LITE (5 BLADE)

MODEL	A	B***
5L07EC-V*-P**	7'	22.25"
5L08EC-V*-P**	8'	22.25"
5L10EC-V*-P**	10'	22.25"
5L12EC-V*-P**	12'	22.25"
5L14EC-V*-P**	14'	22.25"



OCTO-LITE (8 BLADE)

MODEL	A	B***
8L07EC-V*-P**	7'	22.25"
8L08EC-V*-P**	8'	22.25"
8L10EC-V*-P**	10'	22.25"
8L12EC-V*-P**	12'	22.25"
8L14EC-V*-P**	14'	24.50"

*Replace V with input voltage 115, 230 or 460. ex: 3L10MPEC-230-3, 5L14EC-230-3, 8L16EC-230-3

**Replace P with 1 (single phase) or 3 (three phase)

***Based on standard 1 ft extension bar

Controllers for HVLS Fans



**TF-1047
TOUCH 'N' GO
CONTROLLER**

Operate a single fan in forward / reverse with 0-100% speed control. Easily mounts to wall or electric gang box. Fully digital interface with password lockout capability.

Includes 50 ft. of 4-core cable for installation.



**RC-1077
RADAR CONTROLLER**

Digital interface controls all fan functions including programming, fault viewing, and more. Control up to 63 fans individually or as a group. Operate fans for cooling or destratification.



**SY-1034-1
SINGLE YOKE CONTROL**

Includes Fwd/Off/Rev switch and 0-10 speed pot to control fan speed. 100 Ft., 6-core shielded cable. One per fan required.



**DY-1034-2
DOUBLE YOKE CONTROL**

Includes Fwd/Off/Rev switch and 0-10 speed pot to control fan speed. Nema 4X. 2) 100 Ft., 6-core shielded cables. One per two fans required.



**TY-1034-3
TRIPLE YOKE CONTROL**

Includes Fwd/Off/Rev switch and 0-10 speed pot to control fan speed. 3) 100 Ft., 6-core shielded cables. One per three fans required.




**BP-775
VLD CONTROLLER**

Easily mounts to wall for controlling each fan individually via an digital interface.



**BP-789
ULTRALITE CONTROL**

Easily mounts to wall for controlling each fan individually. Allows operation of the fan for cooling and destratification.

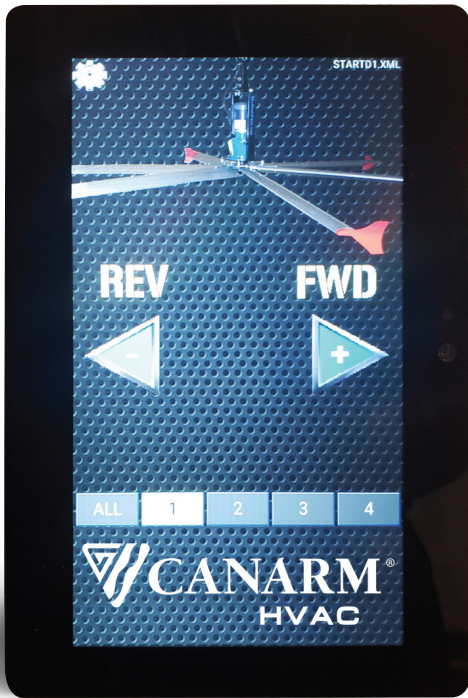

Touch 'N' Go Premier Control

TGPC-1047

7" Digital Touch Screen
Multi-Fan Controller

FOR USE WITH HVLS FANS


FEATURES

- Control multiple fans in groups or individually
- Operate your fans in either forward or reverse
- 0-100% speed control
- Fully digital interface
- Visual indicators of speed and direction
- Password lockout capability

MAX FANS PER CONTROLLER

- TGPC-1047-02 - Up to 2 geared and direct drive fans
- TGPC-1047-04 - Up to 4 geared and direct drive fans
- TGPC-1047-06 - Up to 6 geared and direct drive fans
- TGPC-1047-08 - Up to 8 geared and direct drive fans
- TGPC-1047-10 - Up to 10 geared and direct drive fans

DIMENSIONS

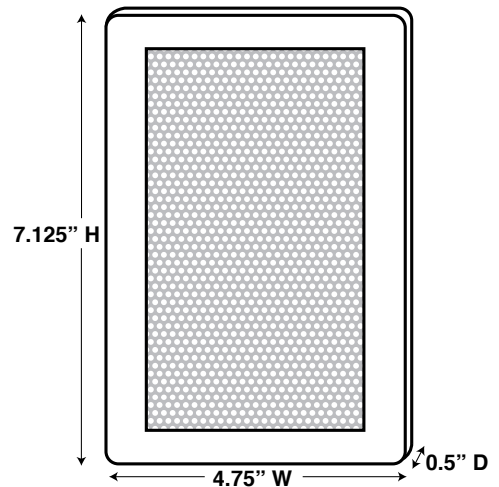

PERFORMANCE SPECIFICATIONS

Power Supply	Language Protocol	Touchscreen Size	Enclosure Material	Luminance	Rating	Display Resolution	Connection	Max. Cable Length	Weight
External 12V (supplied)	0-10v signal/Canada	7"	Steel	380	IP30	272 x 480 pixels	4 Core Shielded Wire	1,640 Feet (500 meters)	0.5 lbs