

Geared drive HVLS Fans

TRI-LITE, PENTA-LITE, HEXA-LITE

Geared drive, high volume low speed fans ideal for industrial & commercial settings

FEATURES

- 1/4" powder-coated steel and anodized aluminum chassis resists rusting and corrosion even in cold and damp environments.
 - Three, five, or six wingtip fences constructed of nylon 66 redirect outward airflow into downward airflow to improve and direct airflow downwards.
 - Quiet Performance & Minimal Maintenance
 - Conforms to CSA Standard 22.2# 133 and UL507
-
- **TRI-LITE (3 BLADE)** Equipped with three high performance STOL design airfoils constructed of precision 6005-T5 extruded anodized aluminium alloy. Contoured for maximum air movement.
 - Totally enclosed, fan cooled (TEFC) IP55 motor with precision finished gearbox for low noise and long service life. Sealed with lifetime synthetic oil. Robust 3 inch output shaft for strength with nylon bushing on input.
-
- **PENTA-LITE (5 BLADE)** Equipped with five high performance STOL design airfoils constructed of E420 non-anodized aluminium. Contoured for maximum air movement.
 - Factory programmed Variable Frequency Drive (VFD) in remote mounted enclosure. Includes disconnect switch and fuse protection.
 - Open Drip Proof (ODP) motor with precision finished gearbox for low noise and long service life. Sealed with lifetime synthetic oil. Robust 3-inch output shaft for strength with nylon bushing on input.
-
- **HEXA-LITE (6 BLADE)** Equipped with six extruded anodized, high performance E420 design aluminum airfoils. Contoured for maximum air movement so environments become cooler faster.
 - Totally enclosed, fan cooled (TEFC) IP55 motor with precision finished gearbox for low noise and long service life. Sealed with lifetime synthetic oil.

Operating on a 1.0 HP gear motor, minimal power consumption is combined with impressive air volumes to create the highly efficient and geared drive HVLS fans.

HVLS fans blanket a very large area by constantly moving air to create an expansive comfort zone. As a result, the big ceiling fan can create an evaporative cooling effect of three to four degrees throughout the facility.

During the heating season, the HVLS fan technology can destratify uneven temperatures that can be in excess of fifteen degrees from ceiling to floor. This results in significant energy savings since the heating system cycles less frequently.



Required controller sold separately. See HVLS controllers page

TRI-LITE, PENTA-LITE, HEXA-LITE

HVLS Fans

PERFORMANCE SPECIFICATIONS

TRI-LITE (3 BLADE)

MODEL	DIAMETER	NOMINAL MOTOR	VOLTS	MAX RPM	FLA	AREA OF INFLUENCE	NOISE LEVEL	WEIGHT***
3L12-V*.P**	12 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	105	1.69-3.38	120 Ft.	45 dBA	223 lbs.
3L14-V*.P**	14 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	86	1.69-3.38	140 Ft.	45 dBA	229 lbs.
3L16-V*.P**	16 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	73	1.69-3.38	160 Ft.	45 dBA	235 lbs.
3L18-V*.P**	18 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	49	1.69-3.38	180 Ft.	45 dBA	241 lbs.
3L20-V*.P**	20 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	49	1.69-3.38	200 Ft.	45 dBA	247 lbs.
3L24-V*.P**	24 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	42	1.69-3.38	240 Ft.	45 dBA	260 lbs.

PENTA-LITE (5 BLADE)

MODEL	DIAMETER	NOMINAL MOTOR	VOLTS	MAX RPM	FLA	AREA OF INFLUENCE	NOISE LEVEL	WEIGHT***
5L12-V*.P**	12 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	85	1.96-3.38	120 Ft.	45 dBA	246 lbs.
5L14-V*.P**	14 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	75	1.96-3.38	140 Ft.	45 dBA	256 lbs.
5L16-V*.P**	16 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	64	1.96-3.38	160 Ft.	45 dBA	266 lbs.
5L18-V*.P**	18 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	55	1.96-3.38	180 Ft.	45 dBA	277 lbs.
5L20-V*.P**	20 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	53	1.96-3.38	200 Ft.	45 dBA	287 lbs.
5L24-V*.P**	24 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	42	1.96-3.38	240 Ft.	45 dBA	307 lbs.

HEXA-LITE (6 BLADE)




MODEL	DIAMETER (ft)	VOLTAGE (VAC)	MAX RPM	MOTOR FLA	PHASE	HP (KW)	AREA COVERED (sqft)	MAX EFFECTIVE DIAMETER (ft)	WEIGHT*** (lbs)
6L12-V*.P**	12	99-660 (48/62hz)	85	2.3 - 5.2	1-3	1.0 (0.75)	11,304	120	286
6L14-V*.P**	14	99-660 (48/62hz)	75	2.3 - 5.2	1-3	1.0 (0.75)	15,386	140	298
6L16-V*.P**	16	99-660 (48/62hz)	64	2.3 - 5.2	1-3	1.0 (0.75)	20,096	160	310
6L18-V*.P**	18	99-660 (48/62hz)	55	2.3 - 5.2	1-3	1.0 (0.75)	25,434	180	323
6L20-V*.P**	20	99-660 (48/62hz)	50	2.3 - 5.2	1-3	1.0 (0.75)	31,400	200	335
6L24-V*.P**	24	99-660 (48/62hz)	42	2.3 - 5.2	1-3	1.0 (0.75)	45,216	240	380

*Replace V with input voltage 115, 230 or 460. ex: 3L24-230-3, 5L24-230-3

**Replace P with 1 (single phase) or 3 (three phase)


***Based on standard 1 ft extension bar

DIMENSIONS

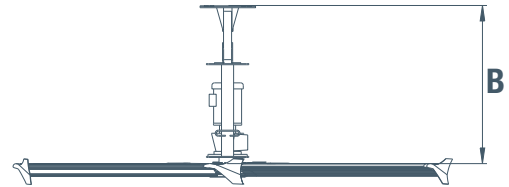

MODEL	A	B***
3L12	12'	44"
3L14	14'	44"
3L16	16'	46"
3L18	18'	49"
3L20	20'	51"
3L24	24'	55"

MODEL	A	B***
6L12	12'	39"
6L14	14'	39"
6L16	16'	39"
6L18	18'	39"
6L20	20'	39"
6L24	24'	39"

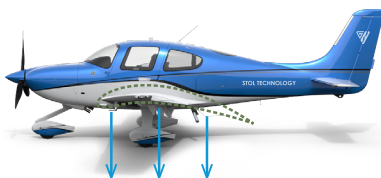

Airfoils engineered with S.T.O.L. (Short Take Off & Landing) Technology obtain the greatest amount of lift at slower speeds. The more lift the airfoil can generate, the greater amount of air which can be displaced towards the floor.

Due to an increase of lift created by the airfoil, these fans can operate at lower speeds with less power consumption and produce a higher distribution of airflow than other styles of airfoils.

Controllers for HVLS Fans



**TF-1047
TOUCH 'N' GO
CONTROLLER**

Operate a single fan in forward / reverse with 0-100% speed control. Easily mounts to wall or electric gang box. Fully digital interface with password lockout capability.

Includes 50 ft. of 4-core cable for installation.



**RC-1077
RADAR CONTROLLER**

Digital interface controls all fan functions including programming, fault viewing, and more. Control up to 63 fans individually or as a group. Operate fans for cooling or destratification.



**SY-1034-1
SINGLE YOKE CONTROL**

Includes Fwd/Off/Rev switch and 0-10 speed pot to control fan speed. 100 Ft., 6-core shielded cable. One per fan required.



**DY-1034-2
DOUBLE YOKE CONTROL**

Includes Fwd/Off/Rev switch and 0-10 speed pot to control fan speed. Nema 4X. 2) 100 Ft., 6-core shielded cables. One per two fans required.



**TY-1034-3
TRIPLE YOKE CONTROL**

Includes Fwd/Off/Rev switch and 0-10 speed pot to control fan speed. 3) 100 Ft., 6-core shielded cables. One per three fans required.




**BP-775
VLD CONTROLLER**

Easily mounts to wall for controlling each fan individually via an digital interface.



**BP-789
ULTRALITE CONTROL**

Easily mounts to wall for controlling each fan individually. Allows operation of the fan for cooling and destratification.

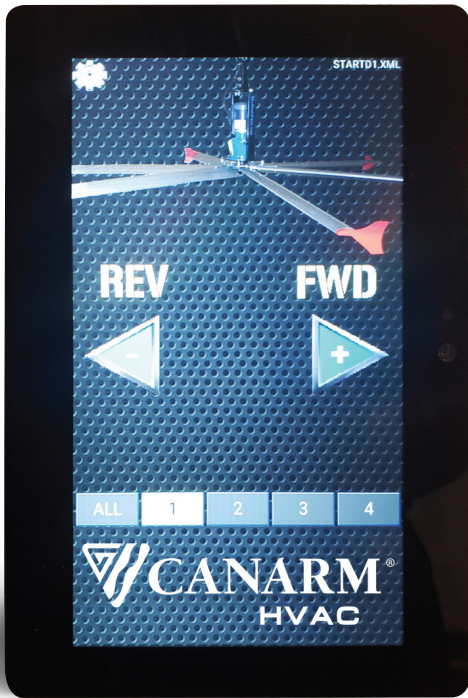

Touch 'N' Go Premier Control

TGPC-1047

7" Digital Touch Screen
Multi-Fan Controller

FOR USE WITH HVLS FANS


FEATURES

- Control multiple fans in groups or individually
- Operate your fans in either forward or reverse
- 0-100% speed control
- Fully digital interface
- Visual indicators of speed and direction
- Password lockout capability

MAX FANS PER CONTROLLER

- TGPC-1047-02 - Up to 2 geared and direct drive fans
- TGPC-1047-04 - Up to 4 geared and direct drive fans
- TGPC-1047-06 - Up to 6 geared and direct drive fans
- TGPC-1047-08 - Up to 8 geared and direct drive fans
- TGPC-1047-10 - Up to 10 geared and direct drive fans

DIMENSIONS

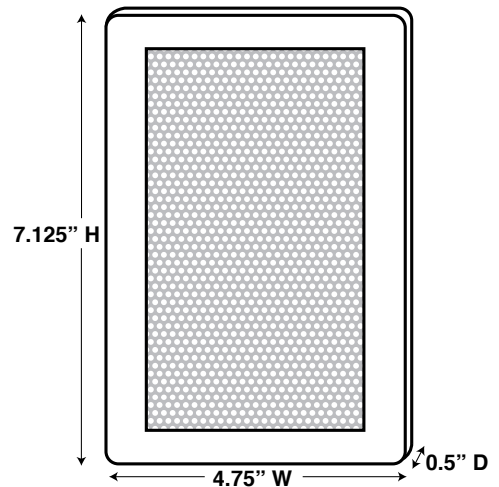

PERFORMANCE SPECIFICATIONS

Power Supply	Language Protocol	Touchscreen Size	Enclosure Material	Luminance	Rating	Display Resolution	Connection	Max. Cable Length	Weight
External 12V (supplied)	0-10v signal/Canada	7"	Steel	380	IP30	272 x 480 pixels	4 Core Shielded Wire	1,640 Feet (500 meters)	0.5 lbs