


Standard Steel Round Control Dampers

SCD-RD

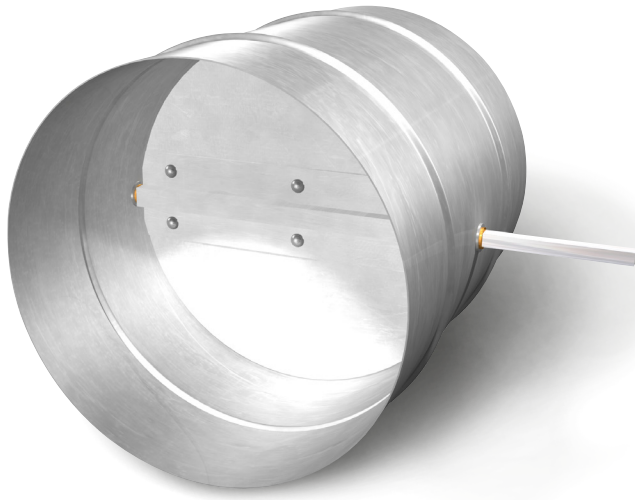

Designed and tested to be reliable and cost effective where tight sealing is not of primary importance.

For tight sealing models see SCD-RD-LL

The SCD-RD-LL series dampers have pressure sensitive blade edge seals to provide the ultimate in sealing characteristics without unduly increasing torque requirements.

FEATURES

- FRAME: galvanized steel, rolled reinforcement.
DIAMETER GAUGE
5" - 9" 22 ga.
10" - 24" 20 ga.
- BLADE: galvanized steel with welded channel reinforcement.
- BEARINGS: bronze oilite
- AXLES: 3/8" square plated steel
- FINISH: mill galvanized
- EXTENDED SHAFT: Removable. 1/2" diameter, plated steel
- MAXIMUM TEMPERATURE: 200°F
- DAMPER SIZES: 5" to 24" diameter

Dampers are furnished approximately 1/8" smaller than given duct dimensions.

Non-standard shutters are non-returnable and cannot be cancelled.



FACTORY INSTALLED ELECTRIC OPERATORS AVAILABLE.

For dampers ordered with motor standard off bracket. Consult factory for details.



ORDERING METHOD

SCD-RD-10

DAMPER STYLE DIAMETER

DAMPER STYLES: Standard model = SCD-RD; Low Leakage model = SCD-RD-LL

