

Direct drive HVLS Fans

TRI-LITE, HEXA-LITE

Direct drive, high volume low speed fans - ideal for industrial & commercial settings

FEATURES

- Equipped with three or six extruded anodized, high performance E420 design aluminum airfoils. Contoured for maximum air movement, so environments become cooler faster.
- Three or six wingtip fences constructed of nylon 66 redirect outward airflow into downward airflow to improve and direct airflow downwards.
- 1/4" powder-coated steel and anodized aluminum chassis resists rusting and corrosion even in cold and damp environments.
- Direct drive system allows this fan to operate incredibly quiet. Totally enclosed direct drive, IP65 rated ECM motor. Onboard VFD is factory assembled and programmed for minimum start/stop torque loads.
- Quiet Performance & Minimal Maintenance
- Conforms to CSA Standard 22.2# 133 and UL507



- **HEXA-LITE (6 BLADE)** Totally enclosed, fan cooled (TEFC) IP55 motor with precision finished gearbox for low noise and long service life. Sealed with lifetime synthetic oil.

Operating on a 1.35 HP EC motor, minimal power consumption is combined with impressive air volumes to create the highly efficient Direct Drive HVLS Fan.

HVLS fans blanket a very large area by constantly moving air to create an expansive comfort zone. As a result, the big ceiling fan can create an evaporative cooling effect of three to four degrees throughout the facility.

During the heating season, the HVLS fan technology can destratify uneven temperatures that can be in excess of fifteen degrees from ceiling to floor. This results in significant energy savings since the heating system cycles less frequently.



Required controller sold separately. See HVLS controllers page

TRI-LITE, HEXA-LITE

Direct Drive HVLS Fans

PERFORMANCE SPECIFICATIONS

TRI-LITE (3 BLADE)

MODEL	DIAMETER	NOMINAL MOTOR	VOLTS	MAX RPM	FLA	AREA OF INFLUENCE	NOISE LEVEL	WEIGHT***
3L16EC-V*-P**	16 Ft	1 kW (1.35 HP) - 50/60hz	198-480	73	5.2	160 Ft.	35 dBA	255 lbs.
3L18EC-V*-P**	18 Ft	1 kW (1.35 HP) - 50/60hz	198-480	55	5.2	180 Ft.	35 dBA	260 lbs.
3L20EC-V*-P**	20 Ft	1 kW (1.35 HP) - 50/60hz	198-480	50	5.2	200 Ft.	35 dBA	265 lbs.
3L24EC-V*-P**	24 Ft	1 kW (1.35 HP) - 50/60hz	198-480	43	5.2	240 Ft.	35 dBA	270 lbs.

* Replace V with Input Voltage 115, 230 or 460. IE: 3L08EC-230-3.

** Replace P with 1 (Single Phase) or 3 (Three Phase)

***Based on standard 1' extension bar

HEXA-LITE (6 BLADE)

MODEL	DIAMETER (ft)	VOLTAGE (VAC)	MAX RPM	MOTOR FLA	PHASE	HP (KW)	AREA COVERED (sqft)	MAX EFFECTIVE DIAMETER (ft)	WEIGHT*** (lbs)
6L14EC-V*-P**	14	180-480 (50/60hz)	75	5.2	1-3	1.35 (1.0)	15,386	140	315
6L16EC-V*-P**	16	180-480 (50/60hz)	64	5.2	1-3	1.35 (1.0)	20,096	160	325
6L18EC-V*-P**	18	180-480 (50/60hz)	55	5.2	1-3	1.35 (1.0)	25,434	180	335
6L20EC-V*-P**	20	180-480 (50/60hz)	50	5.2	1-3	1.35 (1.0)	31,400	200	345
6L24EC-V*-P**	24	180-480 (50/60hz)	33	5.2	1-3	1.35 (1.0)	45,216	240	355


*Replace V with input voltage 115, 230 or 460. ex: 3L08EC-230-3

**Replace P with 1 (single phase) or 3 (three phase)

***Based on standard 1 ft extension bar

Please note: Direct drive models are not 208 volt, 3 phase capable.

DIMENSIONS



TRI-LITE (3 BLADE)


MODEL	A	B***
3L16EC-V*-3**	16'	40"
3L18EC-V*-3**	18'	43"
3L20EC-V*-3**	20'	45"
3L24EC-V*-3**	24'	49"

*Replace V with input voltage 115, 230 or 460.

ex: 3L08EC-230-3, 6L24EC-230-3

**Replace P with 1 (single phase) Please note: Direct drive models are not 208 Volt 3 phase capable.

***Based on standard 1 ft extension bar

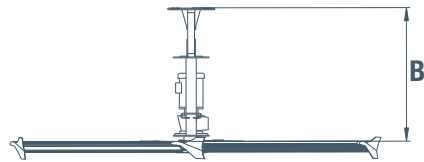

HEXA-LITE (6 BLADE)

MODEL	A	B***
6L14EC	14'	33"
6L16EC	16'	33"
6L18EC	18'	33"
6L20EC	20'	33"
6L24EC	24'	33"



Airfoils engineered with S.T.O.L. (Short Take Off & Landing) Technology obtain the greatest amount of lift at slower speeds. The more lift the airfoil can generate, the greater amount of air which can be displaced towards the floor.

Due to an increase of lift created by the airfoil, these fans can operate at lower speeds with less power consumption and produce a higher distribution of airflow than other styles of airfoils.

Controllers for HVLS Fans



**TF-1047
TOUCH 'N' GO
CONTROLLER**

Operate a single fan in forward / reverse with 0-100% speed control. Easily mounts to wall or electric gang box. Fully digital interface with password lockout capability.

Includes 50 ft. of 4-core cable for installation.



**RC-1077
RADAR CONTROLLER**

Digital interface controls all fan functions including programming, fault viewing, and more. Control up to 63 fans individually or as a group. Operate fans for cooling or destratification.



**SY-1034-1
SINGLE YOKE CONTROL**

Includes Fwd/Off/Rev switch and 0-10 speed pot to control fan speed. 100 Ft., 6-core shielded cable. One per fan required.



**DY-1034-2
DOUBLE YOKE CONTROL**

Includes Fwd/Off/Rev switch and 0-10 speed pot to control fan speed. Nema 4X. 2) 100 Ft., 6-core shielded cables. One per two fans required.



**TY-1034-3
TRIPLE YOKE CONTROL**

Includes Fwd/Off/Rev switch and 0-10 speed pot to control fan speed. 3) 100 Ft., 6-core shielded cables. One per three fans required.




**BP-775
VLD CONTROLLER**

Easily mounts to wall for controlling each fan individually via an digital interface.



**BP-789
ULTRALITE CONTROL**

Easily mounts to wall for controlling each fan individually. Allows operation of the fan for cooling and destratification.

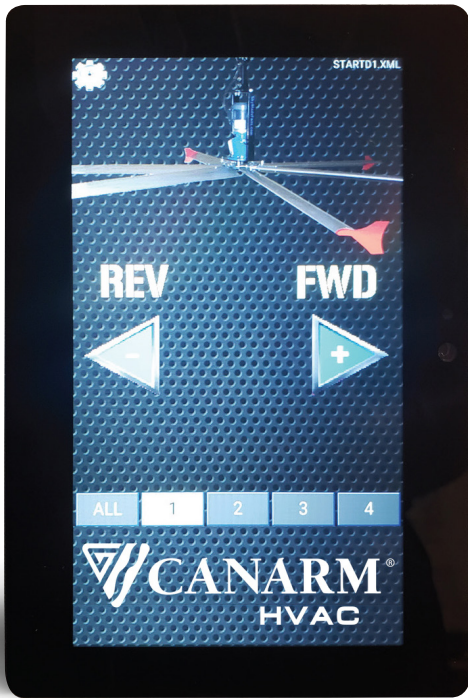

Touch 'N' Go Premier Control

TGPC-1047

7" Digital Touch Screen
Multi-Fan Controller

FOR USE WITH HVLS FANS


FEATURES

- Control multiple fans in groups or individually
- Operate your fans in either forward or reverse
- 0-100% speed control
- Fully digital interface
- Visual indicators of speed and direction
- Password lockout capability

MAX FANS PER CONTROLLER

- TGPC-1047-02 - Up to 2 geared and direct drive fans
- TGPC-1047-04 - Up to 4 geared and direct drive fans
- TGPC-1047-06 - Up to 6 geared and direct drive fans
- TGPC-1047-08 - Up to 8 geared and direct drive fans
- TGPC-1047-10 - Up to 10 geared and direct drive fans

DIMENSIONS

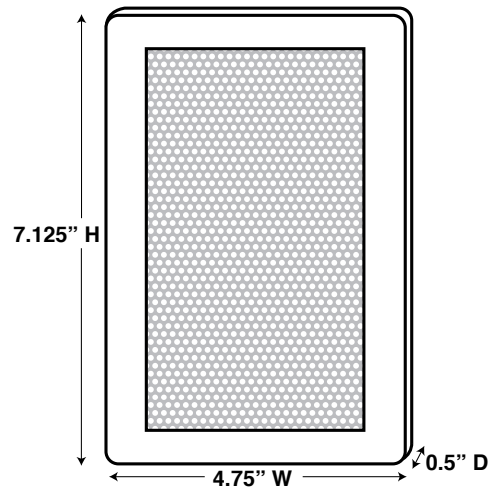

PERFORMANCE SPECIFICATIONS

Power Supply	Language Protocol	Touchscreen Size	Enclosure Material	Luminance	Rating	Display Resolution	Connection	Max. Cable Length	Weight
External 12V (supplied)	0-10v signal/Canada	7"	Steel	380	IP30	272 x 480 pixels	4 Core Shielded Wire	1,640 Feet (500 meters)	0.5 lbs