

Heavy Duty Belt Drive Wall Exhaust Fans


HVA SERIES

Designed for heavy duty, commercial and industrial exhaust applications.

Heavy duty airfoil-cast aluminum or anti-static glass reinforced nylon blades are standard on HVA series fans providing maximum performance at low sound levels.

These fans are typically used for high volume, high static pressure applications. The HVA is designed and constructed for efficient and economical operations while maximizing performance for heavy duty applications.

This fan is used for exhaust applications. Please consult factory for supply applications.




Reversing blades available on 30", 36", 42" and 48" models. Please consult factory for details. Reversing fan with cabinet will be a steel control damper.

FEATURES

- Heavy gauge steel fan panel with deep spun and flared venturi for maximum efficiency.
- Heavy gauge welded steel motor and bearing supports.
- Balanced cast aluminum airfoil blades (24" - 48").
- Electro anti-static glass reinforced nylon blades available in 54" - 60".
- Heavy duty cast iron pillow block bearings.
- TEFC motors are standard.

DIMENSIONS

MODEL	BLADE DIAMETER	A X A SQUARE	B	C (BELT DRIVE MOTOR FRAME)	
				56 - 184	213 - 286
HVA24	24"	29.625"	4.0"	18"	--
HVA30	30"	35.625"	4.5"	18"	--
HVA36	36"	41.625"	5.0"	18"	28"
HVA42	42"	47.625"	5.0"	18"	28"
HVA48	48"	53.625"	5.0"	18"	28"
HVA54	54"	59.657"	5.5"	18"	28"
HVA60	60"	67.657"	6.0"	18"	28"



OPTIONS



For fan complete with cabinet/guard and shutter, substitute "T" with CBS



For fan complete with front sleeve and shutter, substitute "T" with SLS



For fan with rear sleeve and back guard, substitute "T" with SLB

HVA SERIES Heavy Duty Belt Drive Wall Exhaust Fans

PERFORMANCE SPECIFICATIONS

	MODEL #	THREE PHASE	WEIGHT (LBS.)	RPM	HP	dBA @ 5 ft	CFM @ STATIC PRESSURE																																									
							0"							1/8"							1/4"							3/8"							1/2"							5/8"						
							CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)	CFM	BHP	FEI	FEPact (kW)										
24"	HVA24T10075	113	1324	3/4	65	6100	0.61	-	-	5600	0.67	-	-	4900	0.7	-	-	4200	0.7	-	-	3500	0.74	-	-	-	-	-	-	-	-	-	-	-														
	HVA24T10100	132	1475	1	67	6800	0.85	0.89	0.85	6300	0.89	1.01	0.88	5800	0.96	1.07	0.95	5100	0.95	1.13	0.94	4500	0.99	1.12	0.97	-	-	-	-	-	-	-	-															
	HVA24T10150	114	1695	1 1/2	70	7800	1.28	0.69	1.23	7400	1.35	0.80	1.29	6900	1.38	0.89	1.31	6400	1.44	0.95	1.37	5900	1.47	0.99	1.39	-	-	-	-	-	-	-	-															
	HVA24T10200	153	1865	2	72	8600	1.72	0.57	1.61	8200	1.77	0.68	1.65	7800	1.83	0.77	1.70	7400	1.92	0.82	1.78	6900	1.96	0.87	1.81	5900	1.97	0.95	1.82	5900	1.97	0.95	1.82															
	HVA24T10300	165	2140	3	76	9900	2.63	0.44	2.38	9500	2.64	0.54	2.39	9200	2.74	0.61	2.48	8800	2.78	0.68	2.51	8400	2.85	0.73	2.57	7600	2.95	0.82	2.65	7600	2.95	0.82	2.65															
	HVA30T10100	145	1000	1	66	10000	0.91	1.16	0.90	9000	0.97	1.28	0.96	7800	1	1.33	0.98	6400	0.98	1.34	0.96	-	-	-	-	-	-	-	-	-	-	-	-															
	HVA30T10150	127	1150	1 1/2	69	11500	1.39	0.90	1.32	10600	1.43	1.04	1.36	9600	1.48	1.12	1.40	8500	1.49	1.18	1.41	7300	1.49	1.18	1.41	-	-	-	-	-	-	-	-															
	HVA30T10200	169	1260	2	71	12600	1.83	0.76	1.70	11800	1.88	0.89	1.74	10900	1.93	0.99	1.79	9900	1.96	1.05	1.81	9000	1.97	1.10	1.82	-	-	-	-	-	-	-	-															
	HVA30T10300	180	1260	3	74	12600	1.83	0.76	1.70	11800	1.88	0.89	1.74	10900	1.93	0.99	1.79	9900	1.96	1.05	1.81	9000	1.97	1.10	1.82	-	-	-	-	-	-	-	-															
	HVA30T10500	191	1725	5	78	17200	4.65	0.42	4.08	16600	4.71	0.51	4.13	16000	4.78	0.09	4.19	15400	4.88	0.67	4.27	14700	4.93	0.73	4.32	-	-	-	-	-	-	-	-															
	HVA36T10150	157	845	1 1/2	69	14300	1.43	1.06	1.36	12600	1.45	1.20	1.37	10900	1.47	1.27	1.39	8500	1.44	1.22	1.37	6100	1.48	1.01	1.40	-	-	-	-	-	-	-	-															
	HVA36T10200	199	930	2	71	15800	1.93	0.88	1.79	14300	1.96	1.02	1.81	12800	1.99	1.11	1.84	11000	1.98	1.15	1.83	8600	1.96	1.06	1.81	-	-	-	-	-	-	-	-															
36"	HVA36T10300	212	1065	3	74	18100	2.89	0.69	2.60	16800	2.94	0.81	2.65	15500	2.98	0.91	2.68	14100	2.99	0.98	2.69	12400	2.95	1.01	2.65	8300	2.95	0.88	2.65	8300	2.95	0.88	2.65															
	HVA36T10500	223	1265	5	78	21400	4.78	0.50	4.19	20400	4.91	0.60	4.30	19300	4.96	0.69	4.34	18200	4.99	0.76	4.37	17000	4.98	0.83	4.36	14100	4.9	0.89	4.29	14100	4.9	0.89	4.29															
	HVA36T10750	312	1450	7 1/2	80	24600	7.27	0.38	6.26	23700	7.38	0.46	6.36	22700	7.41	0.54	6.38	21700	7.43	0.61	6.40	20700	7.43	0.68	6.40	18600	7.46	0.77	6.42	18600	7.46	0.77	6.42															
	HVA42T10150	190	750	1 1/2	69	18200	1.35	1.39	1.29	15900	1.44	1.50	1.37	13600	1.48	1.54	1.40	11000	1.45	1.52	1.37	7600	1.48	1.23	1.40	-	-	-	-	-	-	-	-															
	HVA42T10200	231	830	2	71	20200	1.85	1.15	1.72	18100	1.94	1.28	1.80	16600	1.99	1.36	1.84	13800	1.99	1.40	1.84	11000	1.97	1.32	1.82	-	-	-	-	-	-	-	-															
	HVA42T10300	243	945	3	73	23000	2.73	0.90	2.47	21200	2.86	1.03	2.58	19400	2.94	1.13	2.65	17500	2.96	1.21	2.66	15600	2.96	1.25	2.66	10400	2.95	1.09	2.65	10400	2.95	1.09	2.65															
	HVA42T10500	255	1125	5	75	27300	4.56	0.65	4.01	25800	4.73	0.77	4.15	24300	4.86	0.87	4.26	22700	4.9	0.96	4.29	21100	4.93	1.02	4.32	17900	4.93	1.11	4.32	17900	4.93	1.11	4.32															
	HVA42T10750	351	1285	7 1/2	79	31200	6.81	0.50	5.88	29800	6.96	0.61	6.01	28500	7.13	0.70	6.15	27200	7.26	0.78	6.26	25800	7.3	0.85	6.29	23100	7.41	0.95	6.38	23100	7.41	0.95	6.38															
	HVA48T10200	273	655	2	68	21400	1.78	1.26	1.66	18900	1.87	1.38	1.74	16600	1.95	1.44	1.80	14000	1.97	1.43	1.82	10400	1.95	1.27	1.80	-	-	-	-	-	-	-	-															
	HVA48T10300	284	755	3	71	24600	2.71	0.97	2.45	22500	2.84	1.10	2.56	20400	2.92	1.19	2.63	18400	2.99	1.25	2.69	16000	2.99	1.27	2.69	9900	2.99	1.02	2.69	9900	2.99	1.02	2.69															
	HVA48T10500	295	890	5	75	29000	4.43	0.71	3.90	27300	4.63	0.83	4.07	25500	4.74	0.93	4.16	23700	4.81	1.01	4.22	22000	4.9	1.07	4.29	17900	4.92	1.11	4.31	17900	4.92	1.11	4.31															
	48"	HVA48T10750	393	1025	7 1/2	78	33400	6.78	0.54	5.86	31900	6.99	0.65	6.03	30300	7.12	0.74	6.14	28800	7.26	0.82	6.26	27300	7.37	0.89	6.35	24200	7.49	0.99	6.45	24200	7.49	0.99	6.45														
HVA54T11000		404	1160	10	80	36800	9.06	0.45	7.75	35400	9.28	0.54	7.93	34000	9.46	0.63	8.08	32600	9.61	0.70	8.20	31300	9.8	0.77	8.36	28500	9.95	0.88	8.48	28500	9.95	0.88	8.48															
HVA54T10300		339	560	3	74	30500	2.76	1.16	2.49	27300	2.83	1.32	2.55	22900	2.82	1.38	2.54	16800	2.8	1.22	2.53	12800	2.98	1.03	2.68	-	-	-	-	-	-	-	-															
HVA54T10500		346	675	5	76	36700	4.82	0.81	4.22	34300	4.95	0.96	4.33	31100	4.98	1.07	4.36	27300	4.95	1.13	4.33	22200	4.85	1.09	4.25	-	-	-	-	-	-	-	-															
HVA54T10750		480	775	7 1/2	78	42100	7.27	0.63	6.26	40100	7.45	0.76	6.41	37600	7.5	0.87	6.46	34400	7.48	0.95	6.44	31100	7.45	1.00	6.41	22100	7.47	0.91	6.43	22100	7.47	0.91	6.43															
HVA54T11000		483	850	10	81	46200	9.61	0.52	8.20	44300	9.75	0.64	8.35	42200	9.89	0.74	8.48	39600	9.92	0.82	8.51	36600	9.88	0.88	8.47	29600	9.74	0.92	8.35	29600	9.74	0.92	8.35															
HVA60T10500*		377	605	5	74	43200	4.7	0.97	4.12	39600	4.81	1.14	4.22	35800	4.87	1.25	4.27	30700	4.98	1.25	4.36	23300	4.88	1.13	4.27	-	-	-	-	-	-	-	-															
HVA60T10750*		508	690	7 1/2	76	49500	7.07	0.75	6.10	46400	7.2	0.90	6.21	43200	7.32	1.01	6.31	39600	7.4	1.09	6.37	35000	7.46	1.11	6.42	23900	7.4	0.88	6.37	23900	7.4	0.88	6.37															
HVA60T11000*		520	755	10	78	54700	9.55	0.62	8.15	51900	9.68	0.75	8.26	48900	9.76	0.86	8.33	46000	9.88	0.95	8.43	42500	9.97	1.01	8.50	31400	9.95	0.86	8.48	31400	9.95	0.86	8.48															
54"		HVA60T10300*	339	560	3	74	30500	2.76	1.16	2.49	27300	2.83	1.32	2.55	22900	2.82	1.38	2.54	16800	2.8	1.22	2.53	12800	2.98	1.03	2.68	-	-	-	-	-	-	-	-														
		HVA60T10500*	346	675	5	76	36700	4.82	0.81	4.22	34300	4.95	0.96	4.33	31100	4.98	1.07	4.36	27300	4.95	1.13	4.33	22200	4.85	1.09	4.25	-	-	-	-	-	-	-	-														
		HVA60T10750*	480	775	7 1/2	78	42100	7.27	0.63	6.26	40100	7.45	0.76	6.41	37600	7.5	0.87	6.46	34400	7.48	0.95	6.44	31100	7.45	1.00	6.41	22100	7.47	0.91	6.43	22100	7.47	0.91	6.43														
	HVA60T11000*	483	850	10	81	46200	9.61	0.52	8.20	44300	9.75	0.64	8.35	42200	9.89	0.74	8.48	39600	9.92	0.82	8.51	36600	9.88	0.88	8.47	29600	9.74	0.92	8.35	29600	9.74	0.92	8.35															
	HVA60T13000*	559	975	15	86	53200	14.63	0.39	12.43	51400	14.73	0.49	12.49	49600	14.83	0.58	12.58	47600	14.92	0.66	12.66	45300	14.97	0.72	12.70	40100	14.9	0.82	12.64	40100	14.9	0.82	12.64															
	HVA60T13500*	577	605	5	74	43200	4.7	0.97	4.12	39600	4.81	1.12	4.26	35800	4.87	1.24	4.32	30700	4.98	1.24	4.42	23300	4.88	1.12	4.32	-	-	-	-	-	-	-																

Options & Accessories for Standard Wall Exhaust Fans

CABINET, BACK GUARD & SHUTTER (CBS)



FRONT GUARDS

Front guards available, consult factory.

Wire mesh not available on all sizes.



FRONT SLEEVE & SHUTTER (SLS)




STEEL CONTROL & MOTORIZED CONTROL DAMPERS

Motorized steel control dampers can be mounted in fan cabinet or sleeve in either exhaust or intake applications. Consult factory.



REAR SLEEVE & BACK GUARD (SLB)

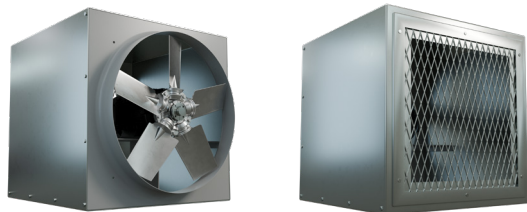

SPECIAL COATING

For most applications, Canarm's standard enamel paint will provide the necessary surface protection for painted parts. For special requirements, coatings such as hot dipped galvanizing and epoxy, please consult factory.

DISCONNECT SWITCHES

Wire disconnect switches are available.

MOTOR OPTIONS

TWO SPEED MOTOR

Two speed motors are available for some of Canarm's exhaust fans. 1800/1200 or 1800/900 RPM variable torque, single and three phase. Consult factory for available voltages and configurations.



Explosion Proof MOTORS (direct drive only)

Some of Canarm exhaust fans can be equipped with Explosion Proof Motors for hazardous locations. Class I, Groups C & D - Class II, Groups F & G. Consult factory for models.



Class I, Group C	Atmospheres containing ethyl ether, ethylene, gases or vapors of equivalent hazard.
Class I, Group D	Atmospheres such as acetone, ammonia, benzene, butane, cyclopropane, ethanol, gasoline, hexane, methane, natural gas, naphtha, propane, or gasses or vapors of equivalent hazard.
Class II Group F	Atmospheres containing carbonaceous dust, including carbon black, charcoal, coal, or coke dusts that have more than 8% total entrapped volatiles, or dusts that have been sensitized by other materials so that they present an explosion hazard.
Class II Group G	Atmospheres containing combustible dusts not included in group E or F, including flour, grain, wood, plastic and chemicals.

Options & Accessories for Standard Wall Exhaust Fans

VENTURI





BLADE DIAMETER	A X A SQUARE	B	C				
			BELT DRIVE MOTOR FRAME		DIRECT DRIVE MOTOR FRAME		
			56 - 184	213 - 286	56 - 184	213 - 215	254 - 286
12"	16.125"	2.0"	--	--	13"	--	--
14"	18.125"	2.5"	--	--	13"	--	--
16"	20.125"	3.0"	--	--	13"	--	--
18"	22.125"	3.0"	--	--	13"	--	--
20"	24.125"	3.5"	--	--	13"	--	--
24"	29.625"	4.0"	18"	--	13"	14"	--
30"	35.625"	4.5"	18"	--	13"	14"	25"
36"	41.625"	5.0"	18"	28"	13"	14"	25"
42"	47.625"	5.0"	18"	28"	13"	14"	25"
48"	53.625"	5.0"	18"	28"	--	14"	25"
54"	59.657"	5.5"	18"	28"	--	--	--
60"	67.657"	6.0"	18"	28"	--	--	--

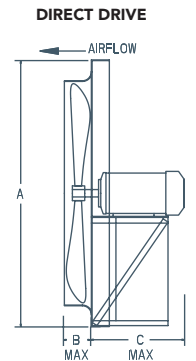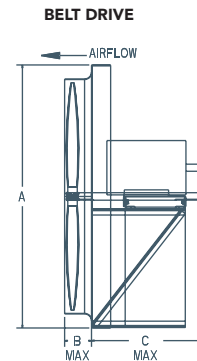

CABINET, BACK GUARD & SHUTTER (CBS)





BLADE DIAMETER	A X A SQUARE	B	C				
			BELT DRIVE MOTOR FRAME		DIRECT DRIVE MOTOR FRAME		
			56 - 184	213 - 286	56 - 184	213 - 215	254 - 286
12"	16.375"	--	--	--	26"	--	--
14"	18.375"	--	--	--	26"	--	--
16"	20.375"	--	--	--	26"	--	--
18"	22.375"	--	--	--	26"	--	--
20"	24.375"	--	--	--	26"	--	--
24"	29.875"	33"	--	--	33"	33"	--
30"	35.875"	33"	--	--	33"	33"	43"
36"	41.875"	33"	43"	33"	33"	33"	43"
42"	47.875"	33"	43"	33"	33"	33"	43"
48"	53.875"	33"	43"	--	33"	33"	43"
54"	59.9375"	33"	43"	--	--	--	--
60"	67.9375"	33"	43"	--	--	--	--



FRONT SLEEVE & SHUTTER (SLS)



BLADE DIAMETER	A X A SQUARE	B	C				
			BELT DRIVE MOTOR FRAME		DIRECT DRIVE MOTOR FRAME		
			56 - 184	213 - 286	56 - 184	213 - 215	254 - 286
12"	16.375"	15.0"	--	--	12"	--	--
14"	18.375"	15.0"	--	--	12"	--	--
16"	20.375"	15.0"	--	--	12"	--	--
18"	22.375"	15.0"	--	--	12"	--	--
20"	24.375"	15.0"	--	--	12"	--	--
24"	29.875"	19.0"	15"	--	10"	11"	--
30"	35.875"	19.0"	15"	--	10"	11"	22"
36"	41.875"	19.0"	15"	25"	10"	11"	22"
42"	47.875"	19.0"	15"	25"	10"	11"	22"
48"	53.875"	19.0"	15"	25"	--	11"	22"
54"	59.9375"	19.0"	15"	25"	--	--	--
60"	67.9375"	19.0"	15"	25"	--	--	--



REAR SLEEVE & BACK GUARD (SLB)



BLADE DIAMETER	A X A SQUARE	B	C				
			BELT DRIVE MOTOR FRAME		DIRECT DRIVE MOTOR FRAME		
			56 - 184	213 - 286	56 - 184	213 - 215	254 - 286
12"	16.375"	2.0"	--	--	15"	--	--
14"	18.375"	2.5"	--	--	15"	--	--
16"	20.375"	3.0"	--	--	15"	--	--
18"	22.375"	3.0"	--	--	15"	--	--
20"	24.375"	3.5"	--	--	15"	--	--
24"	29.875"	4.0"	19"	--	19"	19"	--
30"	35.875"	4.5"	19"	--	19"	19"	29"
36"	41.875"	5.0"	19"	29"	19"	19"	29"
42"	47.875"	5.0"	19"	29"	19"	19"	29"
48"	53.875"	5.0"	19"	29"	--	19"	29"
54"	59.9375"	5.5"	19"	29"	--	--	--
60"	67.9375"	6.0"	19"	29"	--	--	--

