


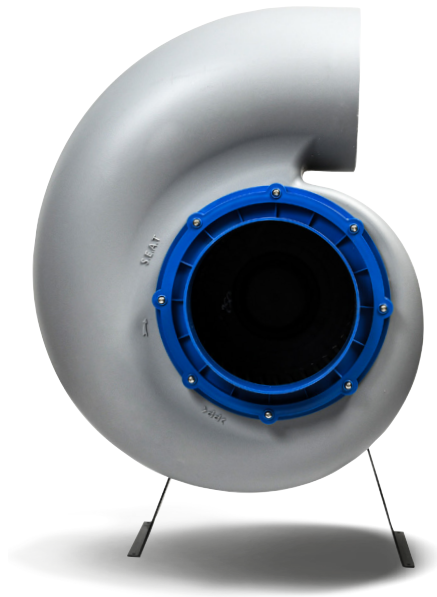

Plastec® Polypropylene Blowers


The PLASTEC series polypropylene blowers are designed to work in highly corrosive air applications such as laboratory exhaust or the chemical industry.

* Shown with optional motor support

Housings are constructed of strong, high-density UV treated polypropylene for maximum corrosion resistance. Housings are made of a single piece to avoid leaks. Housings are reversible and rotatable to any of the 8 standard discharge positions.

FEATURES

- Housings constructed of strong, high density UV treated polypropylene for maximum corrosion resistance.
- One piece housing to avoid leakage.
- Housing is reversible and rotatable to any of the 8 standard discharge positions.
- Wheels are both electronically and dynamically balanced.
- Direct drive, heavy duty ball bearing motors for continuous duty.
- Totally enclosed, fan cooled motors (TEFC) or high efficient explosion proof motors.

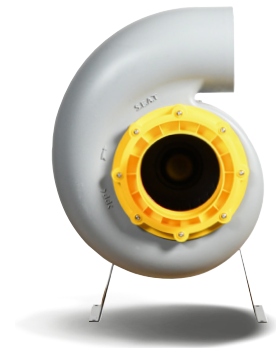

ACCESSORIES


- Weather hood enclosed pedestal for weather protection
- Metal Motor Supports
- Wall Mount Brackets
- Backdraft and Adjustable Dampers
- Exhaust Guards
- Poly Stacks
- Roof Curbs
- Reducers and Couplings

Plastec[®] Polypropylene Blowers

PERFORMANCE DATA

MODEL #				INLET/ OUTLET SIZE (OD) INCHES	RPM	HP	TYPICAL CFM @ SP									
SINGLE PHASE 115/230V	THREE PHASE 230/460V	THREE PHASE 575V	0"				1/4"	1/2"	3/4"	1"	1 1/2"	2"	2 1/2"	4"	5"	
TEFC																
15	P15SS6P025	P15ST6P025	-	4.92/4.92	1140	1/4	200	50	-	-	-	-	-	-	-	-
	P15SS4P033	P15ST4P033	P15CT4P033	4.92/4.92	1725	1/3	-	270	170	-	-	-	-	-	-	-
	P15SS2P050	P15ST2P050	P15CT2P050	4.92/4.92	3450	1/2	-	-	-	530	510	430	325	-	-	-
20	P20SS6P025	P20ST6P025	-	6.30/6.62	1140	1/4	-	500	350	-	-	-	-	-	-	-
	P20SS4P033	P20ST4P033	P20CT4P033	6.30/6.62	1725	1/3	-	-	800	700	600	100	-	-	-	-
	P20SS2P150	P20ST2P150	P20CT2P150	6.30/6.62	3450	1 1/2	-	-	-	-	-	-	-	-	1150	800
25	P25SS6P025	P25ST6P025	-	7.82/8.62	1140	1/4	-	1000	900	600	-	-	-	-	-	-
	P25SS4P075	P25ST4P075	P25CT4P075	7.82/8.62	1725	3/4	-	-	-	1500	1400	1100	500	-	-	-
	-	P25ST2P300	P25CT2P300	7.82/8.62	3450	3	-	-	-	-	-	-	-	-	-	2250
30	P30SS6P075	P30ST6P075	P30CT6P075	9.84/10.75	1140	3/4	-	2000	1800	1600	1400	-	-	-	-	-
	P30SS4P150	P30ST4P150	P30CT4P150	9.84/10.75	1725	1 1/2	-	-	-	-	-	2700	2350	2050	-	-
	-	P35ST8P200	-	12.75/12.75	850	2	-	-	3250	3000	2500	-	-	-	-	-
35	-	P35ST6P300	-	12.75/12.75	1140	3	-	-	-	-	4100	3750	3000	-	-	-
	-	P35ST4P1000	P35CT4P1000	12.75/12.75	1750	10	-	-	-	-	-	-	-	-	-	3500
	EXPLOSION PROOF															
15	P15XS4P033	P15XT4P033	-	4.92/4.92	1725	1/3	-	270	170	-	-	-	-	-	-	-
	P15XS2P050	P15XT2P050	-	4.92/4.92	3450	1/2	-	-	-	530	510	430	325	-	-	-
	P20XS4P033	P20XT4P033	-	6.30/6.62	1725	1/3	-	-	800	700	600	100	-	-	-	-
20	P20XS2P150	P20XT2P150	-	6.30/6.62	3450	1 1/2	-	-	-	-	-	-	-	-	1150	800
	P25XS4P075	P25XT4P075	-	7.82/8.62	1725	3/4	-	-	-	1500	1400	1100	500	-	-	-
	-	P25XT2P300	-	7.82/8.62	3450	3	-	-	-	-	-	-	-	-	-	2250
30	P30XS6P075	P30XT6P075	-	9.84/10.75	1140	3/4	-	2000	1800	1600	1400	-	-	-	-	-
	P30XS4P150	P30XT4P150	-	9.84/10.75	1725	1 1/2	-	-	-	-	-	2700	2350	2050	-	-

DIMENSIONS

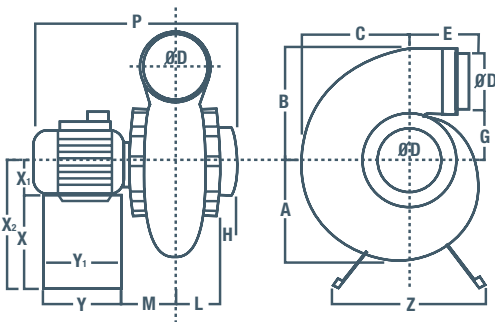

* Shown with optional motor support

P35	14.57"	22.44"	17.72"	12.75"
DIMENSION	MODEL	RPMs		
		1150	1725	3450
X1	P15	2 13/16"	2 13/16"	2 13/16"
X2		12 1/4"	12 1/4"	12 1/4"
X1	P20	2 13/16"	2 13/16"	3 1/8"
X2		12 1/4"	12 1/4"	12 5/8"
X1	P25	2 13/16"	3 1/8"	3 9/16"
X2		12 1/4"	12 5/8"	15 3/8"
P	P30	18 7/8"	20 1/2"	22 13/16"
X1		3 1/8"	3 9/16"	22 7/16"
X2		17 11/16"	18 1/8"	-
P		22 7/16"	23 5/8"	-

MODEL	A	B	C	D	E	G	H	L	M	P	Y	Y1	Z	X
P15	6 1/16"	9 7/8"	8"	4 7/8"	5 11/16"	4 3/4"	1 1/5"	2 3/4"	3 1/8"	14 1/4"	7 1/16"	6 5/16"	13 3/8"	9 7/16"
P20	8 3/16"	12 1/16"	9 7/16"	6 5/8"	6 3/16"	5 1/2"	1 1/3"	3 3/8"	3 11/16"	15 1/3"	7 1/16"	6 5/16"	13 3/8"	9 7/16"
P25	9 3/4"	14 3/4"	12 3/16"	8 5/8"	6 5/8"	6 1/8"	1 1/3"	3 3/4"	4 1/8"	-	7 1/16"	6 5/16"	16 1/2"	-
P30	11 3/16"	18 3/16"	14 11/16"	10 3/4"	7"	7 5/16"	1 1/3"	4 5/16"	4 3/4"	-	9 7/16"	8 11/16"	18 1/8"	-
P35	14.57"	22.44"	17.72"	12.75"	5.12"	10.04"	2.36"	5.91"	6.69"	28.50"	13.78"	12.36"	23.62"	18.43"



Plastec products are special non-standard items and are not-returnable and cannot be cancelled.