

Standard Wall Exhaust Fans WITH EC MOTOR

SD-EC SERIES



**FEATURING EC MOTORS
- UP TO 70% EFFICIENCY**



**ENERGY SAVINGS OF UP TO 70% OVER
REGULAR DUTY PSC MOTORS**

FEATURES

- Available in 8" to 36" sizes.
- High efficiency totally enclosed EC motor.
- Rugged steel welded box housing with durable powder coat finish.
- OSHA guard on intake side of fan.
- Shipped completely assembled.
- 8" - 24" sizes feature tie bar shutters and magnets for quieter operation and superior seal.



ACCESSORIES

- Grey plastic weather hood
- Galvanized metal hood
- 0V to 10V Control

AIR CHANGES PER MINUTE

Application	Minutes per Air Change	Application	Minutes per Air Change
Assembly Hall	7	Church	15
Attic	2	Classroom	6
Auditorium	10	Dance Hall	5
Barber Shop	6	Department Store	6
Basement	8	Dry Cleaning	5
Battery Room	4	Engine Room	6
Boiler Room	1	Factory	6
Bowling Alley	5	Forge Room	3
Foundry	4	Pressing Room	1
Garage	5	Projection Booth	2
General Office	10	Summer Cooling	1
Gymnasium	8	Toilet	3
Laundry	2	Transformer Room	1
Locker Room	3	Warehouse	12
Machine Shop	8	Welding Shop	2
Plating Room	3		

To determine the proper fan for your applications, use the following formula.

Number of cubic feet in room / Number of minutes per air change
= Required CFM Capacity

EXAMPLE: A general office, (see chart) which requires an air change every ten minutes, would require the following fan capacity.

If the office is 100' x 40' x 10' = 40,000 cubic ft
40,000 cubic ft / 10 minutes per air change = 4000 Required CFM

From the chart, you would select a fan that is rated at 4000 CFM at 1/8" S.P. (Static Pressure)

SD-EC SERIES

Standard

Wall Exhaust Fans

with EC Motor WITH EC MOTOR


PERFORMANCE SPECIFICATIONS

MODEL	SPEED	BLADE DIAMETER	RPM	HP	VOLTAGE	AMPS (FLA)	WEIGHT (LBS)	dB(A) @5 ft	CFM @ STATIC PRESSURE				FRAMING DIMENSIONS
									0.00"	0.10"	0.125"	0.25"	
SD8-ECV	Variable	8"	1800	1/4	115/208-280	2.8/1.7-1.3	12	48	360	270	230	0	11" X 11"
SD10-ECV	Variable	10"	1800	1/4	115/208-280	2.8/1.7-1.3	13	56	690	590	570	0	13" X 13"
S12-EC	Variable	12"	1800	1/4	115/208-280	2.8/1.7-1.3	32	60	1650	1540	1510	1390	15" X 15"
S14-EC	Variable	14"	1800	1/4	115/208-280	2.8/1.7-1.3	34	65	2180	2080	2060	1890	17" X 17"
S16-EC	Variable	16"	1800	1/4	115/208-280	2.8/1.7-1.3	36	63	2370	2270	2210	2063	19" X 19"
S18-EC	Variable	18"	1800	1/2	115/208-280	3.5/2.2-1.7	37	73	3200	3090	3040	2920	21" X 21"
S20-EC	Variable	20"	1800	1/2	115/208-280	5.3/3.3-2.6	45	77	3440	3240	3180	2930	23" X 23"
SD24-EC	Variable	24"	1200	1/2	115/208-280	5.7/3.5-2.8	56	70	5050	4910	4810	4400	27" X 27"
SD30-EC	Variable	30"	1000	3/4	115/208-280	9.5/5.2-4.2	72	82	8000	7000	6000	5000	33" X 33"
SD36-EC	Variable	36"	1000	3/4	115/208-280	9.5/5.2-4.2	88	84	10000	8500	8000	6200	39" X 39"

subject to change without notice.

DIMENSIONS

FAN SIZE	A X A SQUARE	B	C	D (c/c)	E	N
8"	13 1/4"	13 1/2"	4"	12"	10 3/4"	2
10"	15 1/4"	13 1/2"	4"	14"	12 3/4"	2
12"	17 1/4"	16 1/2"	6"	16"	14 3/4"	3
14"	19 1/4"	16 1/2"	6"	18"	16 3/4"	3
16"	21 1/4"	16 1/2"	6"	20"	18 3/4"	4
18"	23 1/4"	16 1/2"	6"	22"	20 3/4"	4
20"	25 1/4"	17"	6 3/4"	24"	22 3/4"	5
24"	29 1/4"	18"	6 3/4"	28"	26 3/4"	5
30"	35 1/4"	19"	6"	34"	32 3/4"	16
36"	41 1/4"	19"	6"	40"	38 3/4"	20

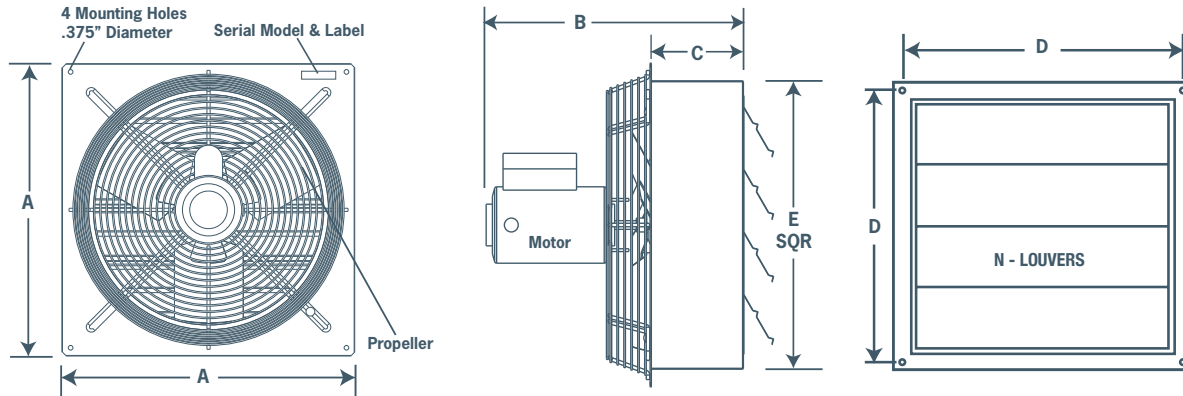

2 Speed Standard Wall Exhaust Fans

WITH EC MOTOR

SD08-EC, SD10-EC

**FEATURING EC MOTORS
- UP TO 70% EFFICIENCY**



**ENERGY SAVINGS OF UP TO 70% OVER
REGULAR DUTY PSC MOTORS**

FEATURES

- Smooth, quiet, reliable, maintenance free operation.
- Durable steel construction with grey powder coat finish.
- 8" and 10" sizes.
- High efficiency EC motor
- 2 speed with optional speed control CNSC08/10EC (sold separately)
- Totally enclosed with sealed ball bearings
- Quiet, aluminum shutters with tie bar to maximize airflow and a magnet to prevent flapping and provide a superior seal.
- Zinc plated OSHA guard.
- Fans fully assembled.
- Easy to install. Mount fan using four screws.

ACCESSORIES

- Grey plastic weather hood
- Galvanized metal hood
 - 2 speed switch
 - Thermostat

AIR CHANGES PER MINUTE

To determine the proper fan for your applications, use the following formula.

Number of cubic feet in room / Number of minutes per air change
= Required CFM Capacity

EXAMPLE: A general office, (see chart) which requires an air change every ten minutes, would require the following fan capacity.

If the office is 100' x 40' x 10' = 40,000 cubic ft
40,000 cubic ft / 10 minutes per air change = 4000 Required CFM

From the chart, you would select a fan that is rated at 4000 CFM at 1/8" S.P. (Static Pressure)

Application	Minutes per Air Change	Application	Minutes per Air Change
Assembly Hall	7	Church	15
Attic	2	Classroom	6
Auditorium	10	Dance Hall	5
Barber Shop	6	Department Store	6
Basement	8	Dry Cleaning	5
Battery Room	4	Engine Room	6
Boiler Room	1	Factory	6
Bowling Alley	5	Forge Room	3
Foundry	4	Pressing Room	1
Garage	5	Projection Booth	2
General Office	10	Summer Cooling	1
Gymnasium	8	Toilet	3
Laundry	2	Transformer Room	1
Locker Room	3	Warehouse	12
Machine Shop	8	Welding Shop	2
Plating Room	3		


PERFORMANCE SPECIFICATIONS

MODEL	BLADE DIAMETER	HP	SPEED	VOLTAGE	MAX AMPS	RPM	CFM	dB(A) @5 ft	WEIGHT (LBS)
SD08-EC	8"	32W	2 Speed	115	0.27	1800/1300	360/300	48	13
SD10-EC	10"	32W	2 Speed	115	0.27	1800/1300	690/580	55	15


Please note: The above is subject to change without notice as these are still in development.

DIMENSIONS

MODEL	A x A SQUARE	B	C	D (c/c)	E SQR	N (# OF LOUVRES)	FRAMING
SD08-EC	13 x 13	8 7/8"	5 3/16"	11"	9 3/4"	2	10" x 10"
SD10-EC	15 x 15	8 7/8"	5 3/16"	13"	11 3/4"	3	12" x 12"

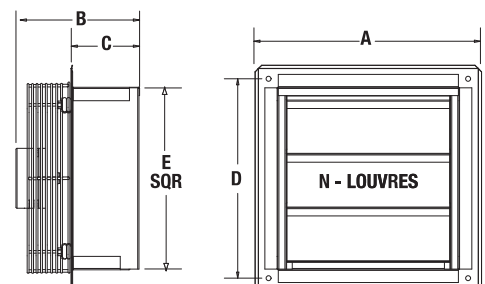


Options & Accessories Wall Exhaust Fan Hoods



GH GALVANIZED HOODS

- Economical shipping.
- Easy to assemble, galvanized hood.
- No screens.




GH KNOCK DOWN HOODS

- Easy to assemble, galvanized hood.
- Includes bird screen.




WHA HOODS

- For AX fans.
- Shipped fully assembled.
- 18 gauge galvanized weather hoods complete with bird screen.
- Optional insect screen available. Consult factory.



WHP HOODS

- For Panel fans.
- 18 gauge galvanized weather hoods complete with bird screen.
- Optional insect screen available. Consult factory.



INTAKE & EXHAUST HOODS

- Shipped fully assembled.
- 18 gauge galvanized weather hoods complete with bird screen.



PLASTIC HOODS

- Rugged, grey plastic hood.
- No screens.

HOOD MODEL	DIMENSIONS		APPROX. WEIGHT (LBS)	FANS THAT WILL FIT
	INSIDE DIMENSIONS	OUTSIDE DIMENSIONS		
GH GALVANIZED HOODS				
GH-XF12-M	14.75"W X 14.0"H	18"W X 15.75"H	4	XF12 / XB12 / SD8 / SD10 / AX8 / AX10 / AX12
GH-XF16-M	18.75"W 17.75"H	22"W X 19.75"H	7	XF16 / XB12 / HV12 / HVA12 / ADD12 / DDP12 / DDS12 / SD12-14 / AX14-16
GH-XF20-M	22.75"W X 22"H	26"W X 23.75"H	9	XF20 / XB14 / XB16 / HV14-16 / HVA14-16 / ADD14-16 / DDP14-16 / DDS14-16 / SD16-18 / AX18-20
GH-XF24-M	26.75"W 26"H	29"W X 27.25"H	12	XFS24
GH KNOCKDOWN HOODS				
GH-KD24	31.65"W X 31.66"H	34.65"W X 34.69"H	31	XB24 / HV24 / HVA24 / ADD24 / DDP24 / DDS24 / SD24 / AX24
GH-KD36	43.62"W X 43.93"H	46.62"W X 46.82"H	75	XB30-36 / HV30-36 / HVA30-36 / ADD30-36 / DDS30-36 / SD30-36 / AX30-36 / AX42
GH-KD48	55.62"W X 55.25"H	58.62"W X 58.82"H	TBA	XB42-48 / HV42-48 / HVA42-48 / ADD42-48 / DDS42-48 / SD42 / AX42
GH-KD60	69.76"W X 69.92"H	72.76"W X 72.95"H	TBA	XB54-60 / HV54-60 / HVA54-60 / ADD54-60
WHA HOODS				
WHA8-10	12.11"W X 12.11"H	-	13	AX08-10, SD8
WHA12	14.05"W X 14.05"H	-	16	AX12, SD10
WHA14	16.11"W X 16.11"H	-	22	AX14, SD12
WHA16	18.11"W X 18.11"H	-	26	AX16, SD14
WHA18	20.11"W X 20.11"H	-	29	AX18, SD16
WHA20	22.05"W X 22.05"H	-	31	AX20, SD18
WHA24	26.05"W X 26.05"H	-	47	AX24
WHA30	33.05"W X 33.05"H	-	59	AX30
WHA36	39.11"W X 39.11"H	-	76	AX36
WHP HOODS				
WH8-10P	14.45"W x 14.45"H	-	20	P08 / P10
WH12P	17.40"W X 17.40"H	-	16	P12
WH14P	19.20"W X 19.20"H	-	24	P14
WH16P	21.20"W X 21.20"H	-	26	P16
WH18P	23.20"W X 23.20"H	-	29	P18
WH20P	25.20"W X 25.20"H	-	44	P20
WH24P	29.15"W X 29.15"H	-	44	P24
WH30P	35.65"W X 35.65"H	-	60	P30
WH36P	41.65"W X 41.65"H	-	77	P36
EXHAUST / INTAKE / WEATHER HOODS				
EH12	16.55"W X 16.55"H	-	9	XF12 / SD8-12 / AX8-14 / XB12 / HV12 / HVA12 / ADD12 / DDP12 / DDS12
EH14	18.60"W X 18.60"H	-	15	XB14 / HV14 / HVA14 / ADD14 / DDP14 / DDS14 / SD14 / XF16 / AX16
EH16	20.60"W X 20.60"H	-	20	AX18 / SD16 / XB16 / HV16 / HVA16 / ADD16 / DDP16 / DDS16
EH18	22.55"W X 22.55"H	-	31	SD18 / XB18 / HV18 / HVA18 / ADD18 / DDP18 / DDS18 / XF20 / AX20
EH20	24.55"W X 24.55"H	-	44	SD20 / XB20 / XF24 / HV20 / HVA20 / ADD20 / DDP20 / DDS20
EH24	30.05"W X 30.05"H	-	60	SD24 / AX24 / XB24 / ADD24 / HV24 / HVA24 / DDP24 / DDS24
EH30	36.35"W X 36.35"H	-	72	SD30 / AX30 / XB30 / HV30 / HVA30 / ADD30 / DDS30 / JFHVA24
EH36	42.30"W X 42.30"H	-	104	SD36 / AX36 / XB36 / HV36 / HVA36 / ADD36 / DDS36 / JFHVA30
EH42	48.63"W X 48.63"H	-	163	XB42 / HV42 / HVA42 / ADD42 / DDS42 / JFHVA36 / SD42 / AX42
EH48	54.64"W X 54.64"H	-	TBA	XB48 / HV48 / HVA48 / ADD48 / DDS48 / JFHVA42
EH54	61.20"W X 61.20"H	-	TBA	XB54 / HV54 / HVA54 / ADD54 / JFHVA48
EH60	69.39"W X 69.39"H	-	TBA	XB60 / HV60 / HVA60 / ADD60
PLASTIC HOODS				
HFP-18G	21.50"W X 21.75"H	-	9	S8 / S10 / S12 / S14 / S16 / S18V / AX08 / AX10 / AX12 / AX14 / AX16 / AX18
HFP-24G	27.50"W X 27.75"H	-	13	S20 / S24 AX20 / AX24


Options & Accessories EC Motor Speed Controls

CNEC CONTROLS

Our EC motors accept a 0-10v control from a remote potentiometer. The "pot" can be located up to 100 feet away from the motor. This will give the motor full variable speed based on the min and max rpm set at factory.

Part numbers for the pot and wiring harnesses are as follows:

MODEL	DESCRIPTION
CNEC-0-10V-1FT *	Plastic housed potentiometer switch
CNEC-POT *	Remote potentiometer
CNEC-10V	EC Motor Control - 0 to 10 V
CNEC-1FT	1 ft control cable
CNEC-4FT	4 ft control cable
CNEC-10FT	10 ft control cable
CNEC-50FT	50 ft control cable
CNEC-100FT	100 ft control cable

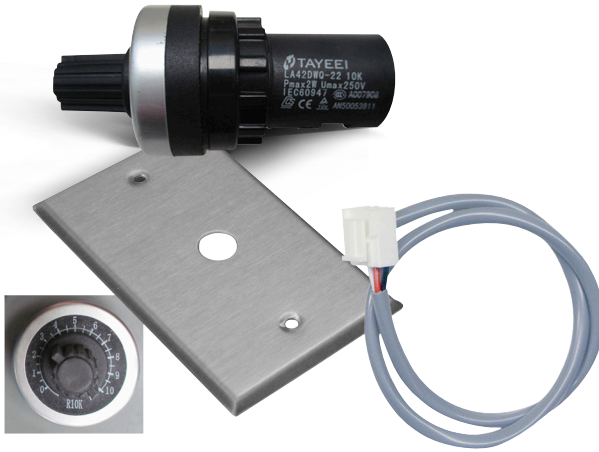

CNEC-0-10V-1FT



CNEC-POT



CNEC-10V