



Plastec® Polypropylene Blowers

STORM SERIES

Designed to exhaust fumes from highly corrosive environments such as laboratory exhaust or the chemical industry, especially those with high static pressure and low CFM.

* Shown with optional motor support

3 sizes available from 3" to 6" inlet/outlet. It is an excellent system for Scrubber Applications and other systems requiring low airflow at higher static pressure. Suitable for many applications such as acid tank ventilation, hood exhaust, commercial washers wastewater, chemical cabinets/rooms, etc.

FEATURES

- Polypropylene casing and wheel recommended up to 190°F.
- Housing shall be constructed of strong high-density UV treated polypropylene for maximum corrosion resistance.
- Housing is made of one piece to avoid leaks.
- Housing is rotatable to any of the 8 standard discharge positions.
- Wheels are both electronically and dynamically balanced.
- Direct drive, heavy-duty ball bearing type motors for continuous duty.

ACCESSORIES

- Weather hood enclosed pedestal for weather protection
- Metal Motor Supports
- Wall Mount Brackets
- Backdraft and Adjustable Dampers
- Exhaust Guards
- Poly Stacks
- Roof Curbs
- Reducers and Couplings



WH4 PEDESTAL
WEATHER HOOD



WH3 PEDESTAL
WEATHER HOOD


STORM SERIES

Plastec® Polypropylene Blowers

PERFORMANCE DATA

MODEL	MODEL #			INLET/ OUTLET SIZE (OD) INCHES	RPM	HP	TYPICAL CFM @ SP							
	SINGLE PHASE 115/230V	THREE PHASE 230/460V	THREE PHASE 575V				1/4"	1/2"	3/4"	1"	1 1/2"	2"	2 1/4"	
	TEFC													
	10	S10SS4P012	-	-	2.95/2.95	1725	1/8	60	40	-	-	-	-	-
		S10SS2P016	S10ST2P016	S12CT4P033	2.95/2.95	3450	1/6	-	-	135	125	100	75	50
	12	S12SS4P033	S12ST4P033	S12CT4P033	3.54/3.54	1725	1/3	225	190	150	125	-	-	-
	14	S14SS4P050	S14ST4P050	S14CT4P050	4.53/4.53	1725	1/2	-	-	-	-	400	100	-
	EXPLOSION PROOF													
	10	S10XS4P033	-	-	2.95/2.95	1725	1/3	60	40	-	-	-	-	-
		S10XS2P033	-	-	2.95/2.95	3450	1/3	-	-	135	125	100	75	50
12	S12XS4P033	S12XT4P033	-	3.54/3.54	1725	1/3	225	190	150	125	-	-	-	
14	S14XS4P050	-	-	4.53/4.53	1725	1/2	-	-	-	-	400	100	-	

DIMENSIONS

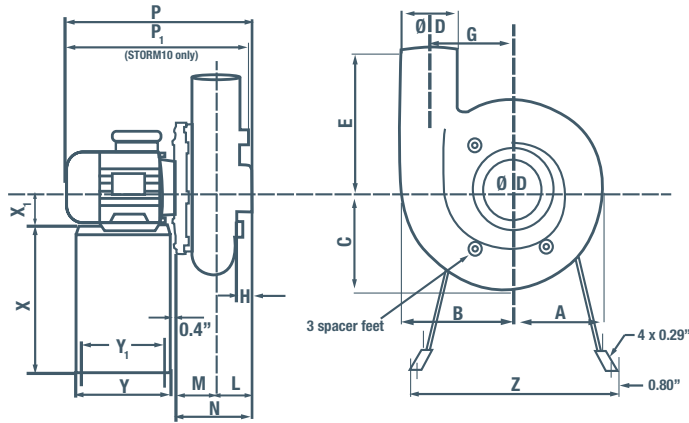

MODEL	A	B	C	D	E	G	H	L	M	N	Y	Y1	Z	X
STORM10	4.53	5.31	5.00	2.95	6.22	3.82	1.26	1.90	2.24	4.14	7.09	6.3	13.39	9.45"
	P1	P	X1	MOTOR TYPE										
	10.73"	11.88"	2.30"	Single Phase .12 HP 4 Pole										
	13.75"	14.90"	3.16"	Single Phase .16 HP 2 Pole										
	18.00"	19.15"	3.43"	Single Phase .12 HP 4 Pole										

MODEL	WHEEL DIAMETER	A	B	C	D	E	G	H	L	M	N	P	Y	Y1	Z	X	X1
STORM12	7.75"	5.71"	6.89"	6.42"	3.54"	8.35"	5.12"	1.77"	3.15"	2.83"	5.98"	13.78"	7.09"	6.3"	13.39"	9.45"	2.8"
STORM14	9.75"	7.4"	9.13"	8.94"	4.53"	10.58"	6.69"	4.17"	6.33"	3.27"	9.6"	19.05"	7.125"	6.3"	13.39"	11.75"	3.15"
STORM16	11.75"	9.25"	11.34"	10.94"	6.5"	12.31"	8.07"	1.57"	3.94"	3.82"	7.76"	18.78"	13.78"	12.36"	23.62"	18.43"	4.41"

Metal stand does not come standard with fan.
Motor frame sizes may vary upon type of motor used.