


Medium Duty Belt Drive Wall Exhaust Fans

XB SERIES

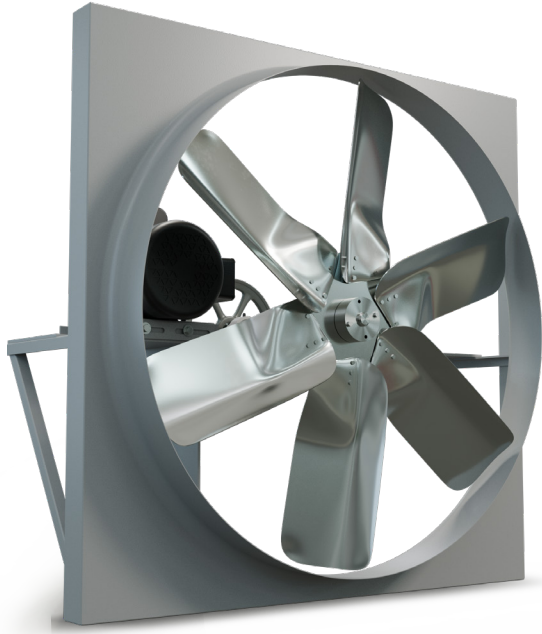

Designed for commercial and medium duty industrial exhaust applications.

XB series fans are typically used for low pressure applications with little or no duct work.


The XB series is designed and constructed for efficient and economical operation at low speeds and low noise levels.

Applications include factories, warehouses, gymnasiums, underground parking garages, etc.

These fans are used for exhaust applications. For supply applications, please see SXB supply fans.


FEATURES

- Heavy gauge steel fan panel with deep spun and flared venturi for maximum efficiency.
- Heavy gauge welded steel motor and bearing supports.
- Heavy duty cast iron pillow block bearings.
- TEFC motors are standard.



DIMENSIONS

MODEL	BLADE DIAMETER	A X A SQUARE	B	C (BELT DRIVE MOTOR FRAME)	
				56 - 184	213 - 286
XB24	24"	29.625"	4.0"	18"	--
XB30	30"	35.625"	4.5"	18"	--
XB36	36"	41.625"	5.0"	18"	28"
XB42	42"	47.625"	5.0"	18"	28"
XB48	48"	53.625"	5.0"	18"	28"
XB54	54"	59.657"	5.5"	18"	28"
XB60	60"	67.657"	6.0"	18"	28"

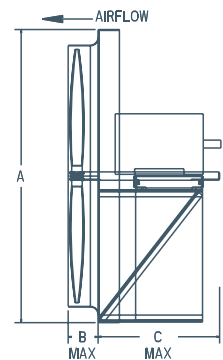

OPTIONS



For fan complete with cabinet/guard and shutter, substitute "T" with CBS



For fan complete with front sleeve and shutter, substitute "T" with SLS



For fan with rear sleeve and back guard, substitute "T" with SLB

XB SERIES

Medium Duty

Belt Drive Wall Exhaust Fans

PERFORMANCE SPECIFICATIONS

	MODEL #	WEIGHT (LBS.)	RPM	HP	dBA @ 5 ft	CFM @ STATIC PRESSURE																							
						0"				1/8"				1/4"				3/8"				1/2"				5/8"			
						CFM	BHP	FEI	FEPAct (kW)	CFM	BHP	FEI	FEPAct (kW)	CFM	BHP	FEI	FEPAct (kW)	CFM	BHP	FEI	FEPAct (kW)	CFM	BHP	FEI	FEPAct (kW)	CFM	BHP	FEI	FEPAct (kW)
BLADE DIAMETER	24"	XB24T10033	115	649	1/3	61	4400	0.33	-	3400	0.33	-	-	1900	0.33	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		XB24T10050	115	729	1/2	65	4600	0.38	-	3900	0.41	-	-	2500	0.44	-	-	1700	0.49	-	-	-	-	-	-	-	-	-	-
		XB24T10075	115	766	3/4	70	4900	0.46	-	4200	0.48	-	-	2800	0.51	-	-	2100	0.56	-	-	1200	0.65	-	-	-	-	-	-
		XB24T10100	133	898	1.0	73	5700	0.72	0.88	0.73	5200	0.76	0.99	0.76	4200	0.8	0.96	0.80	3100	0.83	0.84	0.83	2600	0.92	0.76	0.91	-	-	-
	30"	XB30T10033	128	470	1/3	59	6500	0.25	-	4600	0.29	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		XB30T10050	129	565	1/2	63	7800	0.43	-	6700	0.49	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		XB30T10075	129	640	3/4	66	8800	0.62	-	8000	0.68	-	-	4900	0.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		XB30T10100	148	715	1.0	69	9800	0.85	1.21	0.84	9200	0.95	1.33	0.93	7600	1	1.30	0.98	-	-	-	-	-	-	-	-	-	-	-
	36"	XB36T10050	129	830	1.5	73	11400	1.34	0.92	1.28	10900	1.44	1.06	1.37	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		XB36T10075	161	410	1/2	59	9300	0.35	-	7000	0.43	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		XB36T10100	160	483	3/4	63	11000	0.58	-	9600	0.68	-	-	5200	0.72	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		XB36T10150	180	515	1.0	67	11700	0.7	1.69	0.71	10500	0.8	1.74	0.80	6000	0.82	1.27	0.82	4100	0.99	0.91	0.97	-	-	-	-	-	-	-
	42"	XB42T10150	160	628	1.5	71	14300	1.27	1.18	1.22	13400	1.39	1.32	1.32	11700	1.3	1.44	-	7200	1.48	1.02	1.40	-	-	-	-	-	-	-
		XB42T10200	203	675	2.0	73	15400	1.59	1.03	1.49	14600	1.72	1.18	1.61	13300	1.85	1.23	1.72	10600	1.93	1.13	1.79	7100	1.99	0.88	1.84	-	-	-
		XB42T10075	211	330	3/4	58	11700	0.35	-	7900	0.43	-	-	2700	0.59	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		XB42T10100	230	388	1.0	63	13800	0.57	2.34	0.60	11400	0.68	2.16	0.70	5300	0.83	1.13	0.83	2600	1	0.62	0.98	-	-	-	-	-	-	-
	48"	XB48T10150	207	470	1.5	68	16700	1	1.69	0.98	15200	1.14	1.77	1.10	11600	1.25	1.56	1.20	6200	1.48	0.90	1.40	-	-	-	-	-	-	-
		XB48T10200	248	510	2.0	71	18100	1.28	1.46	1.23	16700	1.41	1.59	1.34	14100	1.59	1.49	1.49	8000	1.72	0.98	1.61	5700	1.98	0.73	1.83	-	-	-
		XB48T10300	264	590	3.0	75	21000	2	1.11	1.85	19900	2.16	1.27	1.98	18200	2.34	1.32	2.14	15300	2.48	1.26	2.26	9400	2.67	0.86	2.42	7200	2.98	0.69
		XB48T10100	257	338	1.0	63	18000	0.7	2.48	0.72	14900	0.84	2.29	0.84	6700	0.99	1.18	0.97	-	-	-	-	-	-	-	-	-	-	-
	54"	XB48T10150	236	380	1.5	67	20100	0.97	2.06	0.96	17900	1.13	2.08	1.10	9500	1.26	1.29	1.21	5600	1.5	0.81	1.42	-	-	-	-	-	-	-
		XB48T10200	281	425	2.0	70	22600	1.38	1.67	1.31	20700	1.53	1.80	1.44	16700	1.72	1.62	1.61	9000	1.92	0.98	1.78	-	-	-	-	-	-	-
		XB48T10300	290	494	3.0	74	26200	1.3	2.02	1.24	24700	1.47	2.21	1.39	22300	1.48	2.44	1.40	17700	0.92	3.57	0.91	10600	0.87	2.69	0.87	-	-	-
		XB48T10500	312	600	5.0	80	31800	3.83	0.89	3.40	30600	4.05	1.05	3.58	29200	4.31	1.16	3.80	26900	4.73	1.16	4.15	23500	4.85	1.15	4.25	15000	4.99	0.83
	60"	XB54T10150	316	322	1.5	65	22400	1.25	1.81	1.20	19200	1.38	1.85	1.31	11500	1.49	1.32	1.41	-	-	-	-	-	-	-	-	-	-	-
		XB54T10200	359	350	2.0	68	24300	1.6	1.56	1.50	21700	1.75	1.67	1.63	15700	1.85	1.43	1.72	9800	1.99	1.03	1.84	-	-	-	-	-	-	-
		XB54T10300	370	409	3.0	72	28400	2.55	1.17	2.31	26300	2.71	1.33	2.45	22600	2.89	1.33	2.60	16100	2.99	1.11	2.69	-	-	-	-	-	-	-
		XB54T10500	380	479	5.0	76	33300	4.11	0.86	3.63	31600	4.29	1.02	3.78	29200	4.47	1.12	3.93	25500	4.7	1.11	4.12	19700	4.78	0.99	4.19	15000	4.98	0.83
	60"	XB60T10750	492	557	7.5	81	38700	6.45	0.45	5.58	37300	6.68	0.78	5.77	35600	6.89	0.89	5.95	33200	7.13	0.96	6.15	29800	7.36	0.97	6.34	25400	7.47	0.93
		XB60T10150	363	265	1.5	64	25500	0.77	3.15	0.78	20900	0.98	2.72	0.96	8700	1.16	1.29	1.12	4800	1.47	0.72	1.39	-	-	-	-	-	-	-
		XB60T10200	405	307	2.0	66	29500	1.19	2.44	1.15	25600	1.44	2.32	1.37	12800	1.6	1.36	1.50	9300	1.98	0.98	1.83	-	-	-	-	-	-	-
		XB60T10300	416	355	3.0	70	34100	1.83	1.89	1.70	30800	2.15	1.91	1.97	26800	2.42	1.84	2.20	13300	2.62	1.05	2.37	10800	2.99	0.88	2.69	-	-	-
	60"	XB60T10500	430	446	5.0	76	42900	3.65	1.23	3.24	40300	4.04	1.36	3.57	37500	4.38	1.45	3.86	34400	4.7	1.48	4.12	22400	4.91	1.09	4.30	-	-	-
		XB60T10750	539	511	7.5	81	49100	5.47	0.95	4.77	46900	5.92	1.09	5.14	44500	6.36	1.19	5.51	42000	6.72	1.27	5.81	36900	7.06	1.23	6.09	-	-	-

For three phase motors, substitute *** with "M" for 230/460 volt or "P" for 575 volt. If 208V is required please specify.

Fan tested in accordance with AMCA Standard 210 in a figure 12A configuration using the "T" frame model.

FEP for models using a single-phase motor are determined using AMCA Standard 214-21, method 6.3 using standard air density and V-belt drive.

FEP for models using a three-phase motor are determined using AMCA Standard 214-21, method 6.4 using standard air density, V-belt drive, 4 pole TEFC motors without VFD.

dBA ratings shown are measured at 0" static pressure and should be used as a guideline only.

Power rating does not include transmission losses.

Performance ratings do not include the effects of appurtenances.

Operation of the axial impeller in a configuration different from the published test configuration will affect performance.

Options & Accessories for Standard Wall Exhaust Fans

CABINET, BACK GUARD & SHUTTER (CBS)



FRONT GUARDS

Front guards available, consult factory.

Wire mesh not available on all sizes.



FRONT SLEEVE & SHUTTER (SLS)




STEEL CONTROL & MOTORIZED CONTROL DAMPERS

Motorized steel control dampers can be mounted in fan cabinet or sleeve in either exhaust or intake applications. Consult factory.



REAR SLEEVE & BACK GUARD (SLB)

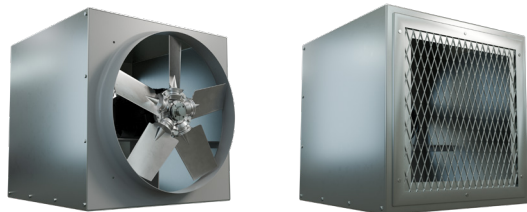

SPECIAL COATING

For most applications, Canarm's standard enamel paint will provide the necessary surface protection for painted parts. For special requirements, coatings such as hot dipped galvanizing and epoxy, please consult factory.

DISCONNECT SWITCHES

Wire disconnect switches are available.

MOTOR OPTIONS

TWO SPEED MOTOR

Two speed motors are available for some of Canarm's exhaust fans. 1800/1200 or 1800/900 RPM variable torque, single and three phase. Consult factory for available voltages and configurations.



Explosion Proof MOTORS (direct drive only)

Some of Canarm exhaust fans can be equipped with Explosion Proof Motors for hazardous locations. Class I, Groups C & D - Class II, Groups F & G. Consult factory for models.



Class I, Group C	Atmospheres containing ethyl ether, ethylene, gases or vapors of equivalent hazard.
Class I, Group D	Atmospheres such as acetone, ammonia, benzene, butane, cyclopropane, ethanol, gasoline, hexane, methane, natural gas, naphtha, propane, or gasses or vapors of equivalent hazard.
Class II Group F	Atmospheres containing carbonaceous dust, including carbon black, charcoal, coal, or coke dusts that have more than 8% total entrapped volatiles, or dusts that have been sensitized by other materials so that they present an explosion hazard.
Class II Group G	Atmospheres containing combustible dusts not included in group E or F, including flour, grain, wood, plastic and chemicals.

Options & Accessories for Standard Wall Exhaust Fans

VENTURI





BLADE DIAMETER	A X A SQUARE	B	C		DIRECT DRIVE MOTOR FRAME		
			BELT DRIVE MOTOR FRAME		56 - 184	213 - 215	254 - 286
12"	16.125"	2.0"	--	--	13"	--	--
14"	18.125"	2.5"	--	--	13"	--	--
16"	20.125"	3.0"	--	--	13"	--	--
18"	22.125"	3.0"	--	--	13"	--	--
20"	24.125"	3.5"	--	--	13"	--	--
24"	29.625"	4.0"	18"	--	13"	14"	--
30"	35.625"	4.5"	18"	--	13"	14"	25"
36"	41.625"	5.0"	18"	28"	13"	14"	25"
42"	47.625"	5.0"	18"	28"	13"	14"	25"
48"	53.625"	5.0"	18"	28"	--	14"	25"
54"	59.657"	5.5"	18"	28"	--	--	--
60"	67.657"	6.0"	18"	28"	--	--	--

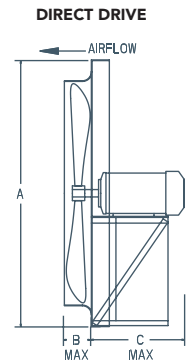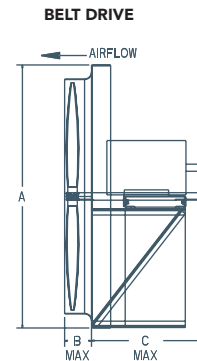

CABINET, BACK GUARD & SHUTTER (CBS)





BLADE DIAMETER	A X A SQUARE	B	C		DIRECT DRIVE MOTOR FRAME		
			BELT DRIVE MOTOR FRAME		56 - 184	213 - 215	254 - 286
12"	16.375"	--	--	--	26"	--	--
14"	18.375"	--	--	--	26"	--	--
16"	20.375"	--	--	--	26"	--	--
18"	22.375"	--	--	--	26"	--	--
20"	24.375"	--	--	--	26"	--	--
24"	29.875"	33"	--	33"	33"	--	--
30"	35.875"	33"	--	33"	33"	43"	--
36"	41.875"	33"	43"	33"	33"	33"	43"
42"	47.875"	33"	43"	33"	33"	33"	43"
48"	53.875"	33"	43"	--	33"	43"	--
54"	59.9375"	33"	43"	--	--	--	--
60"	67.9375"	33"	43"	--	--	--	--



FRONT SLEEVE & SHUTTER (SLS)



BLADE DIAMETER	A X A SQUARE	B	C		DIRECT DRIVE MOTOR FRAME		
			BELT DRIVE MOTOR FRAME		56 - 184	213 - 215	254 - 286
12"	16.375"	15.0"	--	--	12"	--	--
14"	18.375"	15.0"	--	--	12"	--	--
16"	20.375"	15.0"	--	--	12"	--	--
18"	22.375"	15.0"	--	--	12"	--	--
20"	24.375"	15.0"	--	--	12"	--	--
24"	29.875"	19.0"	15"	--	10"	11"	--
30"	35.875"	19.0"	15"	--	10"	11"	22"
36"	41.875"	19.0"	15"	25"	10"	11"	22"
42"	47.875"	19.0"	15"	25"	10"	11"	22"
48"	53.875"	19.0"	15"	25"	--	11"	22"
54"	59.9375"	19.0"	15"	25"	--	--	--
60"	67.9375"	19.0"	15"	25"	--	--	--



REAR SLEEVE & BACK GUARD (SLB)



BLADE DIAMETER	A X A SQUARE	B	C		DIRECT DRIVE MOTOR FRAME		
			BELT DRIVE MOTOR FRAME		56 - 184	213 - 215	254 - 286
12"	16.375"	2.0"	--	--	15"	--	--
14"	18.375"	2.5"	--	--	15"	--	--
16"	20.375"	3.0"	--	--	15"	--	--
18"	22.375"	3.0"	--	--	15"	--	--
20"	24.375"	3.5"	--	--	15"	--	--
24"	29.875"	4.0"	19"	--	19"	19"	--
30"	35.875"	4.5"	19"	--	19"	19"	29"
36"	41.875"	5.0"	19"	29"	19"	19"	29"
42"	47.875"	5.0"	19"	29"	19"	19"	29"
48"	53.875"	5.0"	19"	29"	--	19"	29"
54"	59.9375"	5.5"	19"	29"	--	--	--
60"	67.9375"	6.0"	19"	29"	--	--	--

