


USER MANUAL

GMC Radiation Monitor

Home Assistant Add-on - Version 9.0.0

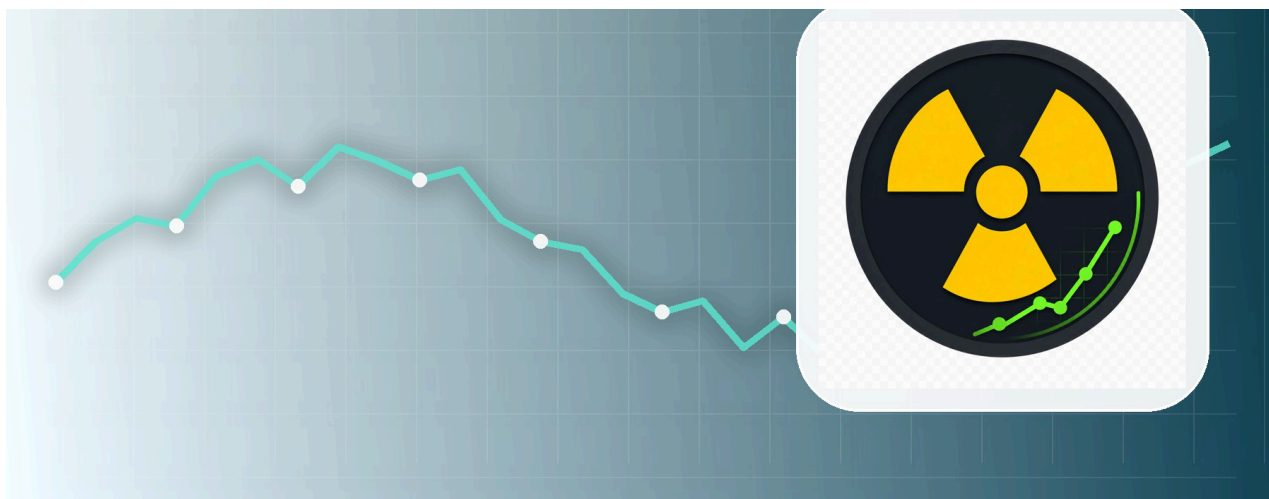

For beginners, users and administrators

July 2026 edition

About this manual

This manual explains the GMC Radiation Monitor add-on in plain language. It covers installation, daily use, analysis, history, reports, backups and examples for individual sensors.

!	Sample data All screenshots and values are demonstration data. Device names, entity IDs, serial numbers, calibration values and GMCMap IDs must be adapted to your own installation.
!	Important safety information The add-on is intended for monitoring and home automation. It is not a calibrated radiation-protection instrument and does not replace official measurements, professional advice or instructions from authorities.

How to use this manual

- New installation: read chapters 1 to 4 first.
- Daily use: chapters 4 to 9 explain the dashboard.
- Unusual values or errors: use chapters 2 and 12.
- Administration: chapters 8 to 11 cover automation, exports, backups and integrations.

Contents

Home Assistant add-on - Version 8.3.2

Contents	Page
1. Quick start	4
2. Safety and measurement basics	5
3. Installation and first start	6
4. Dashboard overview	7
5. Views and devices	8
6. Intelligent evaluation and analysis	9
7. History and event notes	10
8. Workflows and notifications	11
9. Reports, exports and backups	12
10. Configuration examples	13
11. GMCMap, Home Assistant and MQTT	14
12. Troubleshooting, glossary and checklist	15

1. Quick start

Use these steps to reach a clear first dashboard without changing advanced settings.

- 1. Connect the compatible GMC counter to the Home Assistant host by USB.
- 2. Install and start the add-on. Open the web interface.
- 3. Confirm that the device is online and that the latest CPM value updates.
- 4. Select Summary first. Change to Analysis only when you need more detail.
- 5. Let the system collect measurements before judging trends or the local baseline.

!

Tip

A new installation needs time to learn the normal local background. Short-term fluctuations are normal.

2. Safety and measurement basics

CPM means counts per minute. The value depends on the detector tube, device model and environment. Compare a device mainly with its own history and configured safety limits.

- Absolute safety limits and the local background analysis answer different questions.
- A green local-background card does not override an absolute warning.
- A single spike should be checked, but a sustained rise is more important.
- Keep distance from an unknown source and follow local emergency guidance when a real hazard is suspected.

!

Important safety information

Never copy calibration factors or warning limits from an example without checking the device documentation and your intended use.

3. Installation and first start

The add-on automatically detects supported serial devices. Stable device paths are preferred so that reconnection works after a restart.

1. Install the add-on package and review the example configuration.
2. Adapt device names, sensor entity IDs and optional GMCMap settings.
3. Start the add-on and check the log for device discovery.
4. Open the dashboard and verify the status overview.
5. Create a managed backup before larger configuration changes.



Info

If no device appears, check the USB cable, power supply, host permissions and whether another process is using the serial port.

4. Dashboard overview

The upper area gives the fastest overview. It contains the location, resource links, view selector, status summary and navigation.


The screenshot shows the 'GMC Radiation Monitoring' dashboard. At the top, there's a 'Home Assistant location' section with a red location pin icon and the text 'Location unavailable'. Below this are two links: 'Geiger Counter World Map' with a globe icon and 'User manual' with a PDF icon, both labeled 'gmcmmap.com' and 'PDF - Version 8.0.8 - English' respectively. A 'View' section allows switching between 'Summary' (selected), 'Analysis', and 'Expert view'. Below this is a status summary grid with six items: 'Devices' (All 2 known GMC devices are connected), 'Latest accepted value: 19 CPM' (2026-07-17 11:04:03 CEST), 'Last successful storage' (2026-07-17 11:04:03 CEST), 'Discarded CPM peaks: 0' (Unconfirmed values since bridge start), 'Stored samples: 2,688' (Stored samples across all devices), and 'Database: ok' (0.51 MiB). A navigation bar at the bottom includes links for 'Devices', 'Intelligence', 'Analysis', 'History', 'Workflows', and 'Reports', along with an 'Expand all' button. The main section, 'Connected GMC devices', shows two device cards. The first card is for 'GMC-320 Re 4.22' (GMC320-DEMO), which is 'Online' and shows a 'Latest measurement' of '19 CPM'. It also indicates 'No active device warnings' and lists 'SERIAL: GMC320-DEMO', 'SERIAL PORT: -', 'BAUD RATE: -', and 'MEASUREMENT INTERVAL: 60 s'. The second card is for 'GMC-500+ Re 2.53' (GMC500-DEMO), also 'Online' with a 'Latest measurement' of '25 CPM', 'No active device warnings', 'SERIAL: GMC500-DEMO', 'SERIAL PORT: -', 'BAUD RATE: -', and 'MEASUREMENT INTERVAL: 60 s'. A yellow button labeled 'Sample data for this manual' is located at the bottom right of the device cards.

4. Dashboard overview

- The World Map link opens GMCMMap. The manual link opens the language that matches the dashboard.
- Summary, Analysis and Expert view control how much detail and how many tools are shown.
- The status summary shows connectivity, the latest accepted value, storage status and database health.
- Navigation jumps directly to devices, analysis, history, workflows and reports.

5. Views and devices

Every device has its own card. The card shows availability, the latest value, warnings, identity, serial connection and device-specific options.

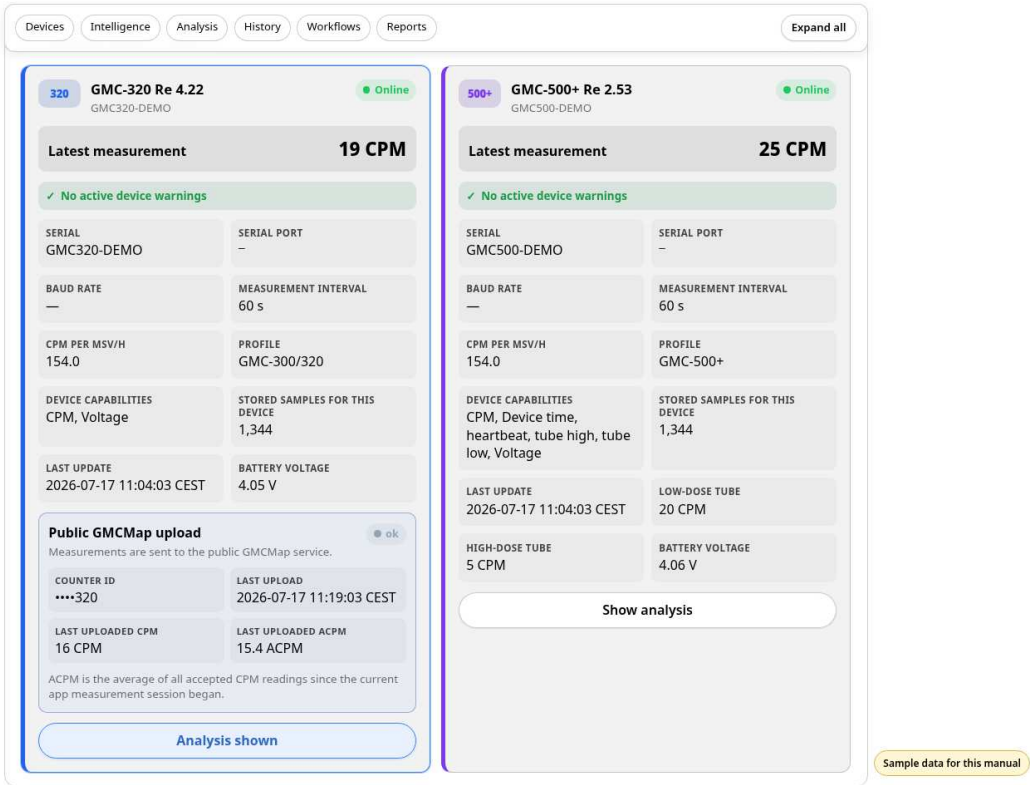

5. Views and devices


- Use clear device names that describe the room or purpose.
- Check the online state before interpreting a missing or old measurement.
- Device warnings are more important than decorative status colors.
- Expand technical details only when diagnosing a connection or configuration issue.

Tip

The selected view is stored in the browser. Different computers can therefore use different detail levels.

6. Intelligent evaluation and analysis

The analysis combines absolute limits, local background, trends, data quality and optional environmental information. It is designed to explain why a value is considered normal or unusual.

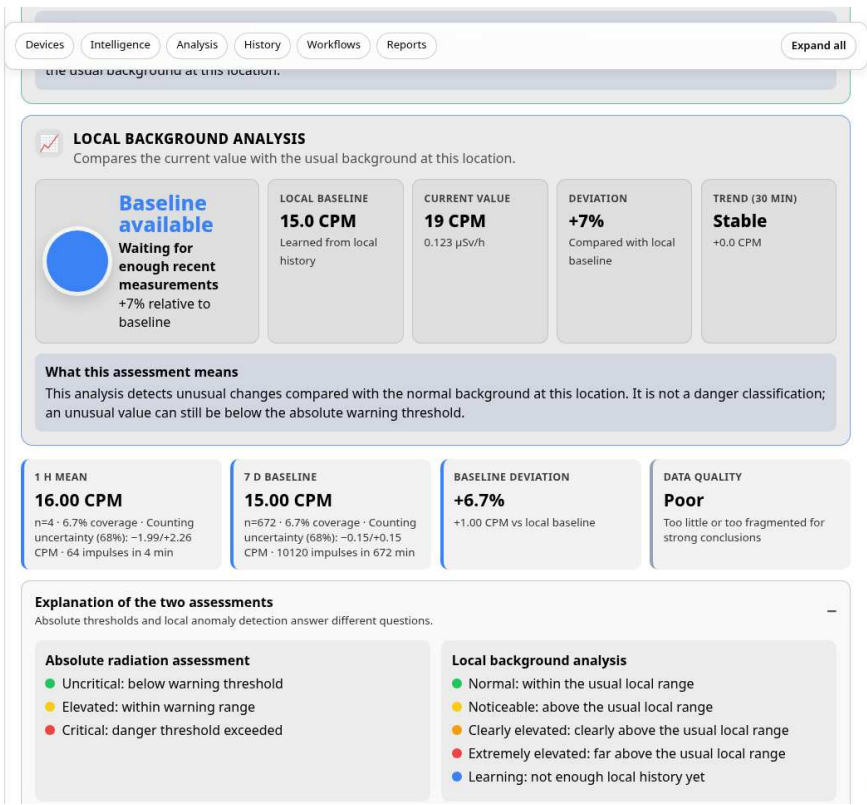

6. Intelligent evaluation and analysis

- Summary gives the recommended everyday view.
- Analysis adds reasoning, trend cards and background comparisons.
- Expert view reveals raw diagnostics, quality information and additional exports.
- Read the recommendation together with the underlying cards; do not rely on one number alone.

Info

“Unremarkable” means that the value fits the learned local pattern. It is not a general declaration that radiation is harmless.

7. History and event notes

History shows changes over time. Event notes help explain ventilation, maintenance, moved devices or other circumstances that can affect the data.

DevicesIntelligenceAnalysisHistoryWorkflowsReportsExpand all

Event notes

Document ventilation, movement, maintenance or an unknown cause

Start

mm/dd/yyyy, --:-- --

End

mm/dd/yyyy, --:-- --

Category

Window opened

Status

Note

Note

Add event note

No annotations have been added yet.

History explorer

Accepted CPM values with event markers in a freely selected period

History from

07/16/2026

History to

07/17/2026

Show rejected raw values

Show period

Minimum: 11.0 CPMMaximum: 19.0 CPM

Sample data for this manual

7. History and event notes

- 1. Choose the device and time range.
- 2. Compare the graph with the learned baseline and event notes.
- 3. Add a note when you move a device, change a cable or alter the room conditions.
- 4. Use period comparison to distinguish a lasting change from a short event.

!

Tip

Good event notes make later analysis much easier. Use short factual descriptions and exact times.

GMC Radiation Monitor | 8.3.2 | English

Page 10

8. Workflows and notifications

Workflows automate routine tasks without changing the measurement process. Available options include notifications, scheduled reports and period comparisons.

The screenshot shows the 'Workflows' tab in the settings menu. It includes sections for 'Workflow settings', 'Compare periods', and 'System self-test'.

Workflow settings:

- Checkboxes: ☒ Notify about database integrity problems, ☒ Enable scheduled reports, ☐ Daily ZIP reports, ☒ Weekly ZIP reports, ☒ Monthly JSON summaries.
- Report hour: 6
- Managed backups to retain: 7
- Buttons: Save workflow settings

Compare periods:

Compare two freely selected date ranges

Device: Basement GMC-320R

First period from: 07/04/2026, First period to: 07/10/2026, Second period from: 07/11/2026, Second period to: 07/17/2026

Compare

First period mean	Second period mean	Mean difference	Median difference	Statistical indication
15.30 CPM 672 samples · 6.7% coverage	15.00 CPM 621 samples · 6.2% coverage	-0.29 CPM -1.90 %	0.00 CPM	-3.33 Difference divided by the combined standard error

The comparison is only indicative because data coverage is low

System self-test:

Additional diagnostics not shown in the status overview

- Database schema:** Schema version 8 of 8
- Home Assistant API:** Home Assistant API is currently unavailable
- Timezone:** Timezone Europe/Berlin is valid
- Free storage:** 8796093021636 MiB are available
- Translations:** All translations are up to date
- App configuration:** The entire file is ok
- Managed backups:** The selected backup is ok

Sample data for this manual

8. Workflows and notifications

- Enable only notifications that someone will actually receive and act on.
- Test the offline threshold by disconnecting a non-critical test device.
- Choose a scheduled report time when Home Assistant is normally running.
- Collapsed sections remember their state in the browser.


!

Important safety information

Automation is an aid. It does not guarantee delivery and must not be the only safety measure.

9. Reports, exports and backups

Reports provide understandable summaries and technical exports. Managed backups protect the application database and settings used by the add-on.

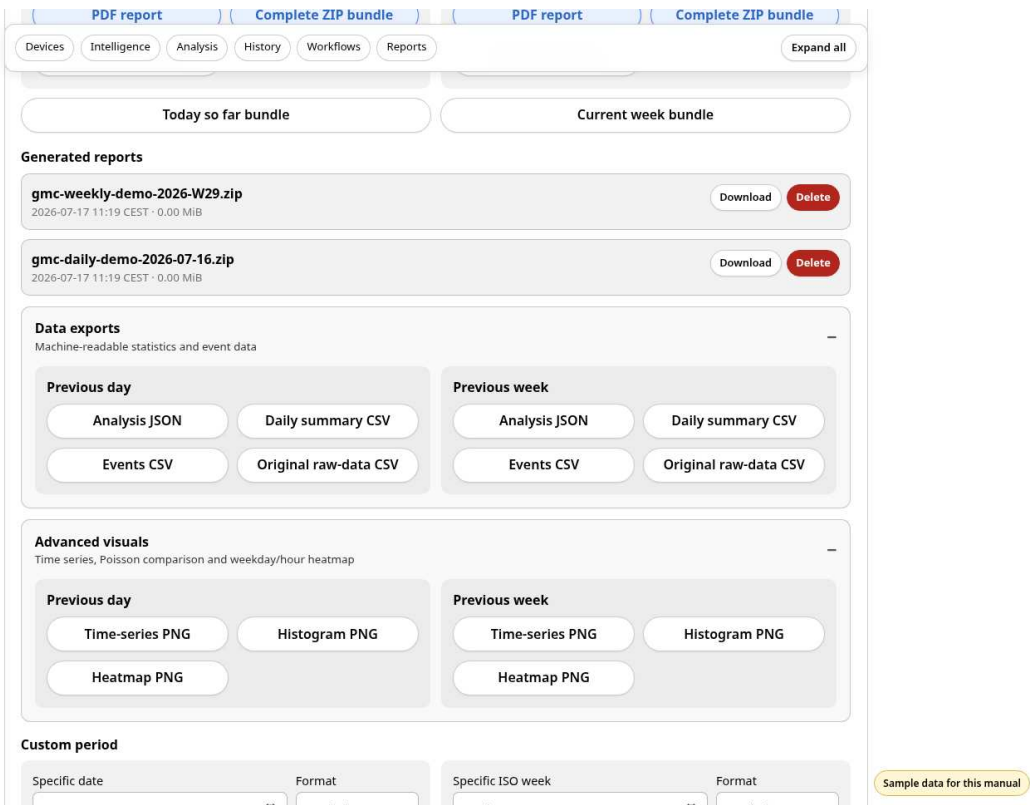

9. Reports, exports and backups

- Use “Measurements as CSV” for quality-filtered values.
- Use “Original raw data as CSV” only when you need expert-level diagnostics.
- ZIP reports bundle multiple files for archiving or sharing.
- Delete generated reports only after confirming that no copy is still required.
- Create a managed backup before upgrades or major option changes.

!

Info

A backup is useful only when it can be found and restored. Document the storage location and retention policy.

10. Configuration examples

The included configuration is intentionally an example for individual sensors. Replace the example entities and device-specific values with those from your own Home Assistant installation.

```
devices:
  - name: "Basement counter"
    serial_number: "YOUR-SERIAL"
    external_temperature_entity: "sensor.basement_temperature"

system:
  ui_language: "auto"
  timezone: "Europe/Berlin"
```

- Use valid Home Assistant entity IDs.
- Keep serial numbers unique.
- Treat calibration values as device-specific data, not universal defaults.
- Restart the add-on after configuration changes that affect device discovery.

!

Sample data

All screenshots and values are demonstration data. Device names, entity IDs, serial numbers, calibration values and GMCMap IDs must be adapted to your own installation.


11. GMCTMap, Home Assistant and MQTT

GMCTMap publishing, MQTT entities and Home Assistant sensors are optional integrations. Configure them only when you understand where the data is sent and how it is used.

- GMCTMap can publish selected measurements to the public world map. Check privacy and location settings first.
- MQTT entities expose current values, availability and analysis results to Home Assistant.
- Use Home Assistant automations for convenience, but keep the add-on's own status and reports available for diagnosis.
- Protect API keys and counter identifiers; do not place secrets in screenshots or public issue reports.

!

Tip
Start with local monitoring. Add external publishing only after the local installation is stable.

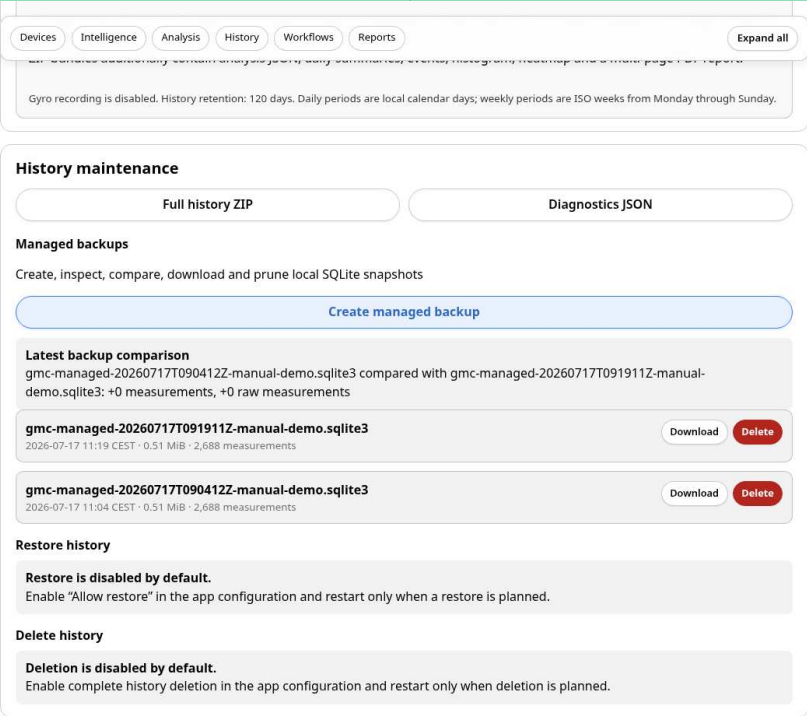

Sample data for this manual

11. GMCTMap, Home Assistant and MQTT

12. Troubleshooting, glossary and checklist

Most problems can be narrowed down by checking the status overview, device card, log and self-test in that order.

Problem	Action
No device	Check USB, power, permissions and serial-port conflicts.
Old value	Check online state, scan interval and recent log messages.
Unexpected spike	Compare with history, event notes and data-quality information.
No report	Check workflow settings, time zone, storage and free space.
Manual missing	Reinstall the complete 8.3.2 package and refresh the dashboard.

Glossary

Term	Meaning
CPM	Counts per minute reported by the detector.
Baseline	Learned normal range for this device and location.
Trend	Direction of recent measurements over a selected period.
Raw data	Unfiltered records kept for technical analysis.
Managed backup	Application-created backup with retention management.

Final check

- ☐ Device online and value current
- ☐ No active device warning
- ☐ Database status OK
- ☐ Time zone correct
- ☐ Backup current
- ☐ Notification path tested

Version 8.3.4 addendum

This version extends the device view and metrology configuration for detectors with one or two Geiger-Mueller tubes.

Detector and calibration on the main dashboard

- The device card now shows the tube model, conversion factor and calibration status directly.
- Analysis and expert views additionally show dead time, correction model, reliable CPM limit, uncertainty values and calibration reference.

GMC-500+ dual-tube profiles

- M4011 and SI-3BG can use separate conversion factors, dead times and reliable count-rate ranges.
- Separate mode uses the two tube channels. Curve mode applies a piecewise dual-tube calibration curve.
- When the SI-3BG calibration is missing, the app does not calculate a misleading dose value with the M4011 factor.

Note: Bundled default values are working values and do not replace a traceable calibration certificate.

Addendum for version 8.3.5

This edition supplements the existing user manual with the changes introduced in version 8.3.5.

Detector presets and unambiguous tube configuration

- GMC-320 Plus V4: one physical M4011 tube. The app automatically loads 154 CPM/(μ Sv/h), 120 μ s dead time, the non-paralyzable model, a 50,000 CPM working limit and 20% factor uncertainty.
- GMC-500+: separate profiles for the primary M4011 tube and the second SI-3BG tube. No dose factor is invented for the SI-3BG without verified device calibration.
- Duplicated low_dose_* fields were removed from the Home Assistant configuration. The normal calibration fields now describe the only or primary tube.
- The dashboard shows one detector profile for single-tube devices and two separate profiles for dual-tube devices.
- Existing version 8.3.4 configurations are migrated automatically and remain backward compatible.

Note: The predefined values are documented application working values and do not replace a traceable calibration certificate.

Version 8.4.1 addendum

GMC Radiation Monitor 8.4.1

Detector, calibration and scientific traceability

- Automatic profile detection for GMC-300, GMC-320, GMC-500+ and GMC-600+.
- New expert card with tube, calibration status, dead time and active detector.
- Live measurement quality, detector load, estimated losses and correction factor.
- GMC-500+: separate M4011 and SI-3BG display; no invented SI-3BG dose factor.
- Calibration profiles, assistant and versioned calibration history.
- Raw, dead-time-corrected and comparison modes for charts and reports.
- Optional scientific PDF report with an additional metrology page.

Note: predefined working values do not replace a traceable calibration certificate.

Addendum for version 8.4.4

Interface and device configuration

Version 8.4.4 removes the duplicate measurement-quality and device-comparison tiles. The detector profile now contains only supplementary information; raw values, dead-time correction and the quality index remain traceable in Expert view.

The GMC-320 is configured only as a single-tube device. The GMC-500+ has exactly one complete dual-tube entry for M4011 and SI-3BG. Existing split 8.4.0/8.4.1 entries are merged losslessly at startup.

Single tube GMC-300 / GMC-320	Dual tube GMC-500+ (M4011 + SI-3BG)
----------------------------------	--

Improved device card and measurement display

- The Connected GMC devices card now presents device identity, connection state and the latest measurement in a clear order.
- The primary value is shown as a large number with a smaller unit; CPM, active detector and measurement quality remain compact below it.
- Main-value size can be Small, Medium, Large or Custom.
- Custom accepts 20 to 64 pixels. The setting is available in add-on options and directly in the dashboard.
- The age of the latest accepted measurement is shown beside the online/offline status.
- All technical diagnostics remain available in Expert view.

Version 8.4.8 addendum

Watchdog health and always-visible measurement details

- The /health endpoint now checks service status, database integrity, schema, configuration, device connections, measurement freshness and free storage.
- Healthy and warning states return HTTP 200. Only critical errors return HTTP 503 and can trigger the Home Assistant watchdog.
- One shared configuration validator is used at startup, in self-tests, health checks, the dashboard and after option migrations.
- At the app-wide Expert level, Measurement details are always visible. The duplicate Expert view title and plus/minus control are removed.
- Raw CPM, corrected CPM, dead-time loss, correction factor and measurement quality remain visible in a responsive grid.
- Database schema 8 and all measurement, detector and metrology algorithms remain unchanged.

Version 8.4.9 addendum

Bridge heartbeat and configurable health limits

Version 8.4.9 improves service observability without changing the database schema or measurement algorithms.

- The acquisition service writes an atomic bridge heartbeat to `/data/gmc_bridge_heartbeat.json` every 15 seconds.
- The health check now separates bridge-process liveness from device connectivity and measurement freshness.
- Heartbeat state, process IDs, assigned devices and the last child exit status are included in diagnostics.
- Startup grace and bridge/measurement warning and error limits are configurable under System.
- Invalid ordering is rejected and unusually short limits produce a configuration warning.
- Warnings remain operational with HTTP 200; only critical errors return HTTP 503.

Defaults: heartbeat 15 s · startup grace 900 s · bridge 45/120 s · measurement age 600/1200 s

GMC Radiation Monitor 8.4.10

Report layout maintenance update

Analysis report spacing was corrected to prevent overlapping labels and panels.

Database schema and measurement algorithms remain unchanged.

Appendix: What changed in version 9.0.0

Version 9.0.0 renews scientific time handling, live updates, report creation and maintainability. Existing schema-8 databases remain compatible.

Time series and uncertainty

- Fast CPM polls are treated as overlapping rolling one-minute windows. Only sufficiently separated readings count as independent windows for Poisson uncertainty and significance.
- Period means and data coverage are time weighted and gap aware. Dense retries cannot compensate for long outages.
- GMCMAP ACPM is defined as a time-weighted rolling 60-minute value and no longer depends on service uptime.

Calibration and traceability

- Custom profiles can document instrument identity, firmware, calibration type, reference, laboratory, accreditation, certificate, validity, geometry, environmental conditions and SHA-256.
- These fields document the origin of a conversion; they do not turn the app into a certified dosimeter.

Operation and accessibility

- Live device cards use a compact JSON endpoint. Interrupted updates use visible status and exponential retry backoff.
- A unified report form previews sample count, time coverage and gaps before export.
- Keyboard support, help popovers, reduced motion, forced colours and mobile forms were improved.

Important: CPM remains the primary measurement. Derived $\mu\text{Sv/h}$ values depend on the selected detector profile and its calibration.