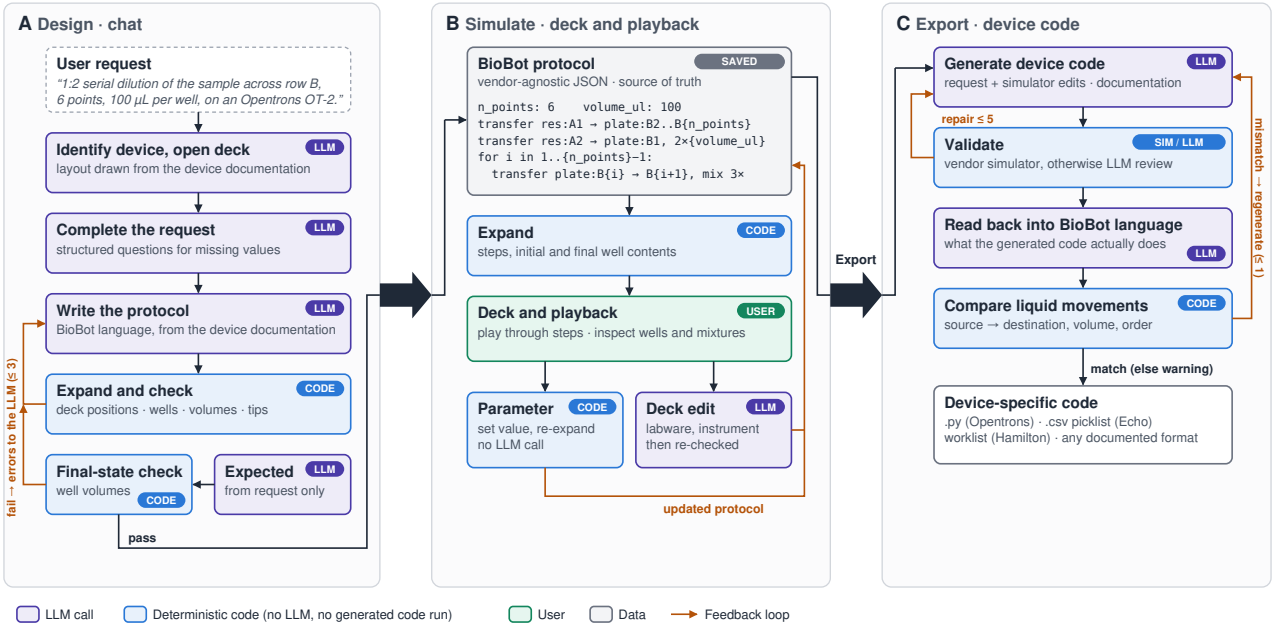


Device code is generated only at export. The simulator plays, and the system saves, the protocol — never code.