



Zero-Ohm Systems
Transforming the laws of sound

User Manual

4K-4 Disruptor



4000W
(per channel/4 channels)

4K₄
DISRUPTOR
SERIES

4K-4

4000W | Per channel
4 channels

SPECIFICATIONS

ZERO-OHM System is a passive device that interconnects between any amplifier and multiple loudspeakers without the concerns of amplifier speaker loads, impedance and extremely long cable runs.

This Patented Design **eliminates** the need for 70V-100V transformer products.

Multiple loudspeakers can be wired in a parallel connection to impedances below one (1) Ohm.



FEATURES

- Zero (0) Ohm functionality
- No Transformers required
- Multiple loudspeakers can be connected in parallel
- Any Speaker impedance can be used: 2/4/8/16 Ohm
- Uniform power distribution over long distance cable runs
- Full range frequency response
- Identical Output Phase relationship with all Power Amplifiers

4K-4**4000W** | Per channel
4 channels**ACOUSTIC PERFORMANCE**

Frequency Response	20Hz - 20kHz
Frequency Range	20Hz - 20kHz
Total Harmonic Distortion	Reference chart below

PHYSICAL PROPERTIES

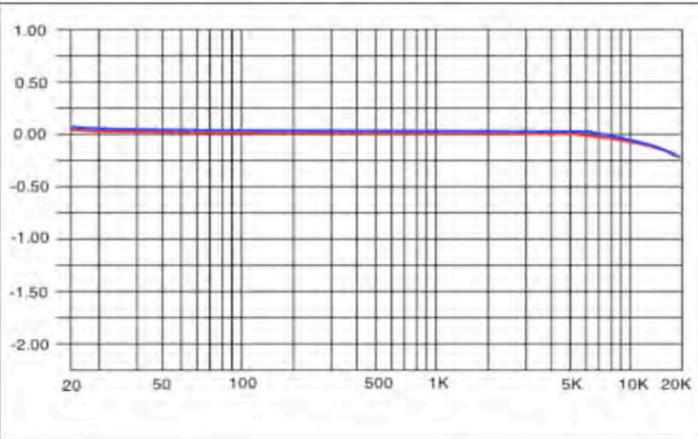
Height	65.1mm
Width	438.1 mm / 479.4mm with Rack Ears
Depth	149.2 mm
Weight	5 kg
Shipping Weight	5.5 kg (Including Packaging)

ORDER INFORMATION

**4K-4 Two Channel
Rackmount System** P/N: 4K-4

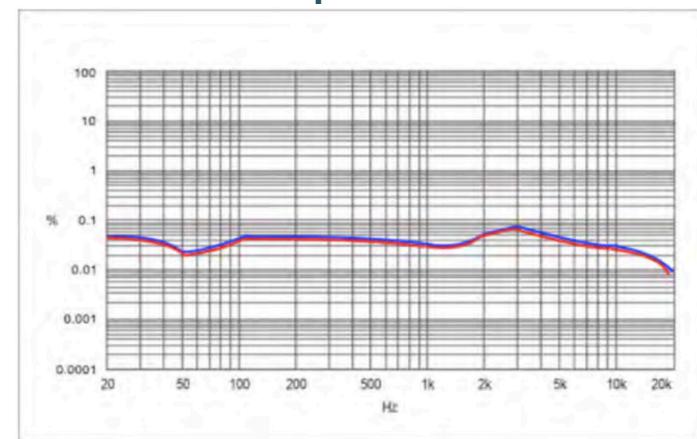
COUNTRY OF ORIGIN

Made in Canada

Frequency Response: 100W RMS at 8 Ohms**AUDIO**

Input/ Output Connector	Neutrik NL4
Input Pin- Out	(Ch 1) Input 1A: Pin 1+/1- (Ch 2) Input 2A: Pin 2+/2- (Ch 3) Input 1B: Pin 2+/2- (Ch 4) Input 2B: Pin 1+/1-
Output Pin- Out	(Ch 1) Output 1A: Pin 1+/1- (Ch 2) Output 2A: Pin 2+/2- (Ch 3) Output 1B: Pin 2+/2- (Ch 4) Output 2B: Pin 1+/1-
Min. Output Impedance	0.1 Ohms
Max. Power Handling	4000W (Per channel)

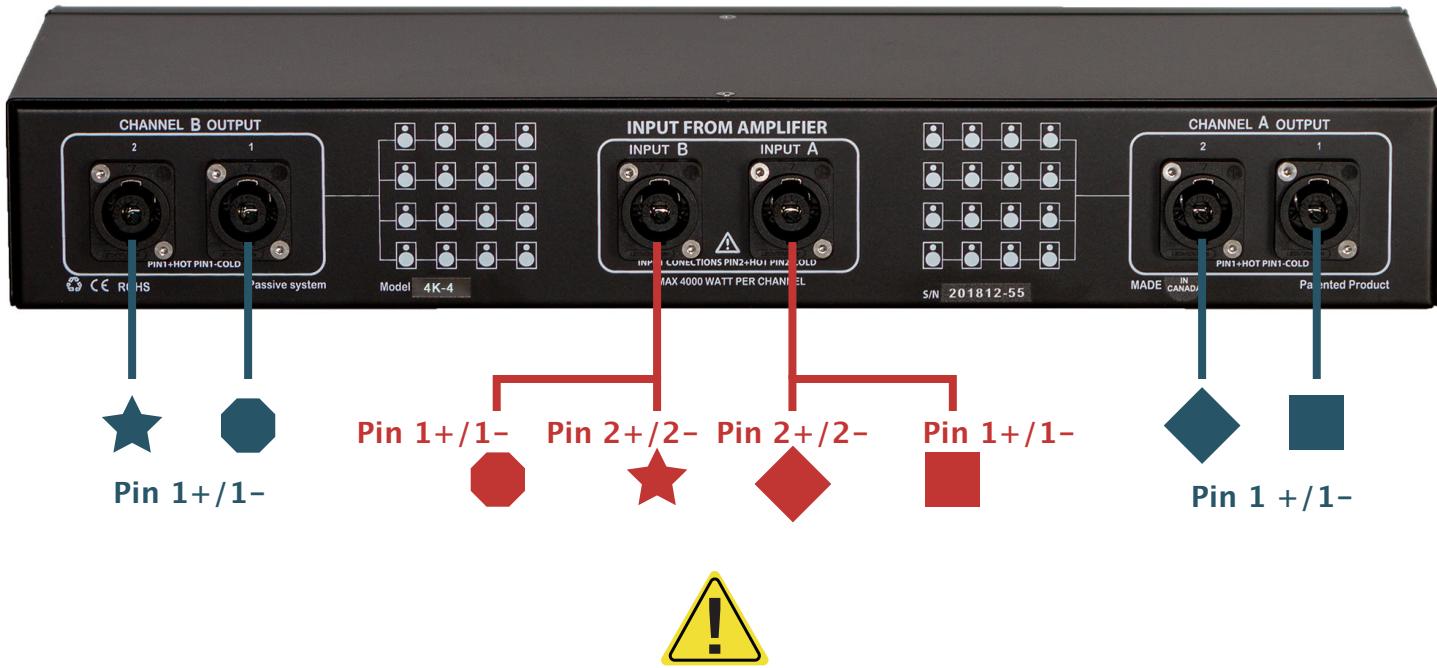
Since we are always striving to make our products better by incorporating new and improved materials, components and manufacturing methods, we reserve the right to change these specifications at any time without notice.

THD + N vs Frequency: 20W RMS at Complex Load

4K-4

**4000W | Per channel
4 channels**

BACK PANEL SPEAKON™ CONNECTORS



Never connect separate speaker lines using different amplifiers as the input.

ACOUSTIC PERFORMANCE

