


Single solenoid valve


with sub-base,
with manual override and mechanical
spring return:

Type MFH-5-3.3




with manual override and pneumatic
spring return:

Type MFH-5-3.3-L

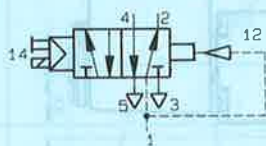

The valves with pneumatic spring have a
larger operating pressure range. Return
pressure = $\frac{1}{2} \times$ operating pressure.

Example: Type MFH-5-3.3

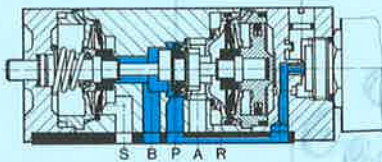

When the voltage supply is switched on, the solenoid is energized and the valve is actuated.

Accessories:

For sockets and accessories, see sheets 2.594 to 2.598.

Sub-bases see sheet 2.910.

10




- 1 (P) = Supply port
- 4, 2 (A, B) = Working or outlet lines
- 5, 3 (R, S) = Exhausts

Order code		with socket	6068 MFH-5-3.3	11 547 MFH-5-3.3-L
Part No./Type		without socket	+ voltage data	+ voltage data
Medium			<i>Example: 6068 MFH-5-3.3 + voltage data – OD</i>	
Design			Compressed air, filtered (lubricated or unlubricated)	
Mounting			Poppet valve, indirectly actuated in one-direction, with spring return	
Connection			On sub-base (see next page)	
Nominal size			As appropriate to the sub-base used	
Standard nominal flow rate (1 → 4)			3.3 mm	
Pressure range			3 to 8 bar	1.5 to 8 bar
Response time at 6 bar			On: 10 ms, Off: 22 ms	On: 14 ms, Off: 20 ms
Ambient temperature			– 5 to +40 °C	
Medium temperature			– 10 to +60 °C	
Materials			Housing: blue anodized aluminium; seals: Perbunan	
Weight			0.190 kg	
DC	Standard voltages		12, 24 V	} Solenoid coils, see sheet 2.591.1
	Special voltages		12 to 220 V	
AC	Standard voltages		24, 42, 110, 220 V/50 Hz or 50 and 60 Hz	
	Special voltages		12 to 240 V/50 or 60 Hz	
Power consumption	DC		4.5 W	
	AC		Hold: 6 VA, pull: 7.5 VA	
Duty cycle			100%	
Degree of protection			IP 65 (DIN 40050)	

5/2-way valves, indirectly actuated, barbed fittings for 4 mm tubing, G 1/8

Type MFH-5-3.3
MFH-5-3.3-L

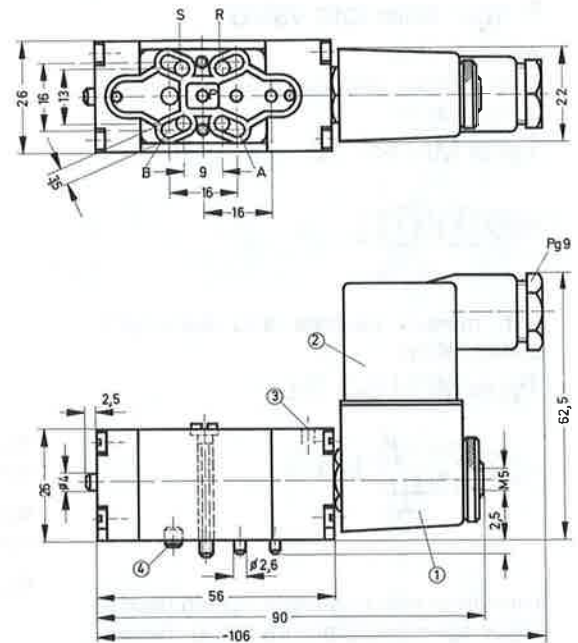

- 1 (P) = Supply port
4, 2 (A, B) = Working or outlet lines
5, 3 (R, S) = Exhausts

Permissible tightening torque for the securing nut of the solenoid coils = 150 Ncm (15 kpcm)

- ① Solenoid coil can be rotated
- ② Plug can be repositioned by 180°
- ③ Manual override
- ④ Locating pin

Wearing parts kit

For type	MFH-5-3.3	MFH-5-3.3-L
Order code	104 913	105 297

