

[Products](#)[My Account](#)[View Cart](#)[Distributors](#)[Contact Us](#)[Log In](#) or [Register](#)

Search for:

[Advanced Search](#)Your cart is  
emptyLanguage: [English](#) ▼Currency: [US Dollar](#) ▼

# 1.8" 128x160 TFT LCD with SPI Interface

Product 2/40

[prev](#)[listing](#)[next](#)**US \$5.00**[larger image](#)**FREE SHIPPING**  
TO ANYWHERE ON THE PLANET  
 ON ORDERS OVER \$100

- [Model: 1.8-LCD-Module](#)
- [Shipping Weight: 14g](#)
- [50 Units in Stock](#)

## Description


TFT LCD module has always been one of the hot products in DIY industry and LCD is basically the necessary products during all projects, at the same time, serial port modules are also the popular ones, because it takes few IO and the usage is simple. This section of the 1.8-inch TFT LCD serial SPI integrated features of compact, SPI interface.


## Feature

- It is a 1.8 "SPI TFT LCD Screen Module, 9pins interface. Not just a LCD break but include SD card (2GB),
- The LCD drive ic is ST7735S. It's a 128 X 160 (resolution). The LCD has a wide viewing angle, the contrast is also very suitable.
- The display interface is serial, it just needs 5 wires (CS, RS, SCL, SDA, RST) for controlling.
- SDcard use hardware SPI interface (CS / MOSI / MISO / SCK), Not solder pins.

## Parameter

- LED 3.3V IO and Power Supply pin
- LED UTFT Support
- SCL Serial clock input
- SDA/SDI Serial data input
- DC:Data/Command selection
- RST:Reset Low level active
- CS:Chip Selection, Low level active
- GND:Ground
- VDD33:3.3V Power Supply pin

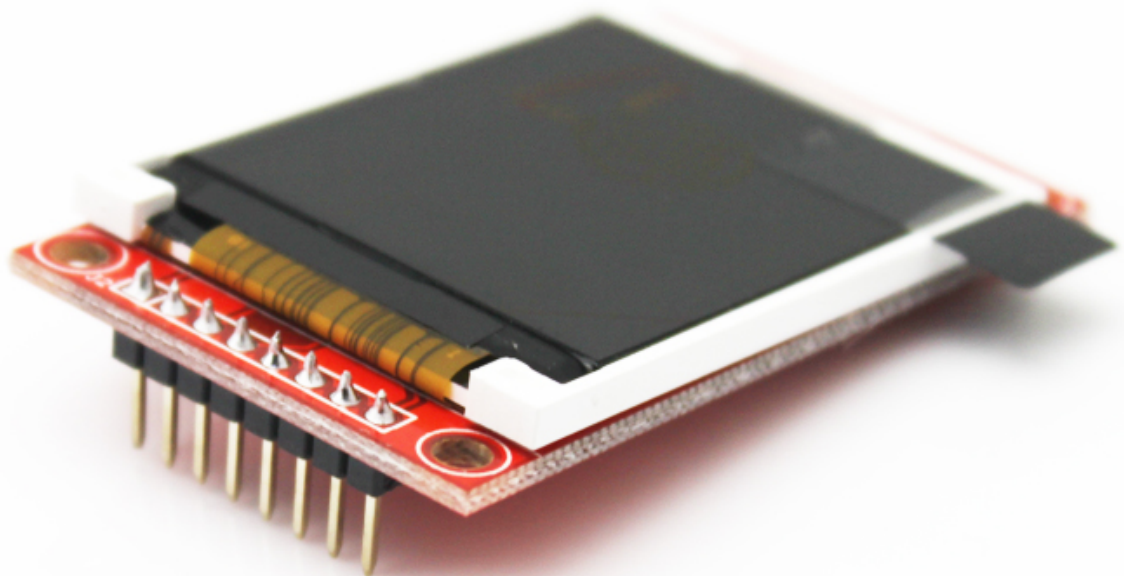

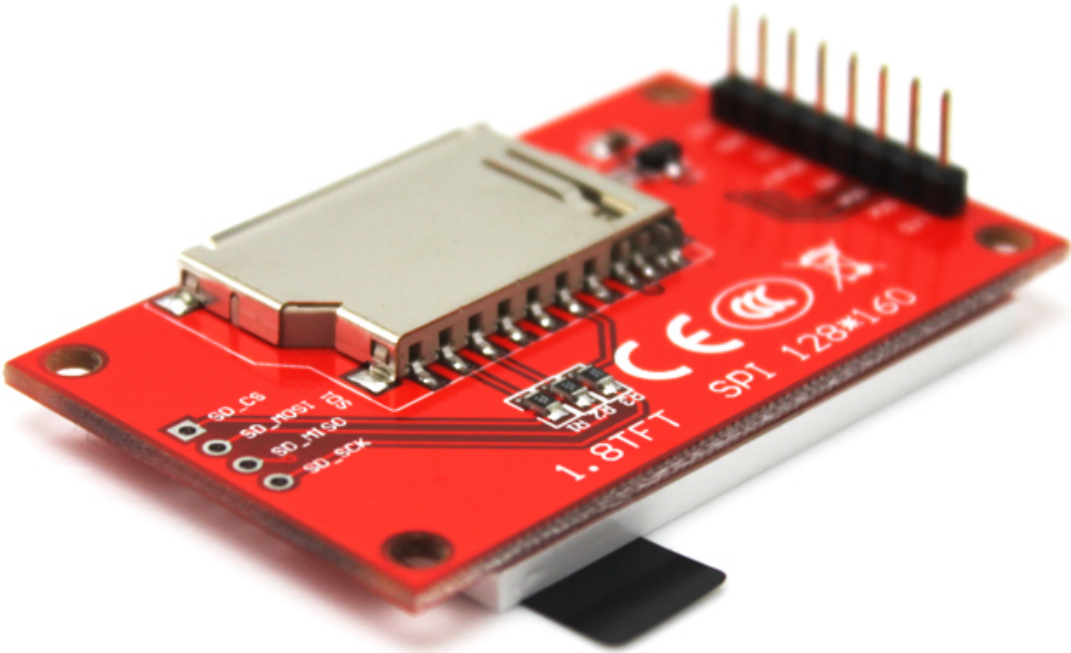

Document

- 1.8 TFT LCD (schematic & datasheet)

Add to Cart:

Add to cart >

Customers who bought this product also purchased...

 <div>Optical Smoke &amp; Dust Sensor GP2Y1010AU0F</div>	 <div>0.56" Four Digit Numeric Display Common Cathode</div>	 <div>PM2.5 Dust Sensor - DSM501A</div>
 <div>0.56" Four Digit Numeric Display Common Anode</div>	 <div>3 Axis Gyro-L3G4200D</div>	 <div>3 Axis Digital Accelerometer - ADXL345</div>

