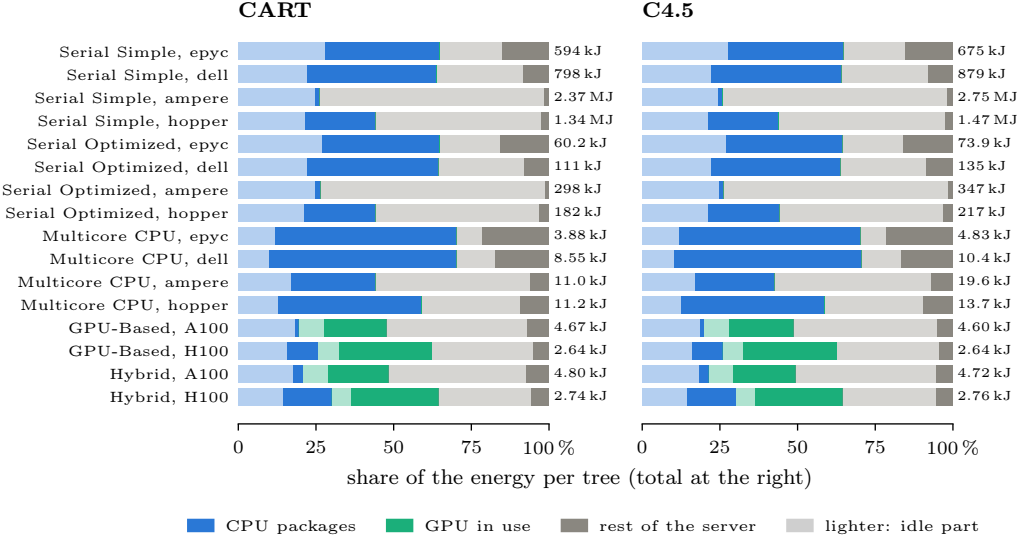

CART
C4.5
Serial Simple, epyc
Serial Simple, dell
Serial Simple, ampere
Serial Simple, hopper
Serial Optimized, epyc
Serial Optimized, dell
Serial Optimized, ampere
Serial Optimized, hopper
Multicore CPU, epyc
Multicore CPU, dell
Multicore CPU, ampere
Multicore CPU, hopper
GPU-Based, A100
GPU-Based, H100
Hybrid, A100
Hybrid, H100
594 kJ
798 kJ
2.37 MJ
1.34 MJ
60.2 kJ
111 kJ
298 kJ
182 kJ
3.88 kJ
8.55 kJ
11.0 kJ
11.2 kJ
4.67 kJ
2.64 kJ
4.80 kJ
2.74 kJ
675 kJ
879 kJ
2.75 MJ
1.47 MJ
73.9 kJ
135 kJ
347 kJ
217 kJ
4.83 kJ
10.4 kJ
19.6 kJ
13.7 kJ
4.60 kJ
2.64 kJ
4.72 kJ
2.76 kJ
0
25
50
75
100 %
share of the energy per tree (total at the right)
CPU packages
GPU in use
rest of the server
lighter: idle part