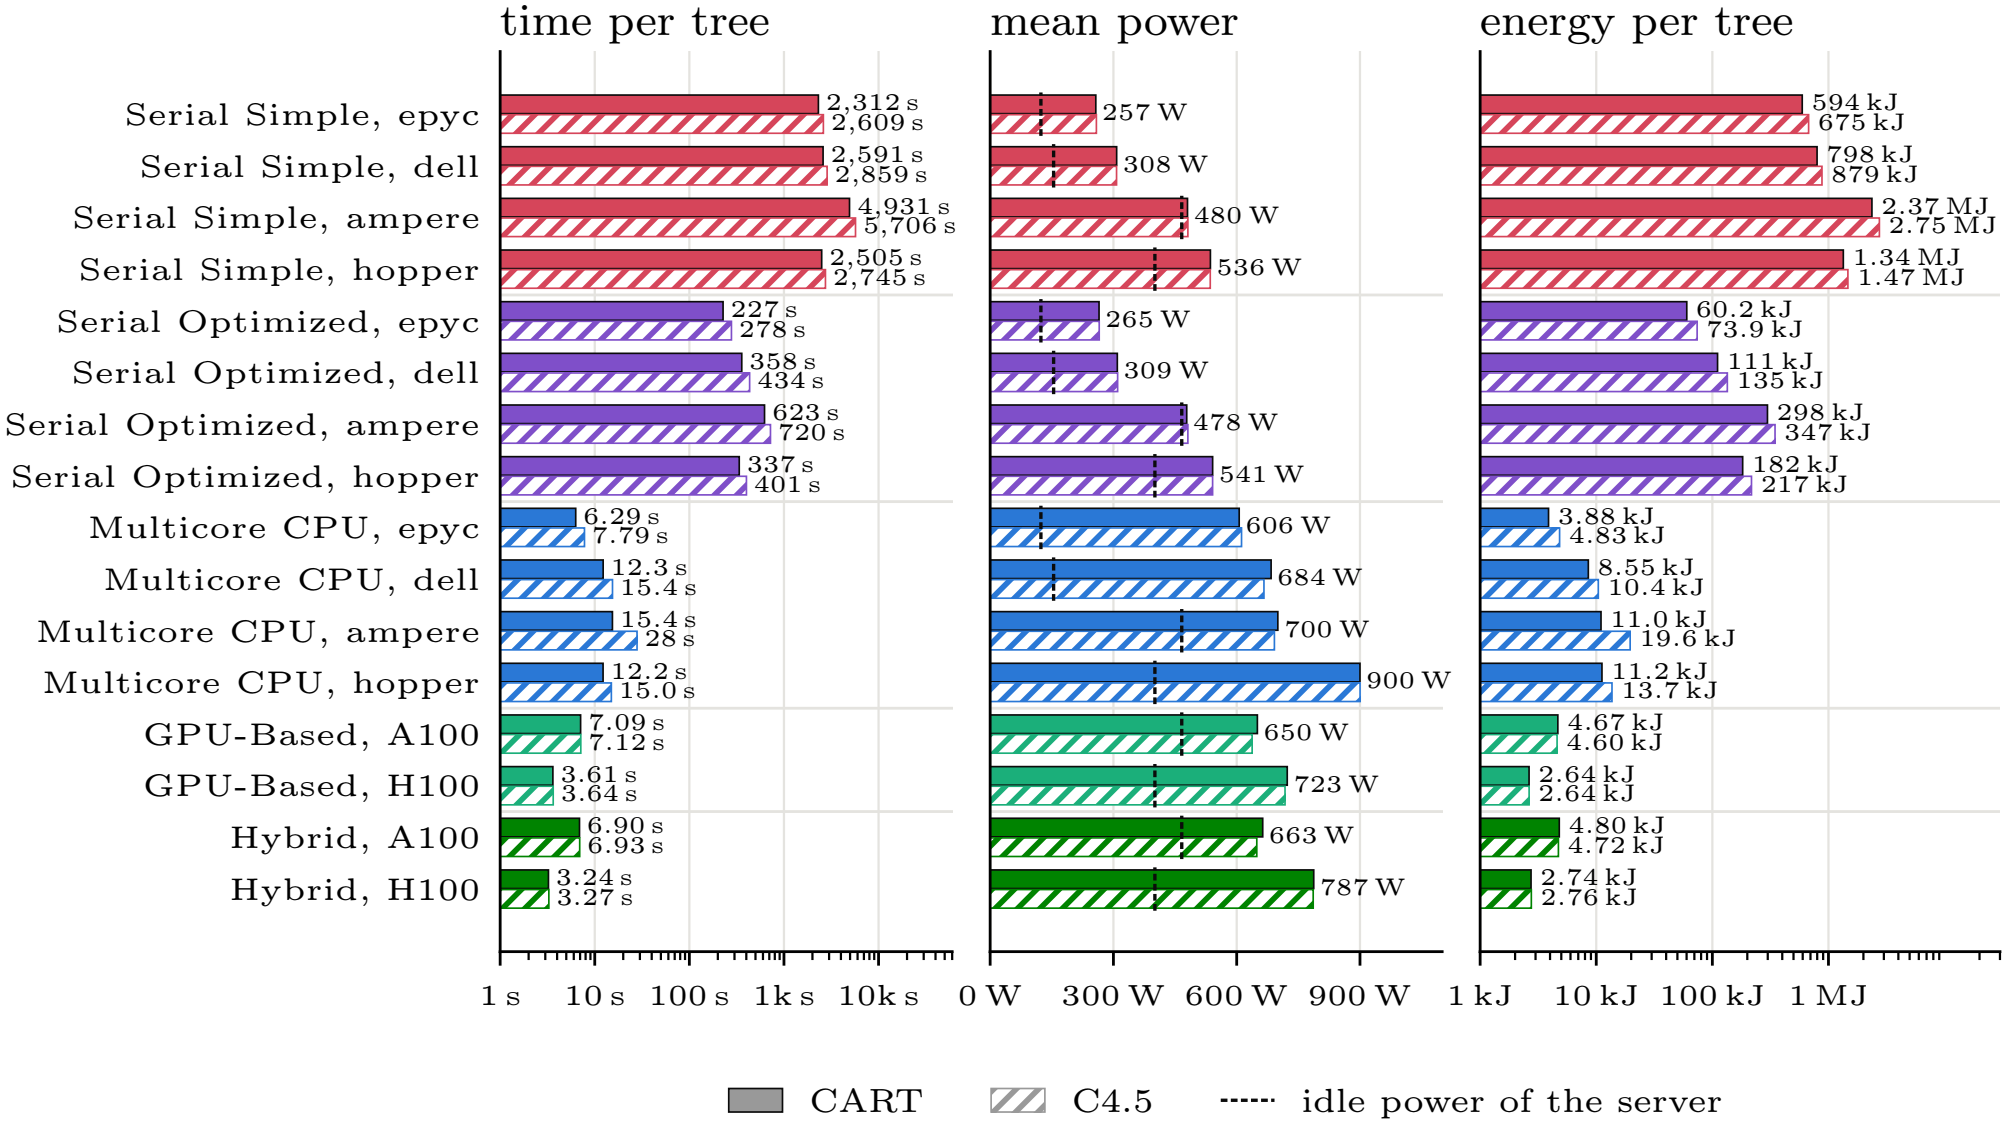

time per tree
mean power
energy per tree
Serial Simple, epyc
Serial Simple, dell
Serial Simple, ampere
Serial Simple, hopper
Serial Optimized, epyc
Serial Optimized, dell
Serial Optimized, ampere
Serial Optimized, hopper
Multicore CPU, epyc
Multicore CPU, dell
Multicore CPU, ampere
Multicore CPU, hopper
GPU-Based, A100
GPU-Based, H100
Hybrid, A100
Hybrid, H100
2,312 s
2,609 s
2,591 s
2,859 s
4,931 s
5,706 s
2,505 s
2,745 s
227 s
278 s
358 s
434 s
623 s
720 s
337 s
401 s
6.29 s
7.79 s
12.3 s
15.4 s
15.4 s
28 s
12.2 s
15.0 s
7.09 s
7.12 s
3.61 s
3.64 s
6.90 s
6.93 s
3.24 s
3.27 s
257 W
308 W
480 W
536 W
265 W
309 W
478 W
541 W
606 W
684 W
700 W
900 W
650 W
723 W
663 W
787 W
594 kJ
675 kJ
798 kJ
879 kJ
2.37 MJ
2.75 MJ
1.34 MJ
1.47 MJ
60.2 kJ
73.9 kJ
111 kJ
135 kJ
298 kJ
347 kJ
182 kJ
217 kJ
3.88 kJ
4.83 kJ
8.55 kJ
10.4 kJ
11.0 kJ
19.6 kJ
11.2 kJ
13.7 kJ
4.67 kJ
4.60 kJ
2.64 kJ
2.64 kJ
4.80 kJ
4.72 kJ
2.74 kJ
2.76 kJ
1 s
10 s
100 s
1k s
10k s
0 W
300 W
600 W
900 W
1 kJ
10 kJ
100 kJ
1 MJ
CART
C4.5
idle power of the server