

## uHeartMonitor: An ECG-based Heart Rate Monitor

Generated by Doxygen 1.9.8

<b>1 uHeartMonitor: An ECG-based Heart Rate Monitor</b>	<b>1</b>
1.1 Introduction	1
1.1.1 Background	1
1.1.2 Motivation	2
1.1.3 Disclaimer	2
1.1.4 Key Terms	2
1.2 Materials & Methods	3
1.2.1 Hardware Design	3
1.2.2 Software Architecture	5
1.3 Current Results	8
1.4 To-do	8
1.4.1 Hardware	8
1.4.2 Software	8
1.5 Build Instructions	8
1.5.1 Hardware	8
1.5.2 Software	8
1.6 References	9
<b>2 Topic Index</b>	<b>9</b>
2.1 Topics	9
<b>3 Data Structure Index</b>	<b>10</b>
3.1 Data Structures	10
<b>4 File Index</b>	<b>10</b>
4.1 File List	10
<b>5 Topic Documentation</b>	<b>12</b>
5.1 Application Software	12
5.1.1 Detailed Description	13
5.1.2 Data Acquisition (DAQ)	13
5.1.3 Liquid Crystal Display (LCD)	18
5.1.4 QRS Detector	43
5.1.5 Main	49
5.2 Common	58
5.2.1 Detailed Description	59
5.2.2 Function Documentation	59
5.2.3 FIFO Buffers	60
5.2.4 NewAssert	67
5.3 Middleware	67
5.3.1 Detailed Description	67
5.3.2 Debug	67
5.3.3 ILI9341	71
5.3.4 LED	83

5.4 Device Drivers	88
5.4.1 Detailed Description	89
5.4.2 Analog-to-Digital Conversion (ADC)	89
5.4.3 General-Purpose Input/Output (GPIO)	90
5.4.4 Phase-Locked Loop (PLL)	99
5.4.5 Serial Peripheral Interface (SPI)	100
5.4.6 Timer	105
5.4.7 Universal Asynchronous Receiver/Transmitter (UART)	114
5.4.8 Interrupt Service Routines	118
<b>6 Data Structure Documentation</b>	<b>122</b>
6.1 Fifo_t Struct Reference	122
6.2 GpioPort_t Struct Reference	123
6.3 Led_t Struct Reference	123
6.4 Spi_t Struct Reference	123
6.5 Timer_t Struct Reference	124
6.6 Uart_t Struct Reference	124
<b>7 File Documentation</b>	<b>124</b>
7.1 DAQ.c File Reference	124
7.2 DAQ.h File Reference	125
7.3 DAQ_lookup.c File Reference	125
7.4 Font.c File Reference	126
7.5 LCD.c File Reference	126
7.6 LCD.h File Reference	127
7.7 QRS.c File Reference	128
7.8 QRS.h File Reference	128
7.9 Fifo.c File Reference	129
7.10 Fifo.h File Reference	129
7.11 NewAssert.c File Reference	130
7.12 NewAssert.h File Reference	131
7.13 ADC.c File Reference	131
7.14 ADC.h File Reference	132
7.15 GPIO.c File Reference	132
7.16 GPIO.h File Reference	132
7.17 ISR.c File Reference	133
7.18 ISR.h File Reference	134
7.19 PLL.c File Reference	134
7.20 PLL.h File Reference	135
7.21 SPI.c File Reference	135
7.22 SPI.h File Reference	135
7.23 Timer.c File Reference	136
7.24 Timer.h File Reference	137

7.25 UART.c File Reference . . . . .	138
7.26 UART.h File Reference . . . . .	138
7.27 main.c File Reference . . . . .	139
7.28 Debug.c File Reference . . . . .	140
7.29 Debug.h File Reference . . . . .	140
7.30 ILI9341.c File Reference . . . . .	141
7.31 ILI9341.h File Reference . . . . .	142
7.32 Led.c File Reference . . . . .	143
7.33 Led.h File Reference . . . . .	143
<b>Index</b>	<b>145</b>

# 1 uHeartMonitor: An ECG-based Heart Rate Monitor

## 1.1 Introduction


### 1.1.1 Background

**Electrocardiography** (or **ECG**) is a diagnostic technique in which the electrical activity of a patient's heart is captured as time series data (AKA the ECG signal) and analyzed to assess cardiovascular health. Specifically, the ECG signal can be analyzed to detect biomarkers for cardiovascular diseases like arrhythmia, myocardial infarction, etc. which manifest as abnormalities in the ECG waveform. In clinical environments, ECG is performed using machines that implement the required hardware and software to acquire, process, and analyze the ECG signal. This must be done in such a way that preserves the important information within the signal (specifically the shape of the ECG waveform) while also maintaining the safety of the patient [1].

The ECG waveform consists of 5 smaller "waves" – the P, Q, R, S, and T waves – that each give information on a patient's cardiac health both individually and collectively. The term **QRS complex** refers to the part of the ECG waveform that is generally taken to be the heart "beat". Thus, ECG-based heart rate monitors commonly use a category of algorithms called **QRS detectors** to determine the locations of the R-peaks within a block of ECG signal data and calculate the time period between each adjacent peak (i.e. the **RR interval**) [2]. The RR interval is related to the heart rate by this equation:

$$RR = \frac{60}{HR}$$

...where  $RR$  is the time in  $[s]$  between two adjacent R peaks, and  $HR$  is the heart rate in  $[bpm]$  (beats per minute).

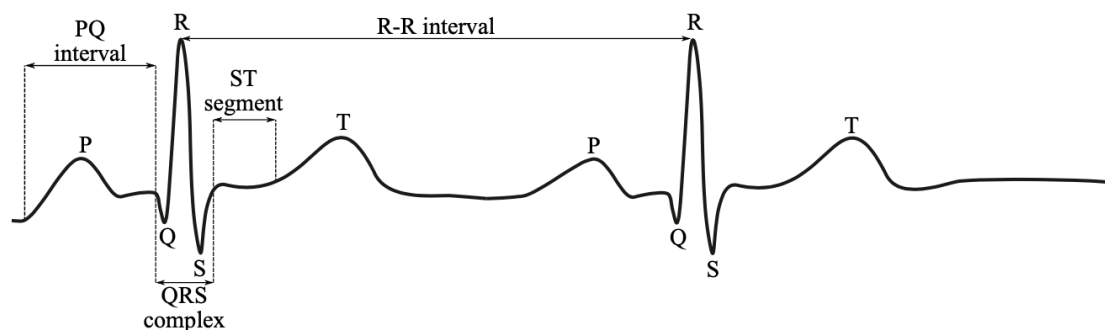

**Figure 3.** Sample ECG curve.

The uHeartMonitor is an embedded system that implements the Pan-Tompkins algorithm for QRS detection. The system consists of both hardware and software that cooperate to achieve this task while also visually outputting the ECG waveform and heart rate to a liquid crystal display (LCD). The text below and the contents of this repository reflect the current progress made, but the end goal is to have the full system mounted on 1-2 printed circuit boards (PCBs) situated inside an insulated enclosure.

### 1.1.2 Motivation

My primary motivations for doing this project are:

- Learning more about and gaining exposure to the many different concepts, tools, and challenges involved in embedded systems engineering
- Applying the skills and knowledge I gained from previous coursework, including but not limited to:
  - BIOE 4315: Bioinstrumentation
  - BIOE 4342: Biomedical Signal Processing
  - COSC 2306: Data Programming
  - [Embedded Systems - Shape the World](#)
- Showing tangible proof of qualification for junior-level embedded software engineering roles to potential employers

I also hope that anyone interested in any of the fields of knowledge relevant to this project (biomedical/electrical/computer/software engineering) will find this helpful to look at or even use in their own projects.

### 1.1.3 Disclaimer


This project is neither a product nor a medical device (by any legal definition, anyway), and is not intended to be either or both of things now or in the future. It is simply a passion project.

### 1.1.4 Key Terms

- Electrocardiogram/Electrocardiography (ECG)
- Heart rate
- Heart rate monitor
- QRS complex
- QRS detector
- RR interval


1.2 Materials & Methods

1.2.1 Hardware Design

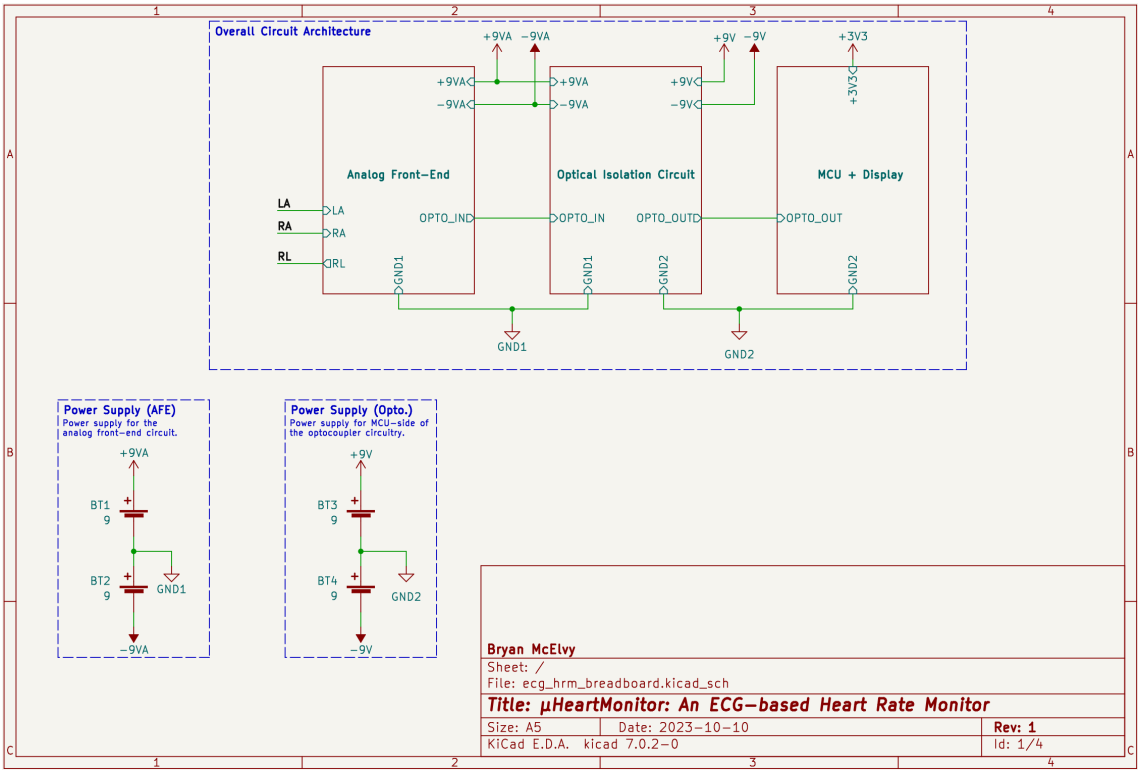


The hardware is divided into three modules: the analog-front end (AFE), the optical isolation circuit, and the micro-controller/display circuit.

## Analog-Front End

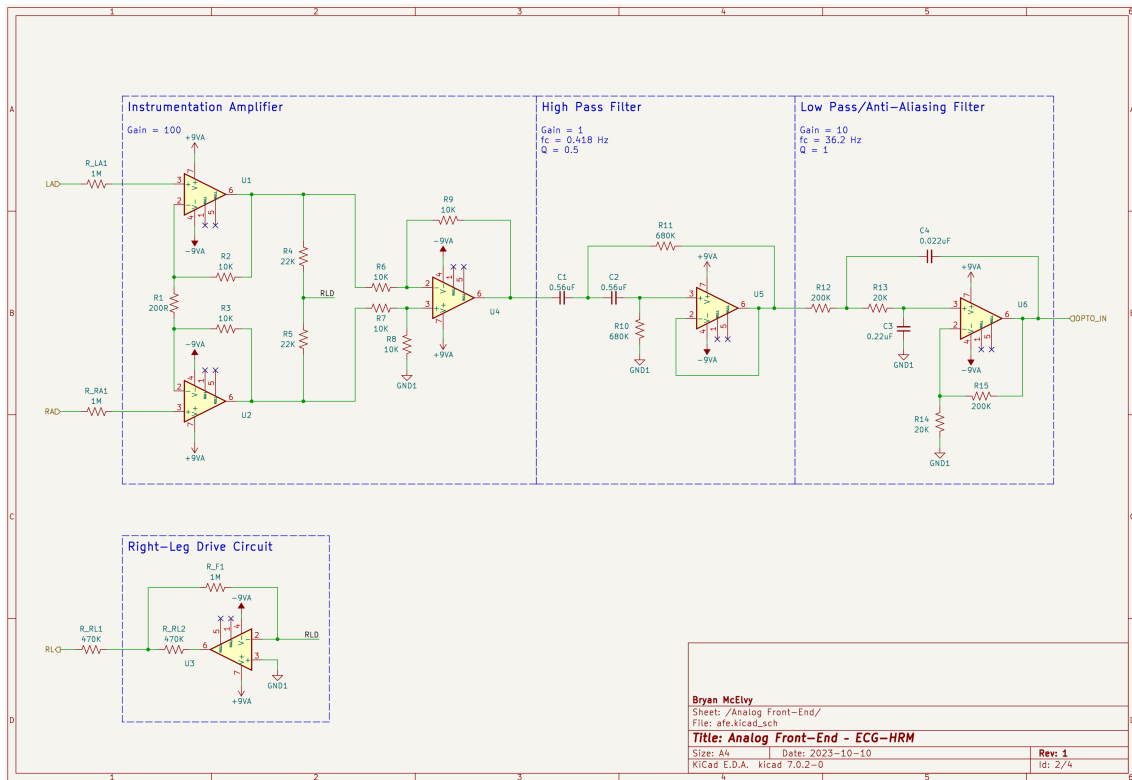

The AFE consists of an instrumentation amplifier with a gain of 100; a 2nd-order Sallen-Key high-pass filter with a gain of 1 and a cutoff frequency of  $\sim 0.5 \text{ Hz}$ ; and a 2nd-order Sallen-Key low-pass filter with a passband gain of 11 and a cutoff frequency of  $\sim 40 \text{ Hz}$ . The overall gain is 1100


## Optical Isolation Circuitry

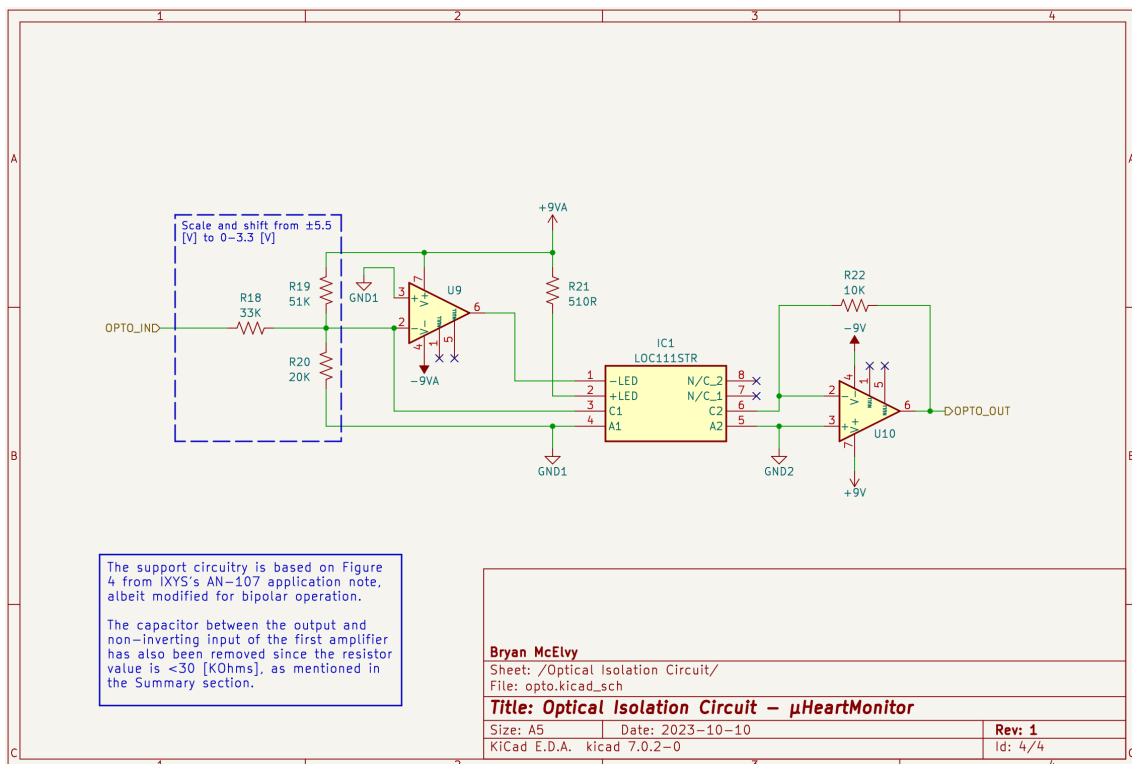

The optical isolation circuit uses a linear optocoupler to transmit the ECG signal from the analog-front end circuit to the microcontroller circuit. This circuitry serves as a safety measure against power surges and other potential hazards that can occur as a result of connecting someone directly to mains power (for example, death).

It also has three resistors on the AFE-side that effectively shift the signal from the projected output range of  $\pm 5.5\text{ V}$  to the range  $[0, 3.5)\text{ V}$ , which is necessary for both the optocoupler and the microcontroller's built-in analog-to-digital converter (ADC) circuitry.

### Microcontroller Circuit

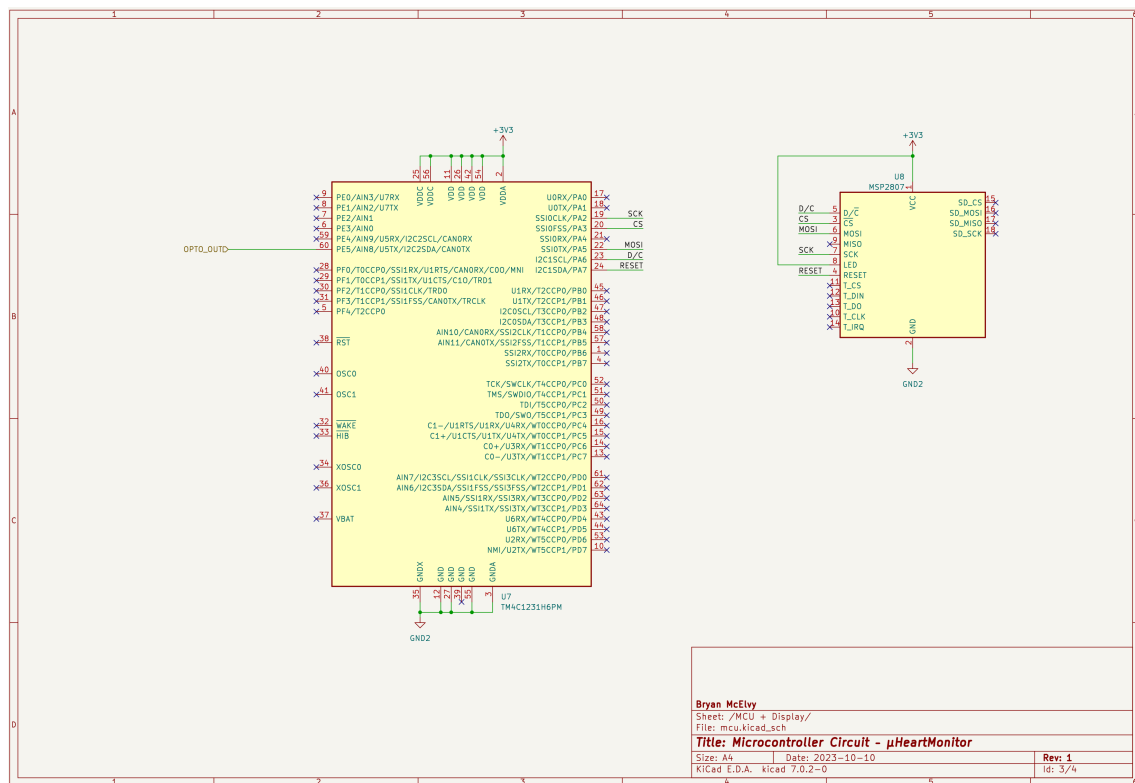


The microcontroller circuit currently consists of a TM4C123 microcontroller mounted on a LaunchPad evaluation kit, and an MSP2807 liquid crystal display (LCD).

### 1.2.2 Software Architecture


The software has a total of 14 modules, 11 of which are (somewhat loosely) divided into three layers: application-specific software, middleware, and device drivers. The call graph and data flow graph visually represent the software architecture.



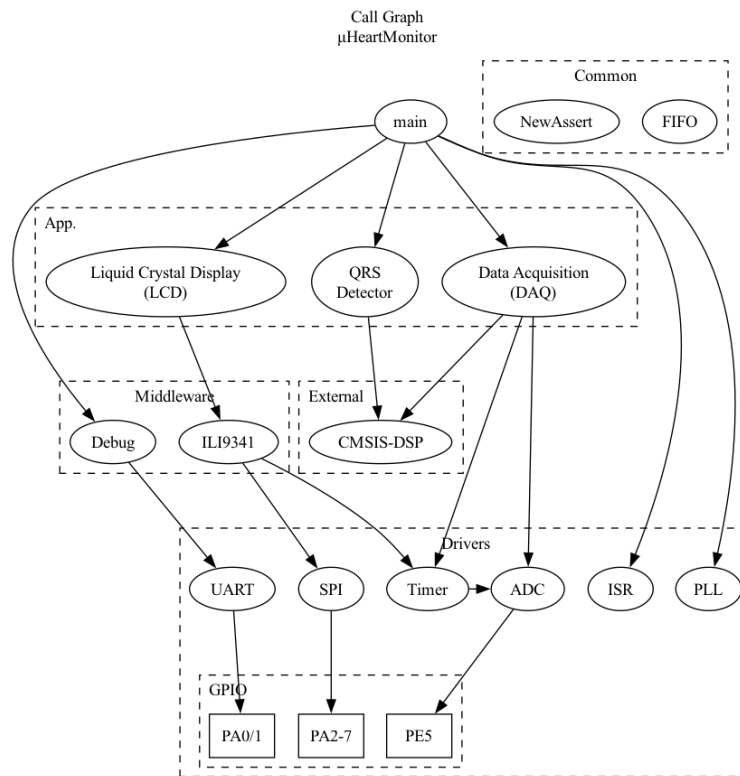

This graph shows which modules communicate with (or "call") each other. Each arrow points from the "caller" to the "callee".

It also somewhat doubles as an `#include` dependency graph.

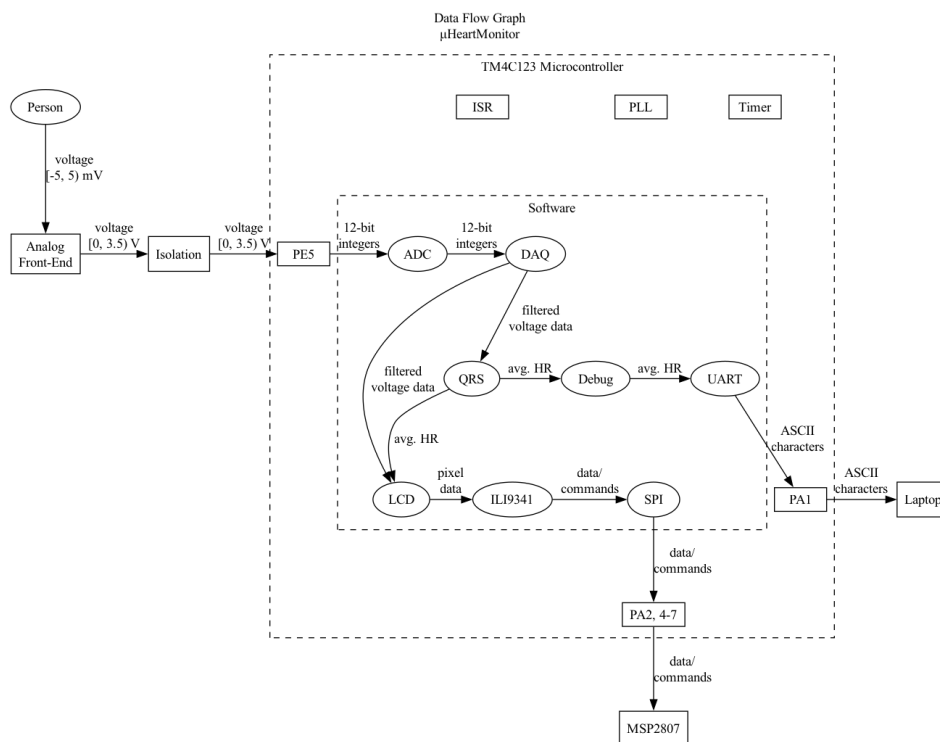

This graph shows the flow of information from the patient to the LCD (and also the laptop).

## Device Drivers

The device driver layer consists of software modules that interface directly with the microcontroller's built-in peripheral devices.

See also

[Device Drivers](#)

## Middleware

The middleware layer consists of higher-level device drivers that interface with some hardware connected to one of the built-in peripherals (i.e. the Debug module connects to UART and the ILI9341 module primarily uses SPI).

See also

[Middleware](#)

## Application Software

The application software layer has modules that are at least partially, if not completely built for this project. This layer includes the data acquisition module, whose functions handle receiving raw input samples and denoising them; the QRS detector, which analyzes the filtered signal to determine the average heart rate; and the LCD module, which plots the ECG waveform and displays the heart rate.

See also

[Application Software](#)

## External

This "layer" includes modules/libraries/files that were not written (or at least heavily altered) by me. It currently only contains portions of ARM's CMSIS-Core and CMSIS-DSP libraries.

## Common

The "common" modules are general-purpose modules that don't necessarily fit into the above categories/layers. This category includes the "Fifo" module, which contains a ring buffer-based implementation of the FIFO buffer (AKA "queue") data structure; and "NewAssert", which is essentially just an implementation of the `assert` macro that causes a breakpoint (and also doesn't use up as much RAM as the standard implementation does).

See also

[Common](#)

## 1.3 Current Results

Video Demonstration: [YouTube Link](#)

The project is currently implemented using 2 breadboards and a Tiva C LaunchPad development board. The manual tests I've been running use a clone of the JDS6600 signal generator, which I loaded a sample ECG waveform from the MIT-BIH arrhythmia database onto using scripts in the corresponding folder in the `/tools` directory. As can be seen in the video demonstration, the calculated heart rate isn't 100% correct at the moment, but still gets relatively close.

## 1.4 To-do

### 1.4.1 Hardware

- Design a custom PCB
  - Replace most of the AFE circuitry with an AFE IC (e.g. AD8232)
  - Add electrostatic discharge (ESD) protection
  - Add decoupling capacitors

### 1.4.2 Software

- Rework the structure of/relationship between the LCD and ILI9341 modules
- Refactor ADC module to be more general
- Refactor SPI module to be more general
- Remove statically-allocated data structures for unused Timers and GPIO ports
- Add remaining parts of the Pan-Tompkins algorithm
  - Thresholding procedure for bandpass-filtered signal (not just integrated signal)
  - Search-back procedure
  - T-wave discrimination
- Add heart rate variability (HRV) calculation
- Move CMSIS-DSP filters from DAQ and QRS modules to their own module
- Expand the automated test suite

## 1.5 Build Instructions

### 1.5.1 Hardware

WIP

### 1.5.2 Software

WIP

## 1.6 References

- [1] J. Pan and W. J. Tompkins, "A Real-Time QRS Detection Algorithm," IEEE Trans. Biomed. Eng., vol. BME-32, no. 3, pp. 230–236, Mar. 1985, doi: 10.1109/TBME.1985.325532.
- [2] R. Martinek et al., "Advanced Bioelectrical Signal Processing Methods: Past, Present and Future Approach—↔ Part I: Cardiac Signals," Sensors, vol. 21, no. 15, p. 5186, Jul. 2021, doi: 10.3390/s21155186.
- [3] C. Ünsalan, M. E. Yücel, and H. D. Gürhan, Digital Signal Processing using Arm Cortex-M based Microcontrollers: Theory and Practice. Cambridge: ARM Education Media, 2018.
- [4] B. B. Winter and J. G. Webster, "Driven-right-leg circuit design," IEEE Trans Biomed Eng, vol. 30, no. 1, pp. 62–66, Jan. 1983, doi: 10.1109/tbme.1983.325168.
- [5] J. Valvano, Embedded Systems: Introduction to ARM Cortex-M Microcontrollers, 5th edition. Jonathan Valvano, 2013.
- [6] S. W. Smith, The Scientist and Engineer's Guide to Digital Signal Processing, 2nd edition. San Diego, Calif: California technical Publishin, 1999.

## 2 Topic Index

### 2.1 Topics

Here is a list of all topics with brief descriptions:

<b>Application Software</b>	<b>12</b>
<b>Data Acquisition (DAQ)</b>	<b>13</b>
<b>Liquid Crystal Display (LCD)</b>	<b>18</b>
<b>QRS Detector</b>	<b>43</b>
<b>Main</b>	<b>49</b>
<b>Common</b>	<b>58</b>
<b>FIFO Buffers</b>	<b>60</b>
<b>NewAssert</b>	<b>67</b>
<b>Middleware</b>	<b>67</b>
<b>Debug</b>	<b>67</b>
<b>ILI9341</b>	<b>71</b>
<b>LED</b>	<b>83</b>
<b>Device Drivers</b>	<b>88</b>
<b>Analog-to-Digital Conversion (ADC)</b>	<b>89</b>
<b>General-Purpose Input/Output (GPIO)</b>	<b>90</b>
<b>Phase-Locked Loop (PLL)</b>	<b>99</b>

Serial Peripheral Interface (SPI)	100
Timer	105
Universal Asynchronous Receiver/Transmitter (UART)	114
Interrupt Service Routines	118

## 3 Data Structure Index

### 3.1 Data Structures

Here are the data structures with brief descriptions:

<a href="#">Fifo_t</a>	122
<a href="#">GpioPort_t</a>	123
<a href="#">Led_t</a>	123
<a href="#">Spi_t</a>	123
<a href="#">Timer_t</a>	124
<a href="#">Uart_t</a>	124

## 4 File Index

### 4.1 File List

Here is a list of all documented files with brief descriptions:

<a href="#">DAQ.c</a>	
Source code for DAQ module	124
<a href="#">DAQ.h</a>	
Application software for handling data acquisition (DAQ) functions	125
<a href="#">DAQ_lookup.c</a>	
Source code for DAQ module's lookup table	125
<a href="#">Font.c</a>	
Contains bitmaps for a selection of ASCII characters	126
<a href="#">LCD.c</a>	
Source code for LCD module	126
<a href="#">LCD.h</a>	
Header file for LCD module	127
<a href="#">QRS.c</a>	
Source code for QRS detection module	128

<b>QRS.h</b>	
Header file for QRS detection module	128
<b>Fifo.c</b>	
Source code for FIFO buffer module	129
<b>Fifo.h</b>	
Header file for FIFO buffer implementation	129
<b>NewAssert.c</b>	
Source code for custom <code>assert</code> implementation	130
<b>NewAssert.h</b>	
Header file for custom <code>assert</code> implementation	131
<b>ADC.c</b>	
Source code for analog-to-digital conversion (ADC) module	131
<b>ADC.h</b>	
Header file for analog-to-digital conversion (ADC) module	132
<b>GPIO.c</b>	
Source code for GPIO module	132
<b>GPIO.h</b>	
Header file for general-purpose input/output (GPIO) device driver	132
<b>ISR.c</b>	
Source code for interrupt service routine (ISR) configuration module	133
<b>ISR.h</b>	
Header file for interrupt service routine (ISR) configuration module	134
<b>PLL.c</b>	
Implementation details for phase-lock-loop (PLL) functions	134
<b>PLL.h</b>	
Driver module for activating the phase-locked-loop (PLL)	135
<b>SPI.c</b>	
Source code for serial peripheral interface (SPI) module	135
<b>SPI.h</b>	
Header file for serial peripheral interface (SPI) module	135
<b>Timer.c</b>	
Source code for Timer module	136
<b>Timer.h</b>	
Device driver for general-purpose timer modules	137
<b>UART.c</b>	
Source code for UART module	138
<b>UART.h</b>	
Driver module for serial communication via UART0 and UART 1	138
<b>main.c</b>	
Main program file	139
<b>Debug.c</b>	
Source code for Debug module	140


<a href="#">Debug.h</a>	Header file for Debug module	140
<a href="#">ILI9341.c</a>	Source code for ILI9341 module	141
<a href="#">ILI9341.h</a>	Driver module for interfacing with an ILI9341 LCD driver	142
<a href="#">Led.c</a>	Source code for LED module	143
<a href="#">Led.h</a>	Interface for LED module	143

## 5 Topic Documentation

### 5.1 Application Software

Application-specific software modules.

Collaboration diagram for Application Software:

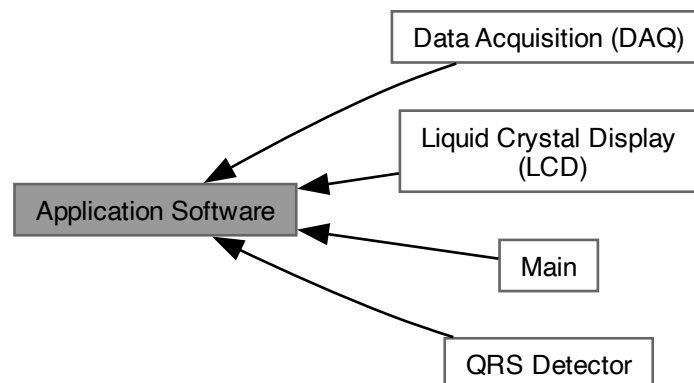

#### Modules

- [Data Acquisition \(DAQ\)](#)  
*Module for managing data acquisition (DAQ) functions.*
- [Liquid Crystal Display \(LCD\)](#)  
*Module for displaying graphs on an LCD via the [ILI9341](#) module.*
- [QRS Detector](#)  
*Module for analyzing ECG data to determine heart rate.*
- [Main](#)  
*Main program file.*

### 5.1.1 Detailed Description

Application-specific software modules.

These modules contain functions built specifically for this project's purposes.

### 5.1.2 Data Acquisition (DAQ)

Module for managing data acquisition (DAQ) functions.

#### Files

- file [DAQ.c](#)  
*Source code for DAQ module.*
- file [DAQ.h](#)  
*Application software for handling data acquisition (DAQ) functions.*
- file [DAQ\\_lookup.c](#)  
*Source code for DAQ module's lookup table.*

#### Macros

- `#define SAMPLING_PERIOD_MS 5`  
*sampling period in ms ( $T_s = \frac{1}{f_s}$ )*
- `#define DAQ_LOOKUP_MAX ((float32_t) 5.5f)`  
*maximum lookup table value*
- `#define DAQ_LOOKUP_MIN ((float32_t) (-5.5f))`  
*minimum lookup table value*

#### Variables

- static const float32\_t **DAQ\_LOOKUP\_TABLE** [4096]  
*Lookup table for converting ADC data from unsigned 12-bit integer values to 32-bit floating point values.*

#### Digital Filters

- enum {  
**NUM\_STAGES\_NOTCH** = 6 , **NUM\_COEFFS\_NOTCH** = NUM\_STAGES\_NOTCH \* 5 , **STATE\_BUFFER\_SIZE\_NOTCH** = NUM\_STAGES\_NOTCH \* 4 , **NUM\_STAGES\_BANDPASS** = 4 ,  
**NUM\_COEFFS\_DAQ\_BANDPASS** = NUM\_STAGES\_BANDPASS \* 5 , **STATE\_BUFFER\_SIZE\_BANDPASS** = NUM\_STAGES\_BANDPASS \* 4 }
- typedef arm\_biquad\_casd\_df1\_inst\_f32 **Filter\_t**
- static const float32\_t [COEFFS\\_NOTCH](#) [NUM\_COEFFS\_NOTCH]
- static const float32\_t [COEFFS\\_BANDPASS](#) [NUM\_COEFFS\_DAQ\_BANDPASS]
- static float32\_t **stateBuffer\_Notch** [STATE\_BUFFER\_SIZE\_NOTCH]
- static const Filter\_t **notchFiltStruct** = { NUM\_STAGES\_NOTCH, stateBuffer\_Notch, COEFFS\_NOTCH }
- static const Filter\_t \*const **notchFilter** = &notchFiltStruct
- static float32\_t **stateBuffer\_Bandpass** [STATE\_BUFFER\_SIZE\_BANDPASS]
- static const Filter\_t [bandpassFiltStruct](#)
- static const Filter\_t \*const **bandpassFilter** = &bandpassFiltStruct



## Initialization

- void `DAQ_Init` (void)  
*Initialize the data acquisition (DAQ) module.*

## Reading Input Data

- uint16\_t `DAQ_readSample` (void)  
*Read a sample from the ADC.*
- void `DAQ_acknowledgeInterrupt` (void)  
*Acknowledge the ADC interrupt.*
- float32\_t `DAQ_convertToMilliVolts` (uint16\_t sample)  
*Convert a 12-bit ADC sample to a floating-point voltage value via LUT.*

## Digital Filtering Functions

- float32\_t `DAQ_NotchFilter` (volatile float32\_t xn)  
*Apply a 60 [Hz] notch filter to an input sample.*
- float32\_t `DAQ_BandpassFilter` (volatile float32\_t xn)  
*Apply a 0.5-40 [Hz] bandpass filter to an input sample.*

### 5.1.2.1 Detailed Description

Module for managing data acquisition (DAQ) functions.

### 5.1.2.2 Function Documentation

#### `DAQ_Init()`

```
void DAQ_Init (  
    void )
```

Initialize the data acquisition (DAQ) module.

#### Postcondition

The analog-to-digital converter (ADC) is initialized and configured for timer-triggered sample capture.

The timer is initialized in `PERIODIC` mode and triggers the ADC every  $5ms$  (i.e. sampling frequency  $f_s = 200Hz$ ).

The DAQ module has access to its lookup table (LUT).

#### `DAQ_readSample()`

```
uint16_t DAQ_readSample (  
    void )
```

Read a sample from the ADC.

#### Precondition

Initialize the DAQ module.

This should be used in an interrupt handler and/or at a consistent rate (i.e. the sampling frequency).

**Parameters**

out	sample	12-bit sample in range [0x000, 0xFFF]
-----	--------	---------------------------------------

**Postcondition**

The sample can now be converted to millivolts.

**See also**

[DAQ\\_convertToMilliVolts\(\)](#)

**DAQ\_acknowledgeInterrupt()**

```
void DAQ_acknowledgeInterrupt (
    void )
```

Acknowledge the ADC interrupt.

**Precondition**

This should be used within an interrupt handler.

**DAQ\_NotchFilter()**

```
float32_t DAQ_NotchFilter (
    volatile float32_t xn )
```

Apply a 60 [Hz] notch filter to an input sample.

**Precondition**

Read a sample from the ADC and convert it to millivolts.

**Parameters**

in	xn	Raw input sample
out	yn	Filtered output sample

**Postcondition**

$y[n]$  is ready for analysis and/or further processing.

**See also**

[DAQ\\_BandpassFilter\(\)](#)

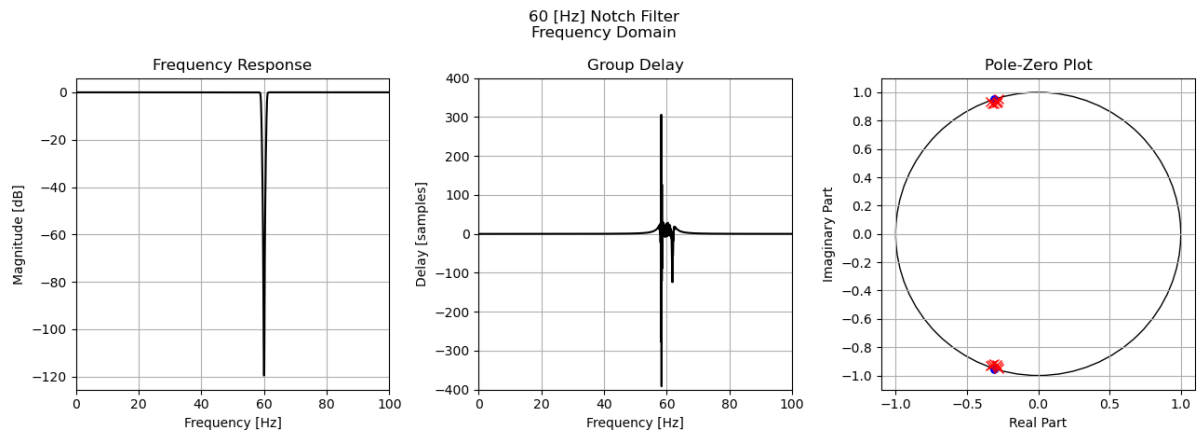


Figure 1 Frequency domain parameters for the notch filter.

### DAQ\_BandpassFilter()

```
float32_t DAQ_BandpassFilter (
    volatile float32_t xn )
```

Apply a 0.5-40 [Hz] bandpass filter to an input sample.

#### Precondition

Read a sample from the ADC and convert it to millivolts.

#### Parameters

in	$xn$	Input sample
out	$yn$	Filtered output sample

#### Postcondition

$y[n]$  is ready for analysis and/or further processing.

See also

[DAQ\\_NotchFilter\(\)](#)

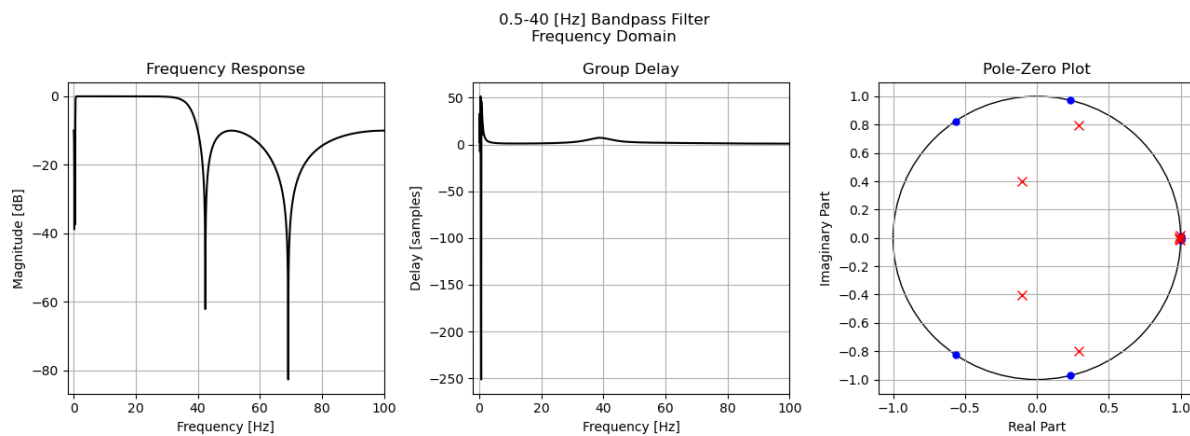


Figure 2 Frequency domain parameters for the bandpass filter.

### DAQ\_convertToMilliVolts()

```
float32_t DAQ_convertToMilliVolts (
    uint16_t sample )
```

Convert a 12-bit ADC sample to a floating-point voltage value via LUT.

#### Precondition

Read a sample from the ADC.

#### Parameters

in	<i>sample</i>	12-bit sample in range $[0x000, 0xFFF]$
out	<i>xn</i>	Voltage value in range $[-5.5, 5.5][mV]$

#### Postcondition

The sample  $x[n]$  is ready for filtering.

See also

[DAQ\\_readSample\(\)](#)

#### Note

Defined in [DAQ\\_lookup.c](#) rather than [DAQ.c](#).

### 5.1.2.3 Variable Documentation

#### COEFFS\_NOTCH

```
const float32_t COEFFS_NOTCH[NUM_COEFFS_NOTCH] [static]
```

##### Initial value:

```
= {
    0.8856732845306396f, 0.5476464033126831f, 0.8856732845306396f,
    -0.5850160717964172f, -0.9409302473068237f,

    1.0f, 0.6183391213417053f, 1.0f,
    -0.615153431892395f, -0.9412328004837036f,

    1.0f, 0.6183391213417053f, 1.0f,
    -0.5631667971611023f, -0.9562366008758545f,

    1.0f, 0.6183391213417053f, 1.0f,
    -0.6460562348365784f, -0.9568508863449097f,

    1.0f, 0.6183391213417053f, 1.0f,
    -0.5554963946342468f, -0.9837208390235901f,

    1.0f, 0.6183391213417053f, 1.0f,
    -0.6700929999351501f, -0.9840363264083862f,
}
```

#### COEFFS\_BANDPASS

```
const float32_t COEFFS_BANDPASS[NUM_COEFFS_DAQ_BANDPASS] [static]
```

##### Initial value:

```
= {
    0.3240305185317993f, 0.3665695786476135f, 0.3240305185317993f,
    -0.20968256890773773f, -0.1729172021150589f,

    1.0f, -0.4715292155742645f, 1.0f,
    0.5868059992790222f, -0.7193671464920044f,

    1.0f, -1.9999638795852661f, 1.0f,
    1.9863483905792236f, -0.986438512802124f,

    1.0f, -1.9997893571853638f, 1.0f,
    1.994096040725708f, -0.9943605065345764f,
}
```

#### bandpassFiltStruct

```
const Filter_t bandpassFiltStruct [static]
```

##### Initial value:

```
= { NUM_STAGES_BANDPASS, stateBuffer_Bandpass,
                                         COEFFS_BANDPASS }
```

### 5.1.3 Liquid Crystal Display (LCD)

Module for displaying graphs on an LCD via the [ILI9341](#) module.

## Files

- file [Font.c](#)  
*Contains bitmaps for a selection of ASCII characters.*
- file [LCD.c](#)  
*Source code for LCD module.*
- file [LCD.h](#)  
*Header file for LCD module.*

## Macros

- `#define CONVERT_INT_TO_ASCII(X) ((unsigned char) (X + 0x30))`

## Variables

- `const uint8_t *const FONT_ARRAY [128]`
- `struct {`
  - `uint16_t x1`  
*starting x-value in range [0, x2]*
  - `uint16_t x2`  
*ending x-value in range [0, NUM\_ROWS)*
  - `uint16_t y1`  
*starting y-value in range [0, y2]*
  - `uint16_t y2`  
*ending x-value in range [0, NUM\_COLS)*
  - `uint16_t lineNumber`  
*line number for text; in range [0, NUM\_LINES)*
  - `uint16_t colNum`  
*column number for text; in range [0, NUM\_COLS)*
  - `uint8_t color`
  - `bool isInit`  
*if true, LCD has been initialized*
- `} lcd = { 0 }`
- `const uint8_t *const FONT_ARRAY [128]`

## Initialization & Configuration

- `enum LCD_PLOT_INFO { LCD_X_MAX = ILI9341_NUM_ROWS - 1 , LCD_Y_MAX = ILI9341_NUM_COLS - 1 }`
- `enum LCD_COLORS {`
  - `LCD_BLACK = 0x00 ^ 0x07 , LCD_RED = 0x04 ^ 0x07 , LCD_GREEN = 0x02 ^ 0x07 , LCD_BLUE = 0x01 ^ 0x07 ,`
  - `LCD_YELLOW = 0x06 ^ 0x07 , LCD_CYAN = 0x03 ^ 0x07 , LCD_PURPLE = 0x05 ^ 0x07 , LCD_WHITE = 0x07 ^ 0x07 }`
- `void LCD_Init (void)`  
*Initialize the LCD.*
- `void LCD_setOutputMode (bool isOn)`  
*Toggle display output ON or OFF (OFF by default).*
- `void LCD_setX (uint16_t x1, uint16_t x2)`  
*Set new x-coordinates to be written to.  $0 \leq x1 \leq x2 \leq X_{MAX}$ .*
- `void LCD_setY (uint16_t y1, uint16_t y2)`  
*Set new y-coordinates to be written to.  $0 \leq y1 \leq y2 \leq Y_{MAX}$ .*
- `void LCD_setColor (uint8_t color)`  
*Set the color value.*

## Writing

- enum **LCD\_WRITING\_INFO** { **HEIGHT\_CHAR** = 8 , **LEN\_CHAR** = 5 , **NUM\_LINES** = 30 , **NUM\_COLS** = 64 }
- void **LCD\_setCursor** (uint16\_t **lineNum**, uint16\_t **colNum**)  
*Set the cursor to line  $x$ , column  $y$ .*
- void **LCD\_writeChar** (unsigned char **inputChar**)
- void **LCD\_writeStr** (void \***asciiString**)
- void **LCD\_writeInt** (int32\_t **num**)
- void **LCD\_writeFloat** (float **num**)

## ASCII Characters (Punctuation)

- static const uint8\_t **FONT\_SPACE** [8]
- static const uint8\_t **FONT\_PERIOD** [8]
- static const uint8\_t **FONT\_COLON** [8]

## ASCII Characters (Numbers)

- static const uint8\_t **FONT\_0** [8]
- static const uint8\_t **FONT\_1** [8]
- static const uint8\_t **FONT\_2** [8]
- static const uint8\_t **FONT\_3** [8]
- static const uint8\_t **FONT\_4** [8]
- static const uint8\_t **FONT\_5** [8]
- static const uint8\_t **FONT\_6** [8]
- static const uint8\_t **FONT\_7** [8]
- static const uint8\_t **FONT\_8** [8]
- static const uint8\_t **FONT\_9** [8]

## ASCII Characters (Uppercase Letters)

- static const uint8\_t **FONT\_UPPER\_A** [8]
- static const uint8\_t **FONT\_UPPER\_B** [8]
- static const uint8\_t **FONT\_UPPER\_C** [8]
- static const uint8\_t **FONT\_UPPER\_D** [8]
- static const uint8\_t **FONT\_UPPER\_E** [8]
- static const uint8\_t **FONT\_UPPER\_F** [8]
- static const uint8\_t **FONT\_UPPER\_G** [8]
- static const uint8\_t **FONT\_UPPER\_H** [8]
- static const uint8\_t **FONT\_UPPER\_I** [8]
- static const uint8\_t **FONT\_UPPER\_J** [8]
- static const uint8\_t **FONT\_UPPER\_K** [8]
- static const uint8\_t **FONT\_UPPER\_L** [8]
- static const uint8\_t **FONT\_UPPER\_M** [8]
- static const uint8\_t **FONT\_UPPER\_N** [8]
- static const uint8\_t **FONT\_UPPER\_O** [8]
- static const uint8\_t **FONT\_UPPER\_P** [8]
- static const uint8\_t **FONT\_UPPER\_Q** [8]
- static const uint8\_t **FONT\_UPPER\_R** [8]
- static const uint8\_t **FONT\_UPPER\_S** [8]
- static const uint8\_t **FONT\_UPPER\_T** [8]
- static const uint8\_t **FONT\_UPPER\_U** [8]
- static const uint8\_t **FONT\_UPPER\_V** [8]
- static const uint8\_t **FONT\_UPPER\_W** [8]
- static const uint8\_t **FONT\_UPPER\_X** [8]
- static const uint8\_t **FONT\_UPPER\_Y** [8]
- static const uint8\_t **FONT\_UPPER\_Z** [8]

**ASCII Characters (Lowercase Letters)**

- static const uint8\_t [FONT\\_LOWER\\_A](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_B](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_C](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_D](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_E](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_F](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_G](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_H](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_I](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_J](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_K](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_L](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_M](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_N](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_O](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_P](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_Q](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_R](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_S](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_T](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_U](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_V](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_W](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_X](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_Y](#) [8]
- static const uint8\_t [FONT\\_LOWER\\_Z](#) [8]

**Helper Functions**

- static void [LCD\\_drawLine](#) (uint16\_t center, uint16\_t lineWidth, bool is\_horizontal)  
*Helper function for drawing straight lines.*
- static void [LCD\\_updateCursor](#) (void)  
*Update the cursor for after writing text on the display.*

**Drawing**

- void [LCD\\_Draw](#) (void)  
*Draw on the LCD.*
- void [LCD\\_Fill](#) (void)  
*Fill the display with a single color.*
- void [LCD\\_drawHoriLine](#) (uint16\_t yCenter, uint16\_t lineWidth)  
*Draw a horizontal line across the entire display.*
- void [LCD\\_drawVertLine](#) (uint16\_t xCenter, uint16\_t lineWidth)  
*Draw a vertical line across the entire display.*
- void [LCD\\_drawRectangle](#) (uint16\_t x1, uint16\_t dx, uint16\_t y1, uint16\_t dy)  
*Draw a rectangle of size  $dx \times dy$  onto the display. The bottom-left corner will be located at  $(x1, y1)$ .*
- void [LCD\\_plotSample](#) (uint16\_t x, uint16\_t y, uint8\_t color)  
*Plot a sample at coordinates  $(x, y)$ .*



### 5.1.3.1 Detailed Description

Module for displaying graphs on an LCD via the [ILI9341](#) module.

### 5.1.3.2 Function Documentation

#### LCD\_drawLine()

```
static void LCD_drawLine (
    uint16_t center,
    uint16_t lineWidth,
    bool is_horizontal ) [static]
```

Helper function for drawing straight lines.

##### Parameters

<i>center</i>	Row or column that the line is centered on. <i>center</i> is increased or decreased if the line to be written would have gone out of bounds.
<i>lineWidth</i>	Width of the line. Should be a positive, odd number.
<i>is_row</i>	true for horizontal line, false for vertical line

#### LCD\_Init()

```
void LCD_Init (
    void )
```

Initialize the LCD.

##### Postcondition

The display will be ready to accept commands, but output will be off.

#### LCD\_setOutputMode()

```
void LCD_setOutputMode (
    bool isOn )
```

Toggle display output ON or OFF (OFF by default).

##### Parameters

in	<i>isOn</i>	true to turn display output ON, false to turn OFF
----	-------------	---

##### Postcondition

When OFF, the display is cleared. When ON, the IC writes pixel data from its memory to the display.

**LCD\_setX()**

```
void LCD_setX (
    uint16_t x1,
    uint16_t x2 )
```

Set new x-coordinates to be written to.  $0 \leq x1 \leq x2 \leq X_{MAX}$ .

**Parameters**

in	<i>x1</i>	left-most x-coordinate
in	<i>x2</i>	right-most x-coordinate

**See also**

[LCD\\_setY\(\)](#)

**LCD\_setY()**

```
void LCD_setY (
    uint16_t y1,
    uint16_t y2 )
```

Set new y-coordinates to be written to.  $0 \leq y1 \leq y2 \leq Y_{MAX}$ .

**Parameters**

in	<i>y1</i>	lowest y-coordinate
in	<i>y2</i>	highest y-coordinate

**See also**

[LCD\\_setX\(\)](#)

**LCD\_setColor()**

```
void LCD_setColor (
    uint8_t color )
```

Set the color value.

**Parameters**

in	<i>color</i>	Color to use.
----	--------------	---------------

**Postcondition**

Outgoing pixel data will use the selected color.

**LCD\_Draw()**

```
void LCD_Draw (
    void )
```

Draw on the LCD.

**Precondition**

Set the drawable area and the color to use for that area.

**Postcondition**

The selected areas of the display will be drawn onto with the selected color.

**See also**

[LCD\\_setX\(\)](#), [LCD\\_setY\(\)](#), [LCD\\_setColor\(\)](#)

References [ILI9341\\_writeMemCmd\(\)](#), and [ILI9341\\_writePixel\(\)](#).

**LCD\_Fill()**

```
void LCD_Fill (
    void )
```

Fill the display with a single color.

**Precondition**

Select the desired color to fill the display with.

**See also**

[LCD\\_setColor\(\)](#)

**LCD\_drawHoriLine()**

```
void LCD_drawHoriLine (
    uint16_t yCenter,
    uint16_t lineWidth )
```

Draw a horizontal line across the entire display.

**Precondition**

Select the desired color to use for the line.

**Parameters**

in	<i>yCenter</i>	y-coordinate to center the line on
in	<i>lineWidth</i>	width of the line; should be a positive, odd number

**See also**

[LCD\\_drawVertLine](#), [LCD\\_drawRectangle\(\)](#)

**LCD\_drawVertLine()**

```
void LCD_drawVertLine (
    uint16_t xCenter,
    uint16_t lineWidth )
```

Draw a vertical line across the entire display.

**Precondition**

Select the desired color to use for the line.

**Parameters**

in	<i>xCenter</i>	x-coordinate to center the line on
in	<i>lineWidth</i>	width of the line; should be a positive, odd number

**See also**

[LCD\\_drawHoriLine](#), [LCD\\_drawRectangle\(\)](#)

**LCD\_drawRectangle()**

```
void LCD_drawRectangle (
    uint16_t x1,
    uint16_t dx,
    uint16_t y1,
    uint16_t dy )
```

Draw a rectangle of size dx x dy onto the display. The bottom-left corner will be located at (x1, y1).

**Precondition**

Select the desired color to use for the rectangle.

**Parameters**

in	<i>x1</i>	lowest (left-most) x-coordinate
in	<i>dx</i>	length (horizontal distance) of the rectangle
in	<i>y1</i>	lowest (bottom-most) y-coordinate
in	<i>dy</i>	height (vertical distance) of the rectangle

See also

[LCD\\_Draw\(\)](#), [LCD\\_Fill\(\)](#), [LCD\\_drawHoriLine\(\)](#), [LCD\\_drawVertLine\(\)](#)

### LCD\_plotSample()

```
void LCD_plotSample (
    uint16_t x,
    uint16_t y,
    uint8_t color )
```

Plot a sample at coordinates (x, y).

#### Parameters

in	<i>x</i>	x-coordinate (i.e. sample number) in range [0, X_MAX]
in	<i>y</i>	y-coordinate (i.e. amplitude) in range [0, Y_MAX]
in	<i>color</i>	Color to use

See also

[LCD\\_setX\(\)](#), [LCD\\_setY\(\)](#), [LCD\\_setColor\(\)](#), [LCD\\_Draw\(\)](#)

### LCD\_setCursor()

```
void LCD_setCursor (
    uint16_t lineNum,
    uint16_t colNum )
```

Set the cursor to line x, column y.

#### Parameters

in	<i>lineNum</i>	Line number to place characters. Should be in range [0, 30).
in	<i>colNum</i>	Column number to place characters. Should be in range [0, 64).

## 5.1.3.3 Variable Documentation

### FONT\_SPACE

```
const uint8_t FONT_SPACE[8] [static]
```

Initial value:

```
= {
    0x00,
    0x00,
    0x00,
    0x00,
    0x00,
    0x00,
    0x00,
    0x00
}
```

**FONT\_PERIOD**

```
const uint8_t FONT_PERIOD[8]  [static]
```

**Initial value:**

```
= {  
    0x00,  
    0x00,  
    0x00,  
    0x00,  
    0x00,  
    0x00,  
    0x00,  
    0x04,  
    0x04  
}
```

**FONT\_COLON**

```
const uint8_t FONT_COLON[8]  [static]
```

**Initial value:**

```
= {  
    0x00,  
    0x04,  
    0x00,  
    0x00,  
    0x00,  
    0x00,  
    0x04,  
    0x00,  
    0x00  
}
```

**FONT\_0**

```
const uint8_t FONT_0[8]  [static]
```

**Initial value:**

```
= {  
    0x0E,  
    0x11,  
    0x13,  
    0x15,  
    0x19,  
    0x11,  
    0x11,  
    0x0E  
}
```

**FONT\_1**

```
const uint8_t FONT_1[8]  [static]
```

**Initial value:**

```
= {  
    0x06,  
    0x0E,  
    0x16,  
    0x06,  
    0x06,  
    0x06,  
    0x06,  
    0x1F  
}
```

## FONT\_2

```
const uint8_t FONT_2[8]  [static]
```

### Initial value:

```
= {  
    0x0E,  
    0x11,  
    0x01,  
    0x06,  
    0x08,  
    0x10,  
    0x11,  
    0x1F  
}
```

## FONT\_3

```
const uint8_t FONT_3[8]  [static]
```

### Initial value:

```
= {  
    0x0E,  
    0x11,  
    0x01,  
    0x06,  
    0x01,  
    0x11,  
    0x11,  
    0x0E  
}
```

## FONT\_4

```
const uint8_t FONT_4[8]  [static]
```

### Initial value:

```
= {  
    0x02,  
    0x06,  
    0x0A,  
    0x12,  
    0x1F,  
    0x02,  
    0x02,  
    0x02  
}
```

## FONT\_5

```
const uint8_t FONT_5[8]  [static]
```

### Initial value:

```
= {  
    0x1F,  
    0x10,  
    0x10,  
    0x1E,  
    0x01,  
    0x11,  
    0x11,  
    0x0E  
}
```

**FONT\_6**

```
const uint8_t FONT_6[8] [static]
```

**Initial value:**

```
= {  
    0x0E,  
    0x11,  
    0x10,  
    0x1E,  
    0x11,  
    0x11,  
    0x11,  
    0x11,  
    0x0E  
}
```

**FONT\_7**

```
const uint8_t FONT_7[8] [static]
```

**Initial value:**

```
= {  
    0x1F,  
    0x11,  
    0x01,  
    0x02,  
    0x04,  
    0x04,  
    0x04,  
    0x04,  
    0x04  
}
```

**FONT\_8**

```
const uint8_t FONT_8[8] [static]
```

**Initial value:**

```
= {  
    0x0E,  
    0x11,  
    0x11,  
    0x0E,  
    0x11,  
    0x11,  
    0x11,  
    0x0E  
}
```

**FONT\_9**

```
const uint8_t FONT_9[8] [static]
```

**Initial value:**

```
= {  
    0x0E,  
    0x11,  
    0x11,  
    0x0F,  
    0x01,  
    0x01,  
    0x11,  
    0x0E  
}
```



**FONT\_UPPER\_A**

```
const uint8_t FONT_UPPER_A[8]  [static]
```

**Initial value:**

```
= {  
    0x0E,  
    0x11,  
    0x11,  
    0x1F,  
    0x11,  
    0x11,  
    0x11,  
    0x11  
}
```

**FONT\_UPPER\_B**

```
const uint8_t FONT_UPPER_B[8]  [static]
```

**Initial value:**

```
= {  
    0x1E,  
    0x11,  
    0x11,  
    0x1E,  
    0x11,  
    0x11,  
    0x11,  
    0x1E  
}
```

**FONT\_UPPER\_C**

```
const uint8_t FONT_UPPER_C[8]  [static]
```

**Initial value:**

```
= {  
    0x0E,  
    0x11,  
    0x10,  
    0x10,  
    0x10,  
    0x11,  
    0x0E,  
    0x0E  
}
```

**FONT\_UPPER\_D**

```
const uint8_t FONT_UPPER_D[8]  [static]
```

**Initial value:**

```
= {  
    0x1E,  
    0x11,  
    0x11,  
    0x11,  
    0x11,  
    0x11,  
    0x11,  
    0x1E  
}
```

**FONT\_UPPER\_E**

```
const uint8_t FONT_UPPER_E[8]  [static]
```

**Initial value:**

```
= {  
    0x1F,  
    0x10,  
    0x10,  
    0x1E,  
    0x10,  
    0x10,  
    0x10,  
    0x1F  
}
```

**FONT\_UPPER\_F**

```
const uint8_t FONT_UPPER_F[8]  [static]
```

**Initial value:**

```
= {  
    0x1F,  
    0x10,  
    0x10,  
    0x1E,  
    0x10,  
    0x10,  
    0x10,  
    0x10  
}
```

**FONT\_UPPER\_G**

```
const uint8_t FONT_UPPER_G[8]  [static]
```

**Initial value:**

```
= {  
    0x0E,  
    0x11,  
    0x10,  
    0x10,  
    0x17,  
    0x11,  
    0x11,  
    0x0E  
}
```

**FONT\_UPPER\_H**

```
const uint8_t FONT_UPPER_H[8]  [static]
```

**Initial value:**

```
= {  
    0x11,  
    0x11,  
    0x11,  
    0x1F,  
    0x1F,  
    0x11,  
    0x11,  
    0x11  
}
```

## FONT\_UPPER\_I

```
const uint8_t FONT_UPPER_I[8]  [static]
```

### Initial value:

```
= {  
    0x1F,  
    0x0A,  
    0x0A,  
    0x0A,  
    0x0A,  
    0x0A,  
    0x0A,  
    0x1F  
}
```

## FONT\_UPPER\_J

```
const uint8_t FONT_UPPER_J[8]  [static]
```

### Initial value:

```
= {  
    0x0E,  
    0x05,  
    0x05,  
    0x05,  
    0x05,  
    0x15,  
    0x15,  
    0x0E  
}
```

## FONT\_UPPER\_K

```
const uint8_t FONT_UPPER_K[8]  [static]
```

### Initial value:

```
= {  
    0x12,  
    0x14,  
    0x18,  
    0x1C,  
    0x1C,  
    0x14,  
    0x12,  
    0x11  
}
```

## FONT\_UPPER\_L

```
const uint8_t FONT_UPPER_L[8]  [static]
```

### Initial value:

```
= {  
    0x10,  
    0x10,  
    0x10,  
    0x10,  
    0x10,  
    0x10,  
    0x1F,  
    0x1F  
}
```

**FONT\_UPPER\_M**

```
const uint8_t FONT_UPPER_M[8]  [static]
```

**Initial value:**

```
= {  
    0x11,  
    0x1B,  
    0x1B,  
    0x15,  
    0x15,  
    0x11,  
    0x11,  
    0x11  
}
```

**FONT\_UPPER\_N**

```
const uint8_t FONT_UPPER_N[8]  [static]
```

**Initial value:**

```
= {  
    0x11,  
    0x19,  
    0x19,  
    0x1D,  
    0x15,  
    0x13,  
    0x11,  
    0x11  
}
```

**FONT\_UPPER\_O**

```
const uint8_t FONT_UPPER_O[8]  [static]
```

**Initial value:**

```
= {  
    0x0E,  
    0x11,  
    0x11,  
    0x11,  
    0x11,  
    0x11,  
    0x11,  
    0x0E  
}
```

**FONT\_UPPER\_P**

```
const uint8_t FONT_UPPER_P[8]  [static]
```

**Initial value:**

```
= {  
    0x1E,  
    0x11,  
    0x11,  
    0x1E,  
    0x10,  
    0x10,  
    0x10,  
    0x10  
}
```

**FONT\_UPPER\_Q**

```
const uint8_t FONT_UPPER_Q[8]  [static]
```

**Initial value:**

```
= {  
    0x0E,  
    0x11,  
    0x11,  
    0x11,  
    0x15,  
    0x19,  
    0x16,  
    0x0D  
}
```

**FONT\_UPPER\_R**

```
const uint8_t FONT_UPPER_R[8]  [static]
```

**Initial value:**

```
= {  
    0x1E,  
    0x11,  
    0x11,  
    0x1F,  
    0x18,  
    0x14,  
    0x12,  
    0x11  
}
```

**FONT\_UPPER\_S**

```
const uint8_t FONT_UPPER_S[8]  [static]
```

**Initial value:**

```
= {  
    0x0E,  
    0x11,  
    0x11,  
    0x0E,  
    0x01,  
    0x01,  
    0x11,  
    0x0E  
}
```

**FONT\_UPPER\_T**

```
const uint8_t FONT_UPPER_T[8]  [static]
```

**Initial value:**

```
= {  
    0x1F,  
    0x04,  
    0x04,  
    0x04,  
    0x04,  
    0x04,  
    0x04,  
    0x04  
}
```

**FONT\_UPPER\_U**

```
const uint8_t FONT_UPPER_U[8] [static]
```

**Initial value:**

```
= {  
    0x11,  
    0x11,  
    0x11,  
    0x11,  
    0x11,  
    0x11,  
    0x11,  
    0x0E  
}
```

**FONT\_UPPER\_V**

```
const uint8_t FONT_UPPER_V[8] [static]
```

**Initial value:**

```
= {  
    0x11,  
    0x11,  
    0x11,  
    0x11,  
    0x11,  
    0x0A,  
    0x0A,  
    0x04  
}
```

**FONT\_UPPER\_W**

```
const uint8_t FONT_UPPER_W[8] [static]
```

**Initial value:**

```
= {  
    0x11,  
    0x11,  
    0x11,  
    0x15,  
    0x15,  
    0x1B,  
    0x11,  
    0x11  
}
```

**FONT\_UPPER\_X**

```
const uint8_t FONT_UPPER_X[8] [static]
```

**Initial value:**

```
= {  
    0x11,  
    0x11,  
    0x0A,  
    0x0A,  
    0x04,  
    0x0A,  
    0x0A,  
    0x11  
}
```

## FONT\_UPPER\_Y

```
const uint8_t FONT_UPPER_Y[8]  [static]
```

### Initial value:

```
= {  
    0x11,  
    0x11,  
    0x11,  
    0x0A,  
    0x04,  
    0x04,  
    0x04,  
    0x04  
}
```

## FONT\_UPPER\_Z

```
const uint8_t FONT_UPPER_Z[8]  [static]
```

### Initial value:

```
= {  
    0x1F,  
    0x01,  
    0x01,  
    0x02,  
    0x04,  
    0x08,  
    0x10,  
    0x1F  
}
```

## FONT\_LOWER\_A

```
const uint8_t FONT_LOWER_A[8]  [static]
```

### Initial value:

```
= {  
    0x00,  
    0x00,  
    0x0E,  
    0x01,  
    0x0F,  
    0x11,  
    0x0F,  
    0x00  
}
```

## FONT\_LOWER\_B

```
const uint8_t FONT_LOWER_B[8]  [static]
```

### Initial value:

```
= {  
    0x10,  
    0x10,  
    0x1E,  
    0x11,  
    0x11,  
    0x11,  
    0x1E,  
    0x00  
}
```

## FONT\_LOWER\_C

```
const uint8_t FONT_LOWER_C[8]  [static]
```

### Initial value:

```
= {  
    0x00,  
    0x00,  
    0x0E,  
    0x10,  
    0x10,  
    0x11,  
    0x0E,  
    0x00  
}
```

## FONT\_LOWER\_D

```
const uint8_t FONT_LOWER_D[8]  [static]
```

### Initial value:

```
= {  
    0x01,  
    0x01,  
    0x0F,  
    0x11,  
    0x11,  
    0x11,  
    0x0F,  
    0x00  
}
```

## FONT\_LOWER\_E

```
const uint8_t FONT_LOWER_E[8]  [static]
```

### Initial value:

```
= {  
    0x00,  
    0x00,  
    0x0E,  
    0x11,  
    0x1F,  
    0x10,  
    0x0E,  
    0x00  
}
```

## FONT\_LOWER\_F

```
const uint8_t FONT_LOWER_F[8]  [static]
```

### Initial value:

```
= {  
    0x06,  
    0x09,  
    0x08,  
    0x1C,  
    0x08,  
    0x08,  
    0x08,  
    0x00  
}
```



## FONT\_LOWER\_G

```
const uint8_t FONT_LOWER_G[8]  [static]
```

### Initial value:

```
= {  
    0x00,  
    0x00,  
    0x0F,  
    0x11,  
    0x11,  
    0x0F,  
    0x01,  
    0x0E  
}
```

## FONT\_LOWER\_H

```
const uint8_t FONT_LOWER_H[8]  [static]
```

### Initial value:

```
= {  
    0x10,  
    0x10,  
    0x1E,  
    0x11,  
    0x11,  
    0x11,  
    0x11,  
    0x11,  
    0x00  
}
```

## FONT\_LOWER\_I

```
const uint8_t FONT_LOWER_I[8]  [static]
```

### Initial value:

```
= {  
    0x04,  
    0x00,  
    0x0C,  
    0x04,  
    0x04,  
    0x04,  
    0x04,  
    0x0E,  
    0x00  
}
```

## FONT\_LOWER\_J

```
const uint8_t FONT_LOWER_J[8]  [static]
```

### Initial value:

```
= {  
    0x02,  
    0x00,  
    0x06,  
    0x02,  
    0x02,  
    0x12,  
    0x12,  
    0x0C  
}
```

**FONT\_LOWER\_K**

```
const uint8_t FONT_LOWER_K[8]  [static]
```

**Initial value:**

```
= {  
    0x10,  
    0x10,  
    0x12,  
    0x14,  
    0x18,  
    0x14,  
    0x12,  
    0x00  
}
```

**FONT\_LOWER\_L**

```
const uint8_t FONT_LOWER_L[8]  [static]
```

**Initial value:**

```
= {  
    0x0C,  
    0x04,  
    0x04,  
    0x04,  
    0x04,  
    0x04,  
    0x0E,  
    0x00  
}
```

**FONT\_LOWER\_M**

```
const uint8_t FONT_LOWER_M[8]  [static]
```

**Initial value:**

```
= {  
    0x00,  
    0x00,  
    0x1A,  
    0x15,  
    0x15,  
    0x11,  
    0x11,  
    0x00  
}
```

**FONT\_LOWER\_N**

```
const uint8_t FONT_LOWER_N[8]  [static]
```

**Initial value:**

```
= {  
    0x00,  
    0x00,  
    0x1E,  
    0x11,  
    0x11,  
    0x11,  
    0x11,  
    0x00  
}
```

## FONT\_LOWER\_O

```
const uint8_t FONT_LOWER_O[8]  [static]
```

### Initial value:

```
= {  
    0x00,  
    0x00,  
    0x0E,  
    0x11,  
    0x11,  
    0x11,  
    0x0E,  
    0x00  
}
```

## FONT\_LOWER\_P

```
const uint8_t FONT_LOWER_P[8]  [static]
```

### Initial value:

```
= {  
    0x00,  
    0x00,  
    0x1E,  
    0x11,  
    0x11,  
    0x1E,  
    0x10,  
    0x10  
}
```

## FONT\_LOWER\_Q

```
const uint8_t FONT_LOWER_Q[8]  [static]
```

### Initial value:

```
= {  
    0x00,  
    0x00,  
    0x0F,  
    0x11,  
    0x11,  
    0x0F,  
    0x01,  
    0x01  
}
```

## FONT\_LOWER\_R

```
const uint8_t FONT_LOWER_R[8]  [static]
```

### Initial value:

```
= {  
    0x00,  
    0x00,  
    0x1A,  
    0x15,  
    0x10,  
    0x10,  
    0x10,  
    0x00  
}
```

**FONT\_LOWER\_S**

```
const uint8_t FONT_LOWER_S[8]  [static]
```

**Initial value:**

```
= {  
    0x00,  
    0x00,  
    0x0E,  
    0x10,  
    0x0E,  
    0x01,  
    0x0E,  
    0x00  
}
```

**FONT\_LOWER\_T**

```
const uint8_t FONT_LOWER_T[8]  [static]
```

**Initial value:**

```
= {  
    0x04,  
    0x04,  
    0x0E,  
    0x04,  
    0x04,  
    0x04,  
    0x02,  
    0x00  
}
```

**FONT\_LOWER\_U**

```
const uint8_t FONT_LOWER_U[8]  [static]
```

**Initial value:**

```
= {  
    0x00,  
    0x00,  
    0x11,  
    0x11,  
    0x11,  
    0x11,  
    0x0F,  
    0x00  
}
```

**FONT\_LOWER\_V**

```
const uint8_t FONT_LOWER_V[8]  [static]
```

**Initial value:**

```
= {  
    0x00,  
    0x00,  
    0x11,  
    0x11,  
    0x11,  
    0x0A,  
    0x04,  
    0x00  
}
```

## FONT\_LOWER\_W

```
const uint8_t FONT_LOWER_W[8]  [static]
```

### Initial value:

```
= {  
    0x00,  
    0x00,  
    0x11,  
    0x11,  
    0x15,  
    0x15,  
    0x0A,  
    0x00  
}
```

## FONT\_LOWER\_X

```
const uint8_t FONT_LOWER_X[8]  [static]
```

### Initial value:

```
= {  
    0x00,  
    0x00,  
    0x11,  
    0x0A,  
    0x04,  
    0x0A,  
    0x11,  
    0x00  
}
```

## FONT\_LOWER\_Y

```
const uint8_t FONT_LOWER_Y[8]  [static]
```

### Initial value:

```
= {  
    0x00,  
    0x00,  
    0x11,  
    0x11,  
    0x0F,  
    0x01,  
    0x0E,  
    0x00  
}
```

## FONT\_LOWER\_Z

```
const uint8_t FONT_LOWER_Z[8]  [static]
```

### Initial value:

```
= {  
    0x00,  
    0x00,  
    0x1F,  
    0x02,  
    0x04,  
    0x08,  
    0x1F,  
    0x00  
}
```

### 5.1.4 QRS Detector

Module for analyzing ECG data to determine heart rate.

#### Files

- file [QRS.c](#)  
*Source code for QRS detection module.*
- file [QRS.h](#)  
*Header file for QRS detection module.*

#### Macros

- `#define QRS_NUM_FID_MARKS 40`
- `#define FLOAT_COMPARE_TOLERANCE (float32_t)(1E-5f)`
- `#define IS_GREATER(X, Y) (bool) ((X - Y) > FLOAT_COMPARE_TOLERANCE)`
- `#define IS_PEAK(X_MINUS_1, X, X_PLUS_1) (bool) (IS_GREATER(X, X_MINUS_1) && IS_GREATER(X, X_PLUS_1))`
- `#define QRS_SAMP_FREQ ((uint32_t) 200)`
- `#define QRS_SAMP_PERIOD_SEC ((float32_t) 0.005f)`
- `#define QRS_NUM_SAMP ((uint16_t) (1 << 11))`

#### Variables

- struct {  
    bool **isCalibrated**  
    float32\_t **signalLevel**  
        *estimated signal level*  
    float32\_t **noiseLevel**  
        *estimated noise level*  
    float32\_t **threshold**  
        *amplitude threshold*  
    uint16\_t **fidMarkArray** [QRS\_NUM\_FID\_MARKS]  
    float32\_t **utilityBuffer1** [QRS\_NUM\_FID\_MARKS]  
        *array to hold fidMark indices*  
    float32\_t **utilityBuffer2** [QRS\_NUM\_FID\_MARKS]  
} **Detector** = { false, 0.0f, 0.0f, 0.0f, { 0 }, { 0 }, { 0 } }

#### Digital Filters

- enum {  
    **NUM\_STAGES\_BANDPASS** = 4 , **NUM\_COEFF\_HIGHPASS** = NUM\_STAGES\_BANDPASS \* 5 , **STATE\_**  
    **\_BUFF\_SIZE\_BANDPASS** = NUM\_STAGES\_BANDPASS \* 4 , **NUM\_COEFF\_DERFILT** = 5 ,  
    **BLOCK\_SIZE\_DERFILT** = (1 << 8) , **STATE\_BUFF\_SIZE\_DERFILT** = NUM\_COEFF\_DERFILT + BLOCK\_↵  
    **\_SIZE\_DERFILT - 1** , **NUM\_COEFF\_MOVAVG** = 10 , **BLOCK\_SIZE\_MOVAVG** = BLOCK\_SIZE\_DERFILT ,  
    **STATE\_BUFF\_SIZE\_MOVAVG** = NUM\_COEFF\_MOVAVG + BLOCK\_SIZE\_MOVAVG - 1 }  
• typedef arm\_biquad\_casd\_df1\_inst\_f32 **IIR\_Filt\_t**  
• typedef arm\_fir\_instance\_f32 **FIR\_Filt\_t**  
• static const float32\_t [COEFF\\_BANDPASS](#) [NUM\_COEFF\_HIGHPASS]  
• static const float32\_t [COEFF\\_DERFILT](#) [NUM\_COEFF\_DERFILT]  
• static const float32\_t [COEFF\\_MOVAVG](#) [NUM\_COEFF\_MOVAVG]

- static float32\_t **stateBuffer\_bandPass** [STATE\_BUFF\_SIZE\_BANDPASS] = { 0 }
- static const IIR\_Filt\_t **bandpassFiltStruct** = { NUM\_STAGES\_BANDPASS, stateBuffer\_bandPass, COEFF↔  
\_BANDPASS }
- static const IIR\_Filt\_t \*const **bandpassFilter** = &bandpassFiltStruct
- static float32\_t **stateBuffer\_DerFilt** [STATE\_BUFF\_SIZE\_DERFILT] = { 0 }
- static const FIR\_Filt\_t **derivativeFiltStruct** = { NUM\_COEFF\_DERFILT, stateBuffer\_DerFilt, COEFF↔  
DERFILT }
- static const FIR\_Filt\_t \*const **derivativeFilter** = &derivativeFiltStruct
- static float32\_t **stateBuffer\_MovingAvg** [STATE\_BUFF\_SIZE\_MOVAVG] = { 0 }
- static const FIR\_Filt\_t **movingAvgFiltStruct** = { NUM\_COEFF\_MOVAVG, stateBuffer\_MovingAvg, COEFF↔  
\_MOVAVG }
- static const FIR\_Filt\_t \*const **movingAverageFilter** = &movingAvgFiltStruct

## Implementation

- static uint8\_t **QRS\_findFiducialMarks** (const float32\_t yn[], uint16\_t fidMarkArray[])  
*Mark local peaks in the input signal  $y$  as potential candidates for QRS complexes (AKA "fiducial marks").*
- static void **QRS\_initLevels** (const float32\_t yn[], float32\_t \*sigLvlPtr, float32\_t \*noiseLvlPtr)  
*Initialize the signal and noise levels for the QRS detector using the initial block of input signal data.*
- static float32\_t **QRS\_updateLevel** (const float32\_t peakAmplitude, float32\_t level)  
*Update the signal level (if a fiducial mark is a confirmed peak) or the noise level (if a fiducial mark is rejected).*
- static float32\_t **QRS\_updateThreshold** (const float32\_t signalLevel, const float32\_t noiseLevel)  
*Update the amplitude threshold used to identify peaks based on the signal and noise levels.*

## Interface Functions

- void **QRS\_Init** (void)  
*Initialize the QRS detector.*
- void **QRS\_Preprocess** (const float32\_t xn[], float32\_t yn[])  
*Preprocess the ECG data to remove noise and/or exaggerate the signal characteristic(s) of interest.*
- float32\_t **QRS\_applyDecisionRules** (const float32\_t yn[])  
*Calculate the average heart rate (HR) using predetermined decision rules.*
- float32\_t **QRS\_runDetection** (const float32\_t xn[], float32\_t yn[])  
*Run the full algorithm (preprocessing and decision rules) on the inputted ECG data.*

### 5.1.4.1 Detailed Description

Module for analyzing ECG data to determine heart rate.

### 5.1.4.2 Function Documentation

#### QRS\_findFiducialMarks()

```
static uint8_t QRS_findFiducialMarks (
    const float32_t yn[],
    uint16_t fidMarkArray[] ) [static]
```

Mark local peaks in the input signal  $y$  as potential candidates for QRS complexes (AKA "fiducial marks").

**Parameters**

in	<i>yn</i>	Array containing the preprocessed ECG signal $y[n]$
in	<i>fidMarkArray</i>	Array to place the fiducial mark's sample indices into.
out	<i>numMarks</i>	Number of identified fiducial marks

**Postcondition**

*fidMarkArray* will hold the values of the fiducial marks.

The fiducial marks must be spaced apart by at least 200 [ms] (40 samples @  $f_s = 200$  [Hz]). If a peak is found within this range, the one with the largest amplitude is taken to be the correct peak and the other is ignored.

**QRS\_initLevels()**

```
static void QRS_initLevels (
    const float32_t yn[],
    float32_t * sigLvlPtr,
    float32_t * noiseLvlPtr ) [static]
```

Initialize the signal and noise levels for the QRS detector using the initial block of input signal data.

**Parameters**

in	<i>yn</i>	Array containing the preprocessed ECG signal $y[n]$
in	<i>sigLvlPtr</i>	Pointer to variable holding the signal level value.
in	<i>noiseLvlPtr</i>	Pointer to variable holding the noise level value.

**Postcondition**

The signal and noise levels are initialized.

**QRS\_updateLevel()**

```
static float32_t QRS_updateLevel (
    const float32_t peakAmplitude,
    float32_t level ) [static]
```

Update the signal level (if a fiducial mark is a confirmed peak) or the noise level (if a fiducial mark is rejected).

**Parameters**

in	<i>peakAmplitude</i>	Amplitude of the fiducial mark in signal $y[n]$
in	<i>level</i>	The current value of the signal level or noise level
out	<i>newLevel</i>	The updated value of the signal level or noise level

$$signalLevel_1 = f(peakAmplitude, signalLevel_0) = \frac{1}{8}peakAmplitude + \frac{7}{8}signalLevel_0$$



$$noiseLevel_1 = f(peakAmplitude, noiseLevel_0) = \frac{1}{8}peakAmplitude + \frac{7}{8}noiseLevel_0$$

### QRS\_updateThreshold()

```
static float32_t QRS_updateThreshold (
    const float32_t signalLevel,
    const float32_t noiseLevel ) [static]
```

Update the amplitude threshold used to identify peaks based on the signal and noise levels.

#### Parameters

in	<i>signalLevel</i>	Current signal level.
in	<i>noiseLevel</i>	Current noise level.
out	<i>threshold</i>	New threshold to use for next comparison.

#### See also

[QRS\\_updateLevel\(\)](#), [QRS\\_applyDecisionRules](#)

$$threshold = f(signalLevel, noiseLevel) = noiseLevel + 0.25(signalLevel - noiseLevel)$$

### QRS\_Init()

```
void QRS_Init (
    void )
```

Initialize the QRS detector.

#### Note

This function isn't necessary anymore, but I'm keeping it here just in case.

This function originally initialized the filter `structs` but now does nothing since those have been made `const` and their initialization functions have been removed entirely.

### QRS\_Preprocess()

```
void QRS_Preprocess (
    const float32_t xn[],
    float32_t yn[] )
```

Preprocess the ECG data to remove noise and/or exaggerate the signal characteristic(s) of interest.

#### Precondition

Fill input buffer `xn` with raw or lightly preprocessed ECG data.

## Parameters

in	$x[n]$	Array of raw ECG signal values.
in	$y[n]$	Array used to store preprocessed ECG signal values.

## Postcondition

The preprocessed signal data  $y[n]$  is stored in  $y[n]$  and is ready to be analyzed to calculate the heart rate in [bpm].

## See also

[QRS\\_applyDecisionRules\(\)](#)

This function uses the same overall preprocessing pipeline as the original Pan-Tompkins algorithm, but the high-pass and low-pass filters have been replaced with ones generated using Scipy.

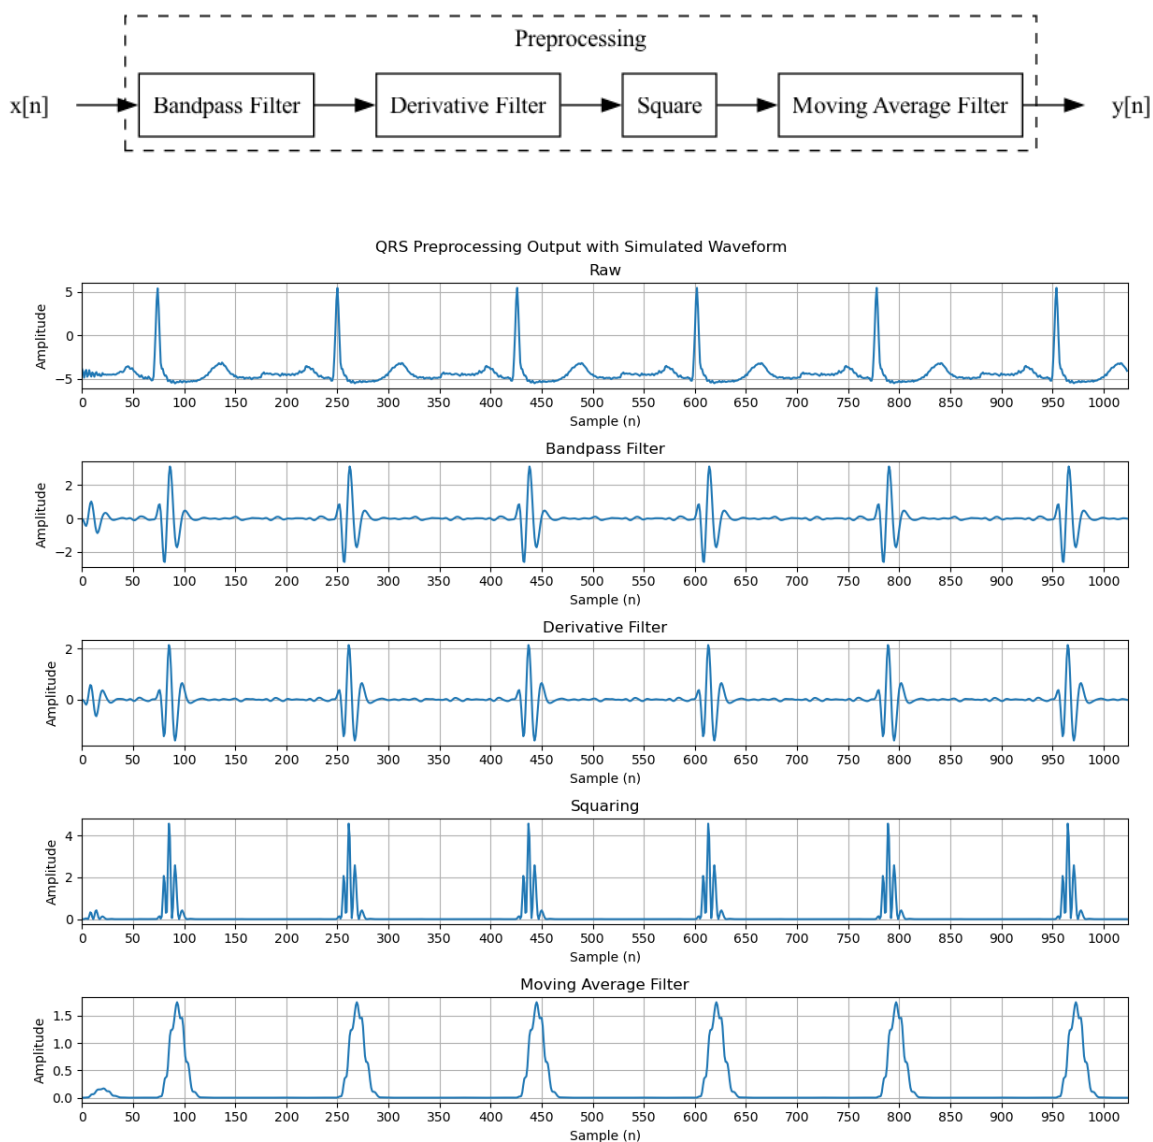


Figure 3 Output of each preprocessing step.

**Note**

The FIR filters are applied in blocks to decrease the amount of memory needed for their state buffers.

**QRS\_applyDecisionRules()**

```
float32_t QRS_applyDecisionRules (
    const float32_t yn[] )
```

Calculate the average heart rate (HR) using predetermined decision rules.

**Precondition**

Preprocess the raw ECG data.

**Parameters**

in	<i>yn</i>	Array of preprocessed ECG signal values.
out	<i>heartRate</i>	Average heart rate in [bpm].

**Postcondition**

Certain information (signal/noise levels, thresholds, etc.) is retained between calls and used to improve further detection.

**Warning**

The current implementation only processes one block at a time and discards the data immediately after, so peaks that are cut off between one block and another might not be being counted.

**See also**

[QRS\\_Preprocess\(\)](#)

**QRS\_runDetection()**

```
float32_t QRS_runDetection (
    const float32_t xn[],
    float32_t yn[] )
```

Run the full algorithm (preprocessing and decision rules) on the inputted ECG data.

This function simply combines the preprocessing and decision rules functions into a single function.

**Parameters**

in	<i>xn</i>	Array of raw ECG signal values.
in	<i>yn</i>	Array used to hold preprocessed ECG signal values.
out	<i>heartRate</i>	Average heart rate in [bpm].

**Postcondition**

`yn` will contain the preprocessed data.

Certain information (signal/noise levels, thresholds, etc.) is retained between calls.

**See also**

[QRS\\_Preprocess\(\)](#), [QRS\\_applyDecisionRules\(\)](#)

**5.1.4.3 Variable Documentation****COEFF\_BANDPASS**

```
const float32_t COEFF_BANDPASS[NUM_COEFF_HIGHPASS] [static]
```

**Initial value:**

```
= {
    0.002937758108600974f, 0.005875516217201948f, 0.002937758108600974f,
    1.0485996007919312f, -0.2961403429508209f,
    1.0f, 2.0f, 1.0f,
    1.3876197338104248f, -0.492422878742218f,
    1.0f, -2.0f, 1.0f,
    1.3209134340286255f, -0.6327387690544128f,
    1.0f, -2.0f, 1.0f,
    1.6299355030059814f, -0.7530401945114136f,
}
```

**COEFF\_DERFILT**

```
const float32_t COEFF_DERFILT[NUM_COEFF_DERFILT] [static]
```

**Initial value:**

```
= {
    -0.125f, -0.25f, 0.0f, 0.25f, 0.125f
}
```

**COEFF\_MOVAVG**

```
const float32_t COEFF_MOVAVG[NUM_COEFF_MOVAVG] [static]
```

**Initial value:**

```
= {
    0.10000000149011612f, 0.10000000149011612f, 0.10000000149011612f,
    0.10000000149011612f, 0.10000000149011612f, 0.10000000149011612f,
    0.10000000149011612f, 0.10000000149011612f, 0.10000000149011612f,
}
```

**5.1.5 Main**

Main program file.

## Files

- file [main.c](#)  
*Main program file.*

## Enumerations

- enum [ISR\\_VECTOR\\_NUMS](#) { [DAQ\\_VECTOR\\_NUM](#) = INT\_ADC0SS3 , [PROC\\_VECTOR\\_NUM](#) = INT\_CAN0 , [LCD\\_VECTOR\\_NUM](#) = INT\_TIMER1A }
- enum [FIFO\\_INFO](#) {  
  [DAQ\\_FIFO\\_CAP](#) = 3 , [DAQ\\_ARRAY\\_LEN](#) = [DAQ\\_FIFO\\_CAP](#) + 1 , [QRS\\_FIFO\\_CAP](#) = [QRS\\_NUM\\_SAMP](#) ,  
  [QRS\\_ARRAY\\_LEN](#) = [QRS\\_FIFO\\_CAP](#) + 1 ,  
  [LCD\\_FIFO\\_1\\_CAP](#) = [DAQ\\_FIFO\\_CAP](#) , [LCD\\_ARRAY\\_1\\_LEN](#) = [LCD\\_FIFO\\_1\\_CAP](#) + 1 , [LCD\\_FIFO\\_2\\_CAP](#) = 1 ,  
  [LCD\\_ARRAY\\_2\\_LEN](#) = [LCD\\_FIFO\\_2\\_CAP](#) + 1 }
- enum [LCD\\_INFO](#) {  
  [LCD\\_TOP\\_LINE](#) = ([LCD\\_Y\\_MAX](#) - 24) , [LCD\\_WAVE\\_NUM\\_Y](#) = [LCD\\_TOP\\_LINE](#) , [LCD\\_WAVE\\_X\\_OFFSET](#) = 0 ,  
  [LCD\\_WAVE\\_Y\\_MIN](#) = (0 + [LCD\\_WAVE\\_X\\_OFFSET](#)) ,  
  [LCD\\_WAVE\\_Y\\_MAX](#) = ([LCD\\_WAVE\\_NUM\\_Y](#) + [LCD\\_WAVE\\_X\\_OFFSET](#)) , [LCD\\_TEXT\\_LINE\\_NUM](#) = 28 ,  
  [LCD\\_TEXT\\_COL\\_NUM](#) = 24 }

## Functions

- static void [DAQ\\_Handler](#) (void)  
*ISR for the data acquisition system.*
- static void [Processing\\_Handler](#) (void)  
*ISR for intermediate processing of the input data.*
- static void [LCD\\_Handler](#) (void)  
*ISR for plotting the waveform and outputting the heart rate to the LCD.*
- int [main](#) (void)  
*Main function for the project.*

## Variables

- static volatile [Fifo\\_t](#) [DAQ\\_Fifo](#) = 0
- static volatile [uint32\\_t](#) [DAQ\\_fifoBuffer](#) [[DAQ\\_ARRAY\\_LEN](#)] = { 0 }
- static volatile [Fifo\\_t](#) [QRS\\_Fifo](#) = 0
- static volatile [uint32\\_t](#) [QRS\\_fifoBuffer](#) [[QRS\\_ARRAY\\_LEN](#)] = { 0 }
- static volatile [Fifo\\_t](#) [LCD\\_Fifo1](#) = 0
- static volatile [uint32\\_t](#) [LCD\\_fifoBuffer1](#) [[LCD\\_ARRAY\\_1\\_LEN](#)] = { 0 }
- static volatile [Fifo\\_t](#) [LCD\\_Fifo2](#) = 0
- static volatile [uint32\\_t](#) [LCD\\_fifoBuffer2](#) [[LCD\\_ARRAY\\_2\\_LEN](#)] = { 0 }
- static volatile bool [qrsBufferIsFull](#) = false  
*flag for QRS detection to start*
- static volatile bool [heartRateIsReady](#) = false  
*flag for LCD to output heart rate*
- static [float32\\_t](#) [QRS\\_processingBuffer](#) [[QRS\\_ARRAY\\_LEN](#)] = { 0 }
- static [uint16\\_t](#) [LCD\\_prevSampleBuffer](#) [[LCD\\_X\\_MAX](#)] = { 0 }

### 5.1.5.1 Detailed Description

Main program file.

### 5.1.5.2 Enumeration Type Documentation

#### ISR\_VECTOR\_NUMS

enum [ISR\\_VECTOR\\_NUMS](#)

**Enumerator**

DAQ_VECTOR_NUM	vector number for the <a href="#">DAQ_Handler()</a>
PROC_VECTOR_NUM	vector number for the <a href="#">Processing_Handler()</a>
LCD_VECTOR_NUM	vector number for the <a href="#">LCD_Handler()</a>

**FIFO\_INFO**

```
enum FIFO_INFO
```

**Enumerator**

DAQ_FIFO_CAP	capacity of DAQ's FIFO buffer
DAQ_ARRAY_LEN	actual size of underlying array
QRS_FIFO_CAP	capacity of QRS detector's FIFO buffer
QRS_ARRAY_LEN	actual size of underlying array
LCD_FIFO_1_CAP	capacity of LCD's waveform FIFO buffer
LCD_ARRAY_1_LEN	actual size of underlying array
LCD_FIFO_2_CAP	capacity of LCD's heart rate FIFO buffer
LCD_ARRAY_2_LEN	actual size of underlying array

**LCD\_INFO**

```
enum LCD_INFO
```

**Enumerator**

LCD_TOP_LINE	separates waveform from text
LCD_WAVE_NUM_Y	num. of y-vals available for plotting waveform
LCD_WAVE_X_OFFSET	waveform's offset from X axis
LCD_WAVE_Y_MIN	waveform's min y-value
LCD_WAVE_Y_MAX	waveform's max y-value
LCD_TEXT_LINE_NUM	line num. of text
LCD_TEXT_COL_NUM	starting col. num. for heart rate

**5.1.5.3 Function Documentation****DAQ\_Handler()**

```
static void DAQ_Handler (
    void ) [static]
```

ISR for the data acquisition system.

This ISR has a priority level of 1, is triggered when the ADC has finished capturing a sample, and also triggers the intermediate processing handler. It reads the 12-bit ADC output, converts it from an integer to a raw voltage sample, and sends it to the processing ISR via the DAQ\_Fifo.

**Precondition**


Initialize the DAQ module.

**Postcondition**

The converted sample is placed in the DAQ FIFO, and the processing ISR is triggered.

**See also**

[DAQ\\_Init\(\)](#), [Processing\\_Handler\(\)](#)

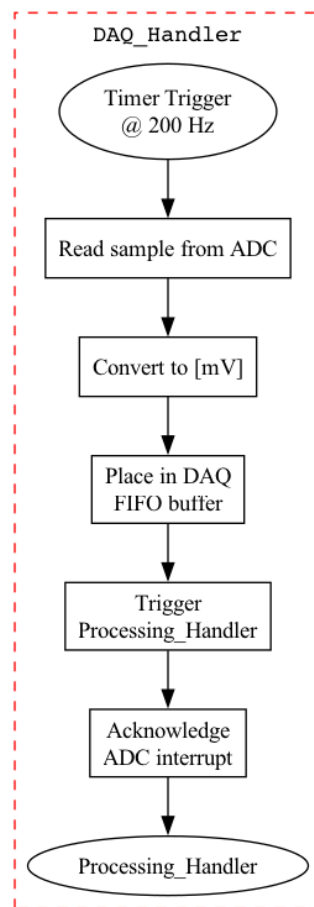

**Figure 4 Flowchart for the DAQ handler.**

**Processing\_Handler()**

```
static void Processing_Handler (
    void ) [static]
```

ISR for intermediate processing of the input data.

This ISR has a priority level of 1, is triggered by the DAQ ISR, and triggers the LCD handler. It removes baseline drift and power line interference (PLI) from a sample, and then moves it to the QRS\_Fifo and the LCD\_Fifo. It also notifies the superloop in [main\(\)](#) when the QRS buffer is full.




**Postcondition**

The converted sample is placed in the LCD FIFO, and the LCD ISR is triggered.

The converted sample is placed in the QRS FIFO, and the flag is set.

**See also**

[DAQ\\_Handler\(\)](#), [main\(\)](#), [LCD\\_Handler\(\)](#)

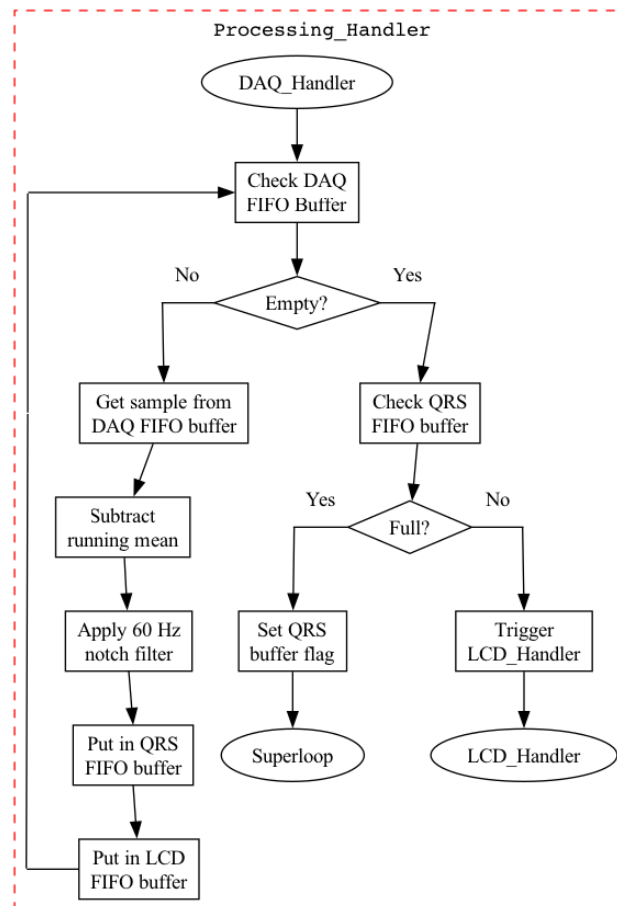

**Figure 5 Flowchart for the processing handler.**

**LCD\_Handler()**

```
static void LCD_Handler (
    void ) [static]
```

ISR for plotting the waveform and outputting the heart rate to the LCD.

This ISR has a priority level of 1 and is triggered by the Processing ISR. It applies a 0.5-40 [Hz] bandpass filter to the sample and plots it. It also outputs the heart rate.

**Precondition**

Initialize the LCD module.


**Postcondition**

The bandpass-filtered sample is plotted to the LCD.

The heart rate is updated after each block is analyzed.

**See also**

[LCD\\_Init\(\)](#), [Processing\\_Handler\(\)](#), [main\(\)](#)

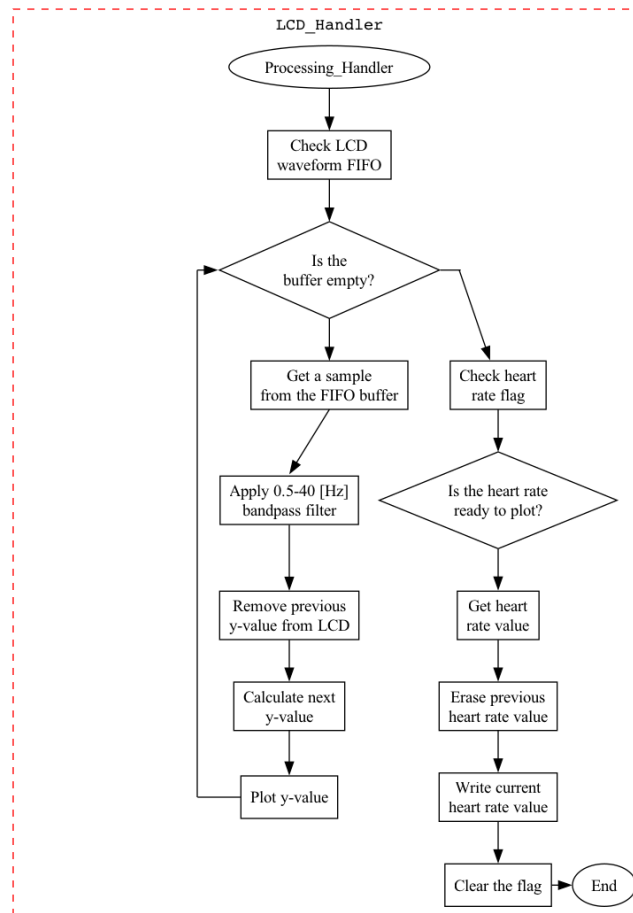


**Figure 6 Flowchart for the LCD handler.**

**main()**

```
int main (
    void )
```

Main function for the project.

Moves the interrupt vector table to RAM; configures and enables the ISRs; initializes all modules and static variables; and performs QRS detection once the buffer has been filled.

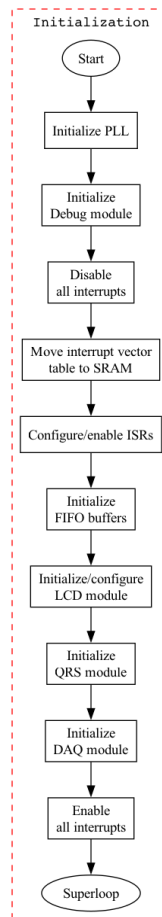

**Figure 7** Flowchart for the initialization phase.


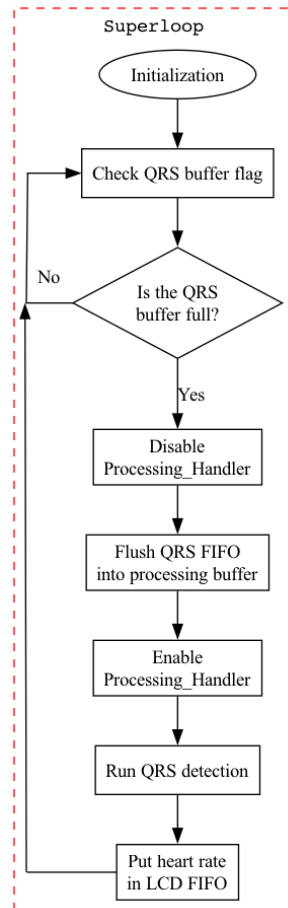


Figure 8 Flowchart for the superloop.


Here is the call graph for this function:

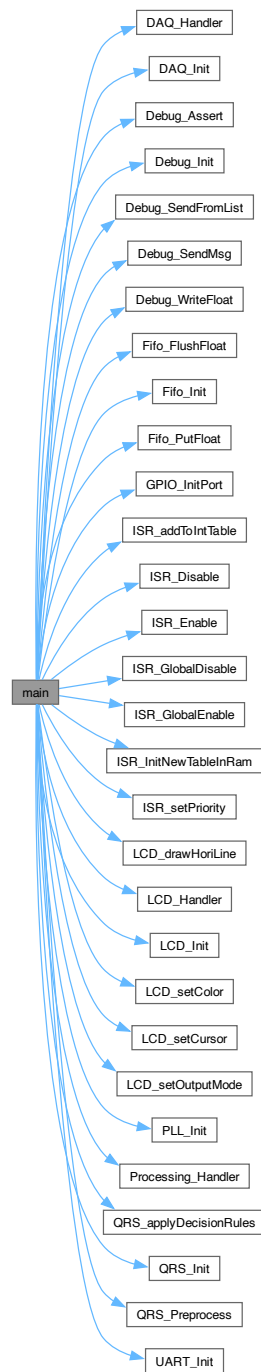

## 5.2 Common

Modules that are used by multiple layers and/or don't fit into any one layer.

Collaboration diagram for Common:

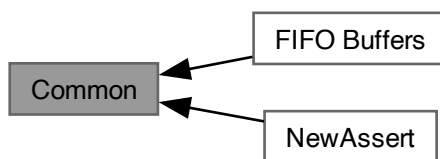

## Modules

- [FIFO Buffers](#)  
*Module for using the "first-in first-out (FIFO) buffer" data structure.*
- [NewAssert](#)  
*Module for using a custom `assert` implementation.*

## Files

- file [NewAssert.c](#)  
*Source code for custom `assert` implementation.*
- file [NewAssert.h](#)  
*Header file for custom `assert` implementation.*

## Functions

- void [Assert](#) (bool condition)  
*Custom `assert` implementation that is more lightweight than the one from `newlib`.*

### 5.2.1 Detailed Description

Modules that are used by multiple layers and/or don't fit into any one layer.

### 5.2.2 Function Documentation

#### **Assert()**

```
void Assert (
    bool condition )
```

Custom `assert` implementation that is more lightweight than the one from `newlib`.

**Parameters**

<code>in</code>	<code>condition</code>	Conditional to test.
-----------------	------------------------	----------------------

**Postcondition**

If `condition == true`, the function simply returns.

If `condition == false`, a breakpoint is initiated.

**5.2.3 FIFO Buffers**

Module for using the "first-in first-out (FIFO) buffer" data structure.

**Files**

- file [Fifo.c](#)  
*Source code for FIFO buffer module.*
- file [Fifo.h](#)  
*Header file for FIFO buffer implementation.*

**Data Structures**

- struct [Fifo\\_t](#)

**Macros**

- `#define FIFO_POOL_SIZE 5`

**Functions**

- `Fifo_t` [Fifo\\_Init](#) (volatile uint32\_t buffer[], const uint32\_t N)  
*Initialize a FIFO buffer of length N.*
- void [Fifo\\_Reset](#) (volatile `Fifo_t` fifo)  
*Reset the FIFO buffer.*

**Variables**

- static `FifoStruct_t` `fifoPool` [FIFO\_POOL\_SIZE] = { 0 }  
*pre-allocated pool*
- static uint8\_t `numFreeFifos` = FIFO\_POOL\_SIZE

## Basic Operations

- void `Fifo_Put` (volatile `Fifo_t` fifo, const `uint32_t` val)  
*Add a value to the end of the buffer.*
- `uint32_t` `Fifo_Get` (volatile `Fifo_t` fifo)  
*Remove the first value of the buffer.*
- void `Fifo_Flush` (volatile `Fifo_t` fifo, `uint32_t` outputBuffer[])  
*Empty the FIFO buffer's contents into an array.*
- void `Fifo_PutFloat` (volatile `Fifo_t` fifo, const `float` val)  
*Add a floating-point value to the end of the buffer.*
- `float` `Fifo_GetFloat` (volatile `Fifo_t` fifo)  
*Remove the first value of the buffer, and cast it to `float`.*
- void `Fifo_FlushFloat` (volatile `Fifo_t` fifo, `float` outputBuffer[])  
*Empty the FIFO buffer into an array of floating-point values.*

## Peeking

- `uint32_t` `Fifo_PeekOne` (volatile `Fifo_t` fifo)  
*See the first element in the FIFO without removing it.*
- void `Fifo_PeekAll` (volatile `Fifo_t` fifo, `uint32_t` outputBuffer[])  
*See the FIFO buffer's contents without removing them.*

## Status Checks

- bool `Fifo_isFull` (volatile `Fifo_t` fifo)  
*Check if the FIFO buffer is full.*
- bool `Fifo_isEmpty` (volatile `Fifo_t` fifo)  
*Check if the FIFO buffer is empty.*
- `uint32_t` `Fifo_getCurrSize` (volatile `Fifo_t` fifo)  
*Get the current size of the FIFO buffer.*

### 5.2.3.1 Detailed Description

Module for using the "first-in first-out (FIFO) buffer" data structure.

### 5.2.3.2 Function Documentation

#### `Fifo_Init()`

```
Fifo_t Fifo_Init (
    volatile uint32_t buffer[],
    const uint32_t N )
```

Initialize a FIFO buffer of length N.

#### Parameters

in	<i>buffer</i>	Array of size N to be used as FIFO buffer
in	<i>N</i>	Length of <i>buffer</i> . Usable length is $N - 1$ .
out	<i>fifo</i>	pointer to the FIFO buffer



**Postcondition**

The number of available FIFO buffers is reduced by 1.

TODO: Add details

**Fifo\_Reset()**

```
void Fifo_Reset (
    volatile Fifo_t fifo )
```

Reset the FIFO buffer.

**Parameters**

in	<i>fifo</i>	Pointer to FIFO buffer.
----	-------------	-------------------------

**Postcondition**

The FIFO is now considered empty. The underlying buffer's contents are not affected.

**Fifo\_Put()**

```
void Fifo_Put (
    volatile Fifo_t fifo,
    const uint32_t val )
```

Add a value to the end of the buffer.

**Parameters**

in	<i>fifo</i>	Pointer to FIFO object
in	<i>val</i>	Value to add to the buffer.

**Postcondition**

If the FIFO is not full, *val* is placed in the buffer. If the FIFO is full, nothing happens.

**See also**

[Fifo\\_PutFloat\(\)](#)

**Fifo\_Get()**

```
uint32_t Fifo_Get (
    volatile Fifo_t fifo )
```

Remove the first value of the buffer.

**Parameters**

in	<i>fifo</i>	Pointer to FIFO object
out	<i>val</i>	First sample in the FIFO.

**Postcondition**

If the FIFO is not empty, the next value is returned. If the FIFO is empty, 0 is returned.

**See also**

[Fifo\\_GetFloat\(\)](#)

**Fifo\_Flush()**

```
void Fifo_Flush (
    volatile Fifo_t fifo,
    uint32_t outputBuffer[] )
```

Empty the FIFO buffer's contents into an array.

**Parameters**

in	<i>fifo</i>	Pointer to source FIFO buffer.
in	<i>outputBuffer</i>	Array to output values to. Should be the same length as the FIFO buffer.

**Postcondition**

The FIFO buffer's contents are transferred to the output buffer.

**See also**

[Fifo\\_FlushFloat\(\)](#)

**Fifo\_PutFloat()**

```
void Fifo_PutFloat (
    volatile Fifo_t fifo,
    const float val )
```

Add a floating-point value to the end of the buffer.

**Parameters**

in	<i>fifo</i>	Pointer to FIFO object
in	<i>val</i>	Value to add to the buffer.

**Postcondition**

If the FIFO is not full, `val` is placed in the buffer. If the FIFO is full, nothing happens.

**Note**

This was added to avoid needing to type-pun floating-point values.

```
// type-punning example
float num = 4.252603;
Fifo_Put(fifo, *((uint32_t *) &num));
Fifo_PutFloat(fifo, num); // same thing, but cleaner
```

**See also**

[Fifo\\_Put\(\)](#)

**Remarks**

To properly use floating-point values, type-punning is necessary.

**Fifo\_GetFloat()**

```
float Fifo_GetFloat (
    volatile Fifo_t fifo )
```

Remove the first value of the buffer, and cast it to `float`.

**Parameters**

in	<i>fifo</i>	Pointer to FIFO object
out	<i>val</i>	First sample in the FIFO.

**Postcondition**

If the FIFO is not empty, the next value is returned. If the FIFO is empty, 0 is returned.

**Note**

This was added to avoid needing to type-pun floating-point values.

```
// type-punning example
float num;
*((uint32_t *) &num) = Fifo_Get(fifo);
num = Fifo_GetFloat(fifo);
```

**See also**

[Fifo\\_Get\(\)](#)

**Remarks**

To properly use floating-point values, type-punning is necessary.

**Fifo\_FlushFloat()**

```
void Fifo_FlushFloat (
    volatile Fifo_t fifo,
    float outputBuffer[] )
```

Empty the FIFO buffer into an array of floating-point values.

**Parameters**

in	<i>fifo</i>	Pointer to source FIFO buffer.
in	<i>outputBuffer</i>	Array to output values to. Should be the same length as the FIFO buffer.

**Postcondition**

The FIFO buffer's contents are transferred to the output buffer.

**Note**

This was added to avoid needing to type-pun floating-point values.

```
// type-punning example
Fifo_Flush(fifo, (uint32_t *) outputBuffer);
Fifo_FlushFloat(fifo, outputBuffer); // same thing, but cleaner
```

**See also**

[Fifo\\_Flush\(\)](#)

**Fifo\_PeekOne()**

```
uint32_t Fifo_PeekOne (
    volatile Fifo_t fifo )
```

See the first element in the FIFO without removing it.

**Parameters**

in	<i>fifo</i>	Pointer to FIFO object
out	<i>val</i>	First sample in the FIFO.

**Fifo\_PeekAll()**

```
void Fifo_PeekAll (
    volatile Fifo_t fifo,
    uint32_t outputBuffer[] )
```

See the FIFO buffer's contents without removing them.

**Parameters**

in	<i>fifo</i>	Pointer to source FIFO buffer.
in	<i>outputBuffer</i>	Array to output values to. Should be the same length as the FIFO buffer.

**Postcondition**

The FIFO buffer's contents are copied to the output buffer.

**Fifo\_isFull()**

```
bool Fifo_isFull (
    volatile Fifo_t fifo )
```

Check if the FIFO buffer is full.

**Parameters**

in	<i>fifo</i>	Pointer to the FIFO buffer.
out	<i>true</i>	The FIFO buffer is full.
out	<i>false</i>	The FIFO buffer is not full.

**Fifo\_isEmpty()**

```
bool Fifo_isEmpty (
    volatile Fifo_t fifo )
```

Check if the FIFO buffer is empty.

**Parameters**

in	<i>fifo</i>	Pointer to the FIFO buffer.
out	<i>true</i>	The FIFO buffer is empty.
out	<i>false</i>	The FIFO buffer is not empty.

**Fifo\_getCurrSize()**

```
uint32_t Fifo_getCurrSize (
    volatile Fifo_t fifo )
```

Get the current size of the FIFO buffer.

**Parameters**

in	<i>fifo</i>	Pointer to the FIFO buffer.
out	<i>size</i>	Current number of values in the FIFO buffer.

#### 5.2.4 NewAssert


Module for using a custom `assert` implementation.

Module for using a custom `assert` implementation.

### 5.3 Middleware

High-level device driver modules.

Collaboration diagram for Middleware:

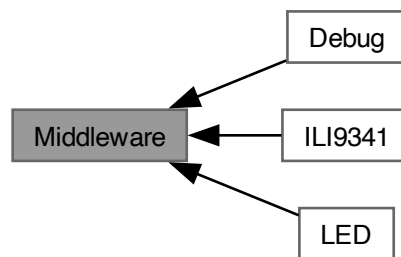

#### Modules

- [Debug](#)  
*Module for debugging functions, including serial output and assertions.*
- [ILI9341](#)  
*Functions for interfacing an ILI9341-based 240RGBx320 LCD via [Serial Peripheral Interface \(SPI\)](#).*
- [LED](#)  
*Functions for driving light-emitting diodes (LEDs) via [General-Purpose Input/Output \(GPIO\)](#).*

#### 5.3.1 Detailed Description

High-level device driver modules.

These modules contain functions for interfacing with external devices/peripherals using low-level drivers.

#### 5.3.2 Debug

Module for debugging functions, including serial output and assertions.

## Files

- file [Debug.c](#)  
*Source code for Debug module.*
- file [Debug.h](#)  
*Header file for Debug module.*

## Variables

- static Uart\_t **debugUart** = 0

## Serial Output

- enum **Msg\_t** { **DEBUG\_DAQ\_INIT** , **DEBUG\_QRS\_INIT** , **DEBUG\_LCD\_INIT** , **DEBUG\_QRS\_START** }
- void [Debug\\_SendMsg](#) (void \*message)  
*Send a message to the serial port.*
- void [Debug\\_SendFromList](#) (Msg\_t msg)  
*Send a message from the message list.*
- void [Debug\\_WriteFloat](#) (double value)  
*Write a floating-point value to the serial port.*

## Initialization

- void [Debug\\_Init](#) (Uart\_t uart)  
*Initialize the Debug module.*

## Assertions

- void [Debug\\_Assert](#) (bool condition)  
*Stops program if `condition` is `true`. Useful for bug detection during debugging.*

### 5.3.2.1 Detailed Description

Module for debugging functions, including serial output and assertions.

### 5.3.2.2 Function Documentation

#### Debug\_Init()

```
void Debug_Init (  
    Uart_t uart )
```

Initialize the Debug module.

#### Precondition

Initialize the UART.

**Parameters**

<code>in</code>	<code>uart</code>	UART to use for serial output.
-----------------	-------------------	--------------------------------

**Postcondition**

An initialization message is sent to the serial port.

**See also**

[UART\\_Init\(\)](#)

**Debug\_SendMsg()**

```
void Debug_SendMsg (
    void * message )
```

Send a message to the serial port.

**Precondition**

Initialize the Debug module.

**Parameters**

<code>message</code>	(Pointer to) array of ASCII characters.
----------------------	---

**Postcondition**

A floating point value is written to the serial port.

**See also**

[Debug\\_SendMsg\(\)](#)

**Debug\_SendFromList()**

```
void Debug_SendFromList (
    Msg_t msg )
```

Send a message from the message list.

**Precondition**

Initialize the Debug module.



**Parameters**

<i>in</i>	<i>msg</i>	An entry from the enumeration.
-----------	------------	--------------------------------

**Postcondition**

The corresponding message is sent to the serial port.

**See also**

[Debug\\_SendMsg\(\)](#)

**Debug\_WriteFloat()**

```
void Debug_WriteFloat (
    double value )
```

Write a floating-point value to the serial port.

**Precondition**

Initialize the Debug module.

**Parameters**

<i>in</i>	<i>value</i>	Floating-point value.
-----------	--------------	-----------------------

**Postcondition**

A floating point value is written to the serial port.

**See also**

[Debug\\_SendMsg\(\)](#)

**Debug\_Assert()**

```
void Debug_Assert (
    bool condition )
```

Stops program if `condition` is `true`. Useful for bug detection during debugging.

**Precondition**

Initialize the Debug module.

## Parameters

<code>in</code>	<code>condition</code>	Conditional statement to evaluate.
-----------------	------------------------	------------------------------------

## Postcondition

If `condition == true`, the program continues normally. If `condition == false`, a message is sent and a breakpoint is activated.

## 5.3.3 ILI9341

Functions for interfacing an ILI9341-based 240RGBx320 LCD via [Serial Peripheral Interface \(SPI\)](#).

## Files

- file [ILI9341.c](#)  
*Source code for ILI9341 module.*
- file [ILI9341.h](#)  
*Driver module for interfacing with an ILI9341 LCD driver.*

## Enumerations

- enum { [ILI9341\\_NUM\\_COLS](#) = 240 , [ILI9341\\_NUM\\_ROWS](#) = 320 }
- enum [Cmd\\_t](#) {  
[NOP](#) = 0x00 , [SWRESET](#) = 0x01 , [SPLIN](#) = 0x10 , [SPLOUT](#) = 0x11 ,  
[PTLON](#) = 0x12 , [NORON](#) = 0x13 , [DINVOFF](#) = 0x20 , [DINVON](#) = 0x21 ,  
[CASET](#) = 0x2A , [PASET](#) = 0x2B , [RAMWR](#) = 0x2C , [DISPOFF](#) = 0x28 ,  
[DISPON](#) = 0x29 , [PLTAR](#) = 0x30 , [VSCRDEF](#) = 0x33 , [MADCTL](#) = 0x36 ,  
[VSCRSAADD](#) = 0x37 , [IDMOFF](#) = 0x38 , [IDMON](#) = 0x39 , [PIXSET](#) = 0x3A ,  
[FRMCTR1](#) = 0xB1 , [FRMCTR2](#) = 0xB2 , [FRMCTR3](#) = 0xB3 , [PRCTR](#) = 0xB5 ,  
[IFCTL](#) = 0xF6 }
- enum [sleepMode\\_t](#) { [SLEEP\\_ON](#) = [SPLIN](#) , [SLEEP\\_OFF](#) = [SPLOUT](#) }
- enum [displayArea\\_t](#) { [NORMAL\\_AREA](#) = [NORON](#) , [PARTIAL\\_AREA](#) = [PTLON](#) }
- enum [colorExpr\\_t](#) { [FULL\\_COLORS](#) = [IDMOFF](#) , [PARTIAL\\_COLORS](#) = [IDMON](#) }
- enum [invertMode\\_t](#) { [INVERT\\_ON](#) = [DINVON](#) , [INVERT\\_OFF](#) = [DINVOFF](#) }
- enum [outputMode\\_t](#) { [OUTPUT\\_ON](#) = [DISPON](#) , [OUTPUT\\_OFF](#) = [DISPOFF](#) }
- enum [colorDepth\\_t](#) { [COLORDEPTH\\_16BIT](#) = 0x55 , [COLORDEPTH\\_18BIT](#) = 0x66 }

## Functions

- static void [ILI9341\\_setMode](#) (uint8\_t param)
- static void [ILI9341\\_setAddress](#) (uint16\_t start\_address, uint16\_t end\_address, bool is\_row)
- static void [ILI9341\\_sendParams](#) ([Cmd\\_t](#) cmd)  
*Send a command and/or the data within the FIFO buffer. A command is only sent when `cmd != NOP` (where `NOP = 0`). Data is only sent if the FIFO buffer is not empty.*
- void [ILI9341\\_Init](#) (GpioPort\_t resetPinPort, GpioPin\_t resetPin, Spi\_t spi, Timer\_t timer)  
*Initialize the LCD driver.*
- void [ILI9341\\_setInterface](#) (void)  
*Sets the interface for the ILI9341.*
- void [ILI9341\\_resetHard](#) (Timer\_t timer)

- *Perform a hardware reset of the LCD driver.*
- void [ILI9341\\_resetSoft](#) (Timer\_t timer)
- *Perform a software reset of the LCD driver.*
- void [ILI9341\\_setSleepMode](#) (sleepMode\_t sleepMode, Timer\_t timer)
- *Enter or exit sleep mode (ON by default).*
- void [ILI9341\\_setDisplayArea](#) (displayArea\_t displayArea)
- *Set the display area.*
- void [ILI9341\\_setColorExpression](#) (colorExpr\_t colorExpr)
- *Set the color expression (FULL\_COLORS by default).*
- void [ILI9341\\_setPartialArea](#) (uint16\_t rowStart, uint16\_t rowEnd)
- *Set the display area for partial mode. Call before activating partial mode.*
- void [ILI9341\\_setDispInversion](#) (invertMode\_t invertMode)
- *Toggle display inversion (OFF by default).*
- void [ILI9341\\_setDispOutput](#) (outputMode\_t outputMode)
- *Change whether the IC is outputting to the display for not.*
- void [ILI9341\\_setMemAccessCtrl](#) (bool areRowsFlipped, bool areColsFlipped, bool areRowsAndColsSwitched, bool isVertRefreshFlipped, bool isColorOrderFlipped, bool isHorRefreshFlipped)
- *Set how data is converted from memory to display.*
- void [ILI9341\\_setColorDepth](#) (colorDepth\_t colorDepth)
- *Set the color depth for the display.*
- void [ILI9341\\_setFrameRate](#) (uint8\_t divisionRatio, uint8\_t clocksPerLine)
- *TODO: Write brief.*
- void [ILI9341\\_setRowAddress](#) (uint16\_t startRow, uint16\_t endRow)
- *Sets the start/end rows to be written to.*
- void [ILI9341\\_setColAddress](#) (uint16\_t startCol, uint16\_t endCol)
- *Sets the start/end columns to be written to.*
- void [ILI9341\\_writeMemCmd](#) (void)
- *Signal to the driver that pixel data is incoming and should be written to memory.*
- void [ILI9341\\_writePixel](#) (uint8\_t red, uint8\_t green, uint8\_t blue)
- *Write a single pixel to frame memory.*

## Variables

- static uint32\_t **ILI9341\_Buffer** [8]
- static Fifo\_t **ILI9341\_Fifo**
- struct {
  - sleepMode\_t **sleepMode**
  - displayArea\_t **displayArea**
  - colorExpr\_t **colorExpression**
  - invertMode\_t **invertMode**
  - outputMode\_t **outputMode**
  - colorDepth\_t **colorDepth**
  - volatile uint32\_t \* **resetPinDataRegister**
  - GpioPin\_t **resetPin**
  - Spi\_t **spi**
  - bool **isInit**

} [ili9341](#)

### 5.3.3.1 Detailed Description

Functions for interfacing an ILI9341-based 240RGBx320 LCD via [Serial Peripheral Interface \(SPI\)](#).

### 5.3.3.2 Enumeration Type Documentation

#### anonymous enum

anonymous enum

##### Enumerator

ILI9341_NUM_COLS	<b>5.3.3.3 of columns available on the display</b>
ILI9341_NUM_ROWS	<b>5.3.3.4 of rows available on the display</b>

#### Cmd\_t

enum [Cmd\\_t](#)

##### Enumerator

NOP	No Operation.
SWRESET	Software Reset.
SPLIN	Enter Sleep Mode.
SPLOUT	Sleep Out (i.e. Exit Sleep Mode)
PTLON	Partial Display Mode ON.
NORON	Normal Display Mode ON.
DINVOFF	Display Inversion OFF.
DINVON	Display Inversion ON.
CASET	Column Address Set.
PASET	Page Address Set.
RAMWR	Memory Write.
DISPOFF	Display OFF.
DISPON	Display ON.
PLTAR	Partial Area.
VSCRDEF	Vertical Scrolling Definition.
MADCTL	Memory Access Control.
VSCRSADD	Vertical Scrolling Start Address.
IDMOFF	Idle Mode OFF.
IDMON	Idle Mode ON.
PIXSET	Pixel Format Set.
FRMCTR1	Frame Rate Control Set (Normal Mode)
FRMCTR2	Frame Rate Control Set (Idle Mode)
FRMCTR3	Frame Rate Control Set (Partial Mode)
PRCTR	Blanking Porch Control.
IFCTL	Interface Control.

### 5.3.3.5 Function Documentation

#### ILI9341\_setMode()

```
static void ILI9341_setMode (
    uint8_t param ) [static]
```

This function simply groups each of the configuration functions into one to reduce code duplication.

#### ILI9341\_setAddress()

```
static void ILI9341_setAddress (
    uint16_t start_address,
    uint16_t end_address,
    bool is_row ) [static]
```

This function implements the "Column Address Set" (CASET) and "Page Address Set" (PASET) commands from p. 110-113 of the ILI9341 datasheet.

The input parameters represent the first and last addresses to be written to when [ILI9341\\_writePixel\(\)](#) is called.

To work correctly, `startAddress` must be no greater than `endAddress`, and `endAddress` cannot be greater than the max number of rows/columns.

#### ILI9341\_sendParams()

```
static void ILI9341_sendParams (
    Cmd_t cmd ) [static]
```

Send a command and/or the data within the FIFO buffer. A command is only sent when `cmd != NOP` (where `NOP = 0`). Data is only sent if the FIFO buffer is not empty.

##### Parameters

in	<i>cmd</i>	Command to send.
----	------------	------------------

#### ILI9341\_Init()

```
void ILI9341_Init (
    GpioPort_t resetPinPort,
    GpioPin_t resetPin,
    Spi_t spi,
    Timer_t timer )
```

Initialize the LCD driver.

**Precondition**

Initialize the GPIO port.  
Initialize the SPI module.  
Initialize the Timer.

**Parameters**

in	<i>resetPinPort</i>	The GPIO port that the <code>RESET</code> pin belongs to.
in	<i>resetPin</i>	The GPIO pin used as the <code>RESET</code> pin.
in	<i>spi</i>	The SPI module to use for communication.
in	<i>timer</i>	The hardware timer to use during initialization.

**Postcondition**

The `RESET` is configured as a digital `OUTPUT` pin.

The SPI is configured and enabled.

The LCD driver is initialized and ready to accept commands.

**See also**

[GPIO\\_InitPort\(\)](#), [SPI\\_Init\(\)](#), [Timer\\_Init\(\)](#)

**ILI9341\_setInterface()**

```
void ILI9341_setInterface (
    void )
```

Sets the interface for the ILI9341.

The parameters for this command are hard-coded, so it only needs to be called once upon initialization.

This function implements the "Interface Control" (`IFCTL`) command from p. 192-194 of the ILI9341 datasheet, which controls how the LCD driver handles 16-bit data and what interfaces (internal or external) are used.

Name	Bit #	Param #	Effect when set = 1
MY_EOR	7	0	flips value of corresponding MADCTL bit
MX_EOR	6		flips value of corresponding MADCTL bit
MV_EOR	5		flips value of corresponding MADCTL bit
BGR_EOR	3		flips value of corresponding MADCTL bit
WEMODE	0		overflowing pixel data is not ignored
EPF[1:0]	5:4	1	controls 16 to 18-bit pixel data conversion
MDT[1:0]	1:0		controls display data transfer method
ENDIAN	5	2	host sends LSB first
DM[1:0]	3:2		selects display operation mode
RM	1		selects GRAM interface mode
RIM	0		specifies RGB interface-specific details

The first param's bits are cleared so that the corresponding MADCTL bits (`ILI9341_setMemoryAccessCtrl()`) are unaffected and overflowing pixel data is ignored. The EPF bits are cleared so that the LSB of the R and B values is copied from the MSB when using 16-bit color depth. The TM4C123 sends the MSB first, so the `ENDIAN` bit is cleared. The other bits are cleared and/or irrelevant since the RGB and VSYNC interfaces aren't used.

**ILI9341\_resetHard()**

```
void ILI9341_resetHard (
    Timer_t timer )
```

Perform a hardware reset of the LCD driver.

**Parameters**

in	<i>timer</i>	Hardware timer to use during reset.
----	--------------	-------------------------------------

The LCD driver's RESET pin requires a negative logic (i.e. active LOW) signal for  $\geq 10$  [us] and an additional 5 [ms] before further commands can be sent.

**ILI9341\_resetSoft()**

```
void ILI9341_resetSoft (
    Timer_t timer )
```

Perform a software reset of the LCD driver.

**Parameters**

in	<i>timer</i>	Hardware timer to use during reset.
----	--------------	-------------------------------------

the driver needs 5 [ms] before another command

**ILI9341\_setSleepMode()**

```
void ILI9341_setSleepMode (
    sleepMode_t sleepMode,
    Timer_t timer )
```

Enter or exit sleep mode (ON by default).

**Parameters**

in	<i>sleepMode</i>	SLEEP_ON or SLEEP_OFF
in	<i>timer</i>	Hardware timer to use for a slight delay after the mode change.

**Postcondition**

The IC will be in or out of sleep mode depending on the value of *sleepMode*.

The MCU must wait  $\geq 5$  [ms] before sending further commands regardless of the selected mode.

It's also necessary to wait 120 [ms] before sending `SPL_OUT` after sending `SPL_IN` or a reset, so this function waits 120 [ms] regardless of the preceding event.



**ILI9341\_setDisplayArea()**

```
void ILI9341_setDisplayArea (
    displayArea_t displayArea )
```

Set the display area.

**Precondition**

If using partial mode, set the partial area first.

**Parameters**

in	<i>displayArea</i>	NORMAL_AREA or PARTIAL_AREA
----	--------------------	-----------------------------

**See also**

[ILI9341\\_setPartialArea\(\)](#)

**ILI9341\_setColorExpression()**

```
void ILI9341_setColorExpression (
    colorExpr_t colorExpr )
```

Set the color expression (FULL\_COLORS by default).

**Parameters**

in	<i>colorExpr</i>	FULL_COLORS or PARTIAL_COLORS
----	------------------	-------------------------------

**Postcondition**

With partial color expression, the display only uses 8 colors. Otherwise, the color depth determines the number of colors available.

**ILI9341\_setPartialArea()**

```
void ILI9341_setPartialArea (
    uint16_t rowStart,
    uint16_t rowEnd )
```

Set the display area for partial mode. Call before activating partial mode.

**Parameters**

in	<i>rowStart</i>	
in	<i>rowEnd</i>	

See also

[ILI9341\\_setDisplayArea\(\)](#)

### ILI9341\_setDispInversion()

```
void ILI9341_setDispInversion (
    invertMode_t invertMode )
```

Toggle display inversion (OFF by default).

#### Parameters

in	<i>invertMode</i>	INVERT_ON or INVERT_OFF
----	-------------------	-------------------------

#### Postcondition

When inversion is ON, the display colors are inverted. (e.g. BLACK -> WHITE, GREEN -> PURPLE)

### ILI9341\_setDispOutput()

```
void ILI9341_setDispOutput (
    outputMode_t outputMode )
```

Change whether the IC is outputting to the display for not.

#### Parameters

in	<i>outputMode</i>	OUTPUT_ON or OUTPUT_OFF
----	-------------------	-------------------------

#### Postcondition

If ON, the IC outputs data from its memory to the display. If OFF, the display is cleared and the IC stops outputting data.

TODO: Write description

### ILI9341\_setMemAccessCtrl()

```
void ILI9341_setMemAccessCtrl (
    bool areRowsFlipped,
    bool areColsFlipped,
    bool areRowsAndColsSwitched,
    bool isVertRefreshFlipped,
    bool isColorOrderFlipped,
    bool isHorRefreshFlipped )
```

Set how data is converted from memory to display.

**Parameters**

in	<i>areRowsFlipped</i>	
in	<i>areColsFlipped</i>	
in	<i>areRowsAndColsSwitched</i>	
in	<i>isVertRefreshFlipped</i>	
in	<i>isColorOrderFlipped</i>	
in	<i>isHorRefreshFlipped</i>	

This function implements the "Memory Access Control" (MADCTL) command from p. 127-128 of the ILI9341 datasheet, which controls how the LCD driver displays data upon writing to memory.

Name	Bit #	Effect when set = 1
MY	7	flip row (AKA "page") addresses
MX	6	flip column addresses
MV	5	exchange rows and column addresses
ML	4	reverse horizontal refresh order
BGR	3	reverse color input order (RGB -> BGR)
MH	2	reverse vertical refresh order

All bits are clear after powering on or HWRESET.

**ILI9341\_setColorDepth()**

```
void ILI9341_setColorDepth (
    colorDepth_t colorDepth )
```

Set the color depth for the display.

**Parameters**

in	<i>colorDepth</i>	COLORDEPTH_16BIT or COLORDEPTH_18BIT
----	-------------------	--------------------------------------

**Postcondition**

16BIT mode allows for ~65K ( $2^{16}$ ) colors and requires 2 transfers. 18BIT mode allows for ~262K ( $2^{18}$ ) colors but requires 3 transfers.

**ILI9341\_setFrameRate()**

```
void ILI9341_setFrameRate (
    uint8_t divisionRatio,
    uint8_t clocksPerLine )
```

TODO: Write brief.

TODO: Write description

**ILI9341\_setRowAddress()**

```
void ILI9341_setRowAddress (
    uint16_t startRow,
    uint16_t endRow )
```

Sets the start/end rows to be written to.

**Parameters**

in		
----	--	--

$0 \leq \text{startRow} \leq \text{endRow}$

**Parameters**

in		
----	--	--

$\text{startRow} \leq \text{endRow} \leq 240$

**See also**

[ILI9341\\_setRowAddress](#), [ILI9341\\_writePixel\(\)](#)

This function is simply an interface to [ILI9341\\_setAddress\(\)](#). To work correctly, `start_row` must be no greater than `end_row`, and `end_row` cannot be greater than the max row number (default 320).

**ILI9341\_setColAddress()**

```
void ILI9341_setColAddress (
    uint16_t startCol,
    uint16_t endCol )
```

Sets the start/end columns to be written to.

**Parameters**

in		
----	--	--

$0 \leq \text{startCol} \leq \text{endCol}$

**Parameters**

in		
----	--	--

$\text{startCol} \leq \text{endCol} \leq 240$

**See also**

[ILI9341\\_setColAddress](#), [ILI9341\\_writePixel\(\)](#)

This function is simply an interface to [ILI9341\\_setAddress\(\)](#). To work correctly, `start_col` must be no greater than `end_col`, and `end_col` cannot be greater than the max column number (default 240).

### ILI9341\_writeMemCmd()

```
void ILI9341_writeMemCmd (
    void )
```

Signal to the driver that pixel data is incoming and should be written to memory.

#### Precondition

Set the row and/or column addresses.

#### Postcondition

The LCD driver is ready to accept pixel data.

#### See also

[ILI9341\\_setRowAddress](#), [ILI9341\\_setColAddress\(\)](#), [ILI9341\\_writePixel\(\)](#)

### ILI9341\_writePixel()

```
void ILI9341_writePixel (
    uint8_t red,
    uint8_t green,
    uint8_t blue )
```

Write a single pixel to frame memory.

#### Precondition

Send the "Write Memory" command.

Set the desired color depth for the display.

#### Parameters

in	<i>red</i>	5 or 6-bit R value
in	<i>green</i>	5 or 6-bit G value
in	<i>blue</i>	5 or 6-bit B value

#### See also

[ILI9341\\_setColorDepth](#), [ILI9341\\_writeMemCmd\(\)](#), [ILI9341\\_writePixel\(\)](#)

This function sends one pixel to the display. Because the serial interface (SPI) is used, each pixel requires 2 transfers in 16-bit mode and 3 transfers in 18-bit mode.

The following table (adapted from p. 63 of the datasheet) visualizes how the RGB data is sent to the display when using 16-bit color depth.

Transfer	1								2							
Bit #	7	6	5	4	3	2	1	0	7	6	5	4	3	2	1	0
Value	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B4	B3	B2	B1	B0

The following table (adapted from p. 64 of the datasheet) visualizes how the RGB data is sent to the display when using 18-bit color depth.

Transfer	1									2		
Bit #	7	6	5	4	3	2	1	0		7	6	...
Value	R5	R4	R3	R2	R1	R0	0/1	0/1		G5	G4	...

### 5.3.3.6 Variable Documentation

#### [struct]

```
struct { ... } ili9341 [static]
```

#### Initial value:

```
= { SLEEP_ON,          NORMAL_AREA, FULL_COLORS, INVERT_OFF, OUTPUT_ON,
    COLORDEPTH_16BIT, 0,          0,          0,          false }
```

## 5.3.4 LED

Functions for driving light-emitting diodes (LEDs) via [General-Purpose Input/Output \(GPIO\)](#).

### Files

- file [Led.c](#)  
*Source code for LED module.*
- file [Led.h](#)  
*Interface for LED module.*

### Data Structures

- struct [Led\\_t](#)

### Macros

- `#define LED_POOL_SIZE 1`

### Variables

- static [LedStruct\\_t](#) `Led_ObjPool` [`LED_POOL_SIZE`] = { 0 }
- static uint8\_t `num_free_leds` = `LED_POOL_SIZE`

## Initialization & Configuration

- `Led_t` [Led\\_Init](#) (`GpioPort_t` gpioPort, `GpioPin_t` pin)  
*Initialize a light-emitting diode (LED) as an `Led_t`.*
- `GpioPort_t` [Led\\_GetPort](#) (`Led_t` led)  
*Get the GPIO port associated with the LED.*
- `GpioPin_t` [Led\\_GetPin](#) (`Led_t` led)  
*Get the GPIO pin associated with the LED.*

## Status Checking

- `bool` [Led\\_isInit](#) (`Led_t` led)  
*Check if an LED is initialized.*
- `bool` [Led\\_isOn](#) (`Led_t` led)  
*Check the LED's status.*

## Operations

- `void` [Led\\_TurnOn](#) (`Led_t` led)  
*Turn an LED ON.*
- `void` [Led\\_TurnOff](#) (`Led_t` led)  
*Turn an LED OFF.*
- `void` [Led\\_Toggle](#) (`Led_t` led)  
*Toggle an LED.*

### 5.3.4.1 Detailed Description

Functions for driving light-emitting diodes (LEDs) via [General-Purpose Input/Output \(GPIO\)](#).

### 5.3.4.2 Function Documentation

#### Led\_Init()

```
Led_t Led_Init (  
    GpioPort_t gpioPort,  
    GpioPin_t pin )
```

Initialize a light-emitting diode (LED) as an `Led_t`.

#### Parameters

in	<i>gpioPort</i>	Pointer to a <code>struct</code> representing a GPIO port.
in	<i>pin</i>	GPIO pin to use.
out	<i>led</i>	Pointer to LED data structure.

### Led\_GetPort()

```
GpioPort_t Led_GetPort (
    Led_t led )
```

Get the GPIO port associated with the LED.

#### Precondition

Initialize the LED.

#### Parameters

in	<i>led</i>	Pointer to LED data structure.
out	<i>gpioPort</i>	Pointer to a GPIO port data structure.

#### See also

[Led\\_Init\(\)](#), [Led\\_GetPin\(\)](#)

### Led\_GetPin()

```
GpioPin_t Led_GetPin (
    Led_t led )
```

Get the GPIO pin associated with the LED.

#### Precondition

Initialize the LED.

#### Parameters

in	<i>led</i>	Pointer to LED data structure.
out	<i>pin</i>	GPIO pin associated with the LED.

#### See also

[Led\\_Init\(\)](#), [Led\\_GetPort\(\)](#)

### Led\_isInit()

```
bool Led_isInit (
    Led_t led )
```

Check if an LED is initialized.



**Parameters**

in	<i>led</i>	Pointer to LED data structure.
out	<i>true</i>	The LED is initialized.
out	<i>false</i>	The LED is not initialized.

**See also**[Led\\_Init\(\)](#)**Led\_isOn()**

```
bool Led_isOn (
    Led_t led )
```

Check the LED's status.

**Precondition**

Initialize the LED.

**Parameters**

in	<i>led</i>	Pointer to LED data structure.
out	<i>true</i>	the LED is ON.
out	<i>false</i>	the LED is OFF.

**See also**[Led\\_TurnOn\(\)](#), [Led\\_TurnOff\(\)](#), [Led\\_Toggle\(\)](#)**Led\_TurnOn()**

```
void Led_TurnOn (
    Led_t led )
```

Turn an LED ON.

**Precondition**

Initialize the LED.

**Parameters**

in	<i>led</i>	Pointer to LED data structure.
----	------------	--------------------------------

**Postcondition**

The LED is turned ON.

**See also**

[Led\\_TurnOff\(\)](#), [Led\\_Toggle\(\)](#)

**Led\_TurnOff()**

```
void Led_TurnOff (
    Led_t led )
```

Turn an LED OFF.

**Precondition**

Initialize the LED.

**Parameters**

in	<i>led</i>	Pointer to LED data structure.
----	------------	--------------------------------

**Postcondition**

The LED is turned OFF.

**See also**

[Led\\_TurnOn\(\)](#), [Led\\_Toggle\(\)](#)

**Led\_Toggle()**

```
void Led_Toggle (
    Led_t led )
```

Toggle an LED.

**Precondition**

Initialize the LED.

**Parameters**

in	<i>led</i>	Pointer to LED data structure.
----	------------	--------------------------------

**Postcondition**

The LED's state is flipped (i.e. ON -> OFF or OFF -> ON).


**See also**

[Led\\_TurnOn\(\)](#), [Led\\_TurnOff\(\)](#)

## 5.4 Device Drivers

Low level device driver modules.

Collaboration diagram for Device Drivers:

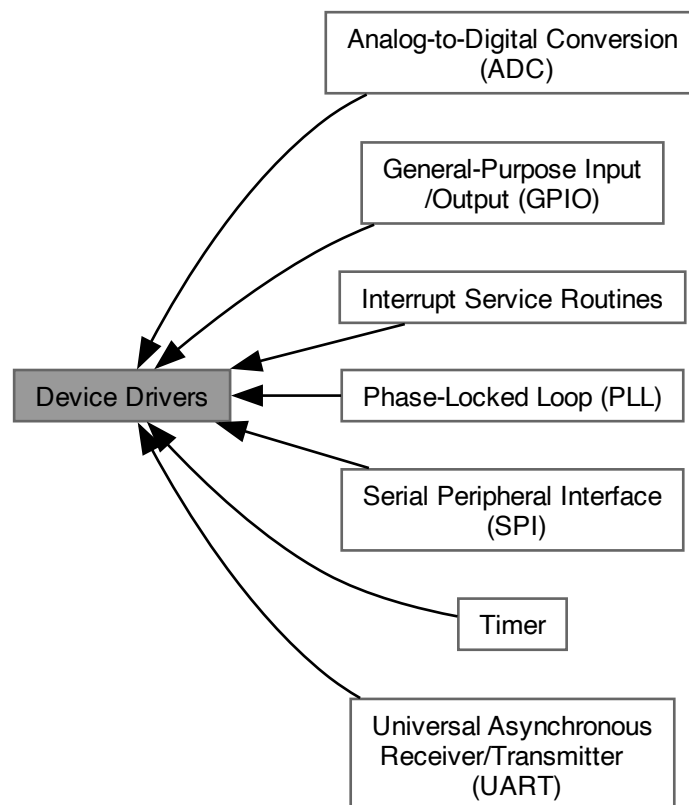**Modules**

- [Analog-to-Digital Conversion \(ADC\)](#)  
*Functions for analog-to-digital conversion.*
- [General-Purpose Input/Output \(GPIO\)](#)  
*Functions for using GPIO ports.*
- [Phase-Locked Loop \(PLL\)](#)

- Function for initializing the phase-locked loop.*
- [Serial Peripheral Interface \(SPI\)](#)
  - Functions for SPI-based communication via the SSI peripheral.*
- [Timer](#)
  - Functions for using hardware timers.*
- [Universal Asynchronous Receiver/Transmitter \(UART\)](#)
  - Functions for serial communication via the UART peripheral.*
- [Interrupt Service Routines](#)
  - Functions for manipulating the interrupt vector table and setting up interrupt handlers via the NVIC.*

#### 5.4.1 Detailed Description

Low level device driver modules.

These modules contain functions for interfacing with the TM4C123 microcontroller's built-in peripherals.

#### 5.4.2 Analog-to-Digital Conversion (ADC)

Functions for analog-to-digital conversion.

##### Files

- file [ADC.c](#)
  - Source code for analog-to-digital conversion (ADC) module.*
- file [ADC.h](#)
  - Header file for analog-to-digital conversion (ADC) module.*

##### Functions

- void [ADC\\_Init](#) (void)
  - Initialize ADC0 as a single-input analog-to-digital converter.*

##### 5.4.2.1 Detailed Description

Functions for analog-to-digital conversion.

##### 5.4.2.2 Function Documentation

###### ADC\_Init()

```
void ADC_Init (
    void )
```

Initialize ADC0 as a single-input analog-to-digital converter.

###### Postcondition

Analog input 8 (Ain8) – AKA GPIO pin PE5 – captures samples when triggered by one of the hardware timers, and initiates an interrupt once sample capture is complete.

### 5.4.3 General-Purpose Input/Output (GPIO)

Functions for using GPIO ports.

#### Files

- file [GPIO.c](#)  
*Source code for GPIO module.*
- file [GPIO.h](#)  
*Header file for general-purpose input/output (GPIO) device driver.*

#### Data Structures

- struct [GpioPort\\_t](#)

#### Macros

- `#define GPIO_NUM_PORTS 6`

#### Enumerations

- enum [GPIO\\_PORT\\_BASE\\_ADDRESSES](#) {  
[GPIO\\_PORTA\\_BASE\\_ADDRESS](#) = (uint32\_t) 0x40004000 , [GPIO\\_PORTB\\_BASE\\_ADDRESS](#) = (uint32\_t) 0x40005000 , [GPIO\\_PORTC\\_BASE\\_ADDRESS](#) = (uint32\_t) 0x40006000 , [GPIO\\_PORTD\\_BASE\\_ADDRESS](#) = (uint32\_t) 0x40007000 ,  
[GPIO\\_PORTE\\_BASE\\_ADDRESS](#) = (uint32\_t) 0x40024000 , [GPIO\\_PORTF\\_BASE\\_ADDRESS](#) = (uint32\_t) 0x40025000 }
- enum [GPIO\\_REGISTER\\_OFFSETS](#) {  
[GPIO\\_DATA\\_R\\_OFFSET](#) = (uint32\_t) 0x03FC , [GPIO\\_DIR\\_R\\_OFFSET](#) = (uint32\_t) 0x0400 , [GPIO\\_IS\\_R\\_OFFSET](#) = (uint32\_t) 0x0404 , [GPIO\\_IBE\\_R\\_OFFSET](#) = (uint32\_t) 0x0408 ,  
[GPIO\\_IEV\\_R\\_OFFSET](#) = (uint32\_t) 0x040C , [GPIO\\_IM\\_R\\_OFFSET](#) = (uint32\_t) 0x0410 , [GPIO\\_ICR\\_R\\_OFFSET](#) = (uint32\_t) 0x041C , [GPIO\\_AFSEL\\_R\\_OFFSET](#) = (uint32\_t) 0x0420 ,  
[GPIO\\_DR2R\\_R\\_OFFSET](#) = (uint32\_t) 0x0500 , [GPIO\\_DR4R\\_R\\_OFFSET](#) = (uint32\_t) 0x0504 ,  
[GPIO\\_DR8R\\_R\\_OFFSET](#) = (uint32\_t) 0x0508 , [GPIO\\_PUR\\_R\\_OFFSET](#) = (uint32\_t) 0x0510 ,  
[GPIO\\_PDR\\_R\\_OFFSET](#) = (uint32\_t) 0x0518 , [GPIO\\_DEN\\_R\\_OFFSET](#) = (uint32\_t) 0x051C , [GPIO\\_LOCK\\_R\\_OFFSET](#) = (uint32\_t) 0x0520 , [GPIO\\_COMMIT\\_R\\_OFFSET](#) = (uint32\_t) 0x0524 ,  
[GPIO\\_AMSEL\\_R\\_OFFSET](#) = (uint32\_t) 0x0528 , [GPIO\\_PCTL\\_R\\_OFFSET](#) = (uint32\_t) 0x052C }

#### Variables

- static [GpioPortStruct\\_t](#) [GPIO\\_PTR\\_ARR](#) [6]

#### Initialization

- enum [GPIO\\_PortName\\_t](#) {  
[GPIO\\_PORT\\_A](#) , [GPIO\\_PORT\\_B](#) , [GPIO\\_PORT\\_C](#) , [GPIO\\_PORT\\_D](#) ,  
[GPIO\\_PORT\\_E](#) , [GPIO\\_PORT\\_F](#) , [A](#) = [GPIO\\_PORT\\_A](#) , [B](#) = [GPIO\\_PORT\\_B](#) ,  
[C](#) = [GPIO\\_PORT\\_C](#) , [D](#) = [GPIO\\_PORT\\_D](#) , [E](#) = [GPIO\\_PORT\\_E](#) , [F](#) = [GPIO\\_PORT\\_F](#) }
- [GpioPort\\_t](#) [GPIO\\_InitPort](#) ([GPIO\\_PortName\\_t](#) portName)  
*Initialize a GPIO Port and return a pointer to its struct.*
- bool [GPIO\\_isPortInit](#) ([GpioPort\\_t](#) gpioPort)  
*Check if the GPIO port is initialized.*
- uint32\_t [GPIO\\_getBaseAddr](#) ([GpioPort\\_t](#) gpioPort)  
*Get the base address of a GPIO port.*

### Configuration (Digital I/O)

- enum **GpioPin\_t** {  
**GPIO\_PIN0** = ((uint8\_t) 1) , **GPIO\_PIN1** = ((uint8\_t) (1 << 1)) , **GPIO\_PIN2** = ((uint8\_t) (1 << 2)) , **GPIO\_PIN3** = ((uint8\_t) (1 << 3)) ,  
**GPIO\_PIN4** = ((uint8\_t) (1 << 4)) , **GPIO\_PIN5** = ((uint8\_t) (1 << 5)) , **GPIO\_PIN6** = ((uint8\_t) (1 << 6)) ,  
**GPIO\_PIN7** = ((uint8\_t) (1 << 7)) ,  
**GPIO\_ALL\_PINS** = ((uint8\_t) (0xFF)) }
- enum **GPIO\_LAUNCHPAD\_LEDS** {  
**LED\_RED** = **GPIO\_PIN1** , **LED\_GREEN** = **GPIO\_PIN3** , **LED\_BLUE** = **GPIO\_PIN2** , **LED\_YELLOW** = (**LED\_RED** + **LED\_GREEN**) ,  
**LED\_CYAN** = (**LED\_BLUE** + **LED\_GREEN**) , **LED\_PURPLE** = (**LED\_RED** + **LED\_BLUE**) , **LED\_WHITE** = (**LED\_RED** + **LED\_BLUE** + **LED\_GREEN**) }
- enum **gpioDir\_t** { **GPIO\_INPUT** , **GPIO\_OUTPUT** }
- enum **gpioResistor\_t** { **PULLUP** , **PULLDOWN** }
- void **GPIO\_configDirection** (GpioPort\_t gpioPort, GpioPin\_t pinMask, gpioDir\_t direction)  
*Configure the direction of the specified GPIO pins.*
- void **GPIO\_configResistor** (GpioPort\_t gpioPort, GpioPin\_t pinMask, gpioResistor\_t resistor)  
*Activate the specified pins' internal pull-up or pull-down resistors.*
- void **GPIO\_ConfigDriveStrength** (GpioPort\_t gpioPort, GpioPin\_t pinMask, uint8\_t drive\_mA)  
*Configure the specified pins' drive strength. Pins are initialized with 2[mA] drive strength, so this is only needed for a drive strength of 4[mA] or 8[mA].*
- void **GPIO\_EnableDigital** (GpioPort\_t gpioPort, GpioPin\_t pinMask)  
*Enable digital I/O for the specified pins.*
- void **GPIO\_DisableDigital** (GpioPort\_t gpioPort, GpioPin\_t pinMask)  
*Disable digital I/O for the specified pins.*

### Configuration (Interrupts)

- void **GPIO\_ConfigInterrupts\_Edge** (GpioPort\_t gpioPort, GpioPin\_t pinMask, bool risingEdge)  
*Configure the specified GPIO pins to trigger an interrupt on the rising or falling edge of an input.*
- void **GPIO\_ConfigInterrupts\_BothEdges** (GpioPort\_t gpioPort, GpioPin\_t pinMask)  
*Configure the specified GPIO pins to trigger an interrupt on both edges of an input.*
- void **GPIO\_ConfigInterrupts\_LevelTrig** (GpioPort\_t gpioPort, GpioPin\_t pinMask, bool highLevel)  
*Configure the specified GPIO pins to trigger an interrupt on a high level or low level pulse.*
- void **GPIO\_ConfigNVIC** (GpioPort\_t gpioPort, uint8\_t priority)  
*Configure interrupts for the selected port in the NVIC.*

### Basic Functions (Digital I/O)

- volatile uint32\_t \* **GPIO\_getDataRegister** (GpioPort\_t gpioPort)  
*Get the address of a GPIO port's data register.*
- uint8\_t **GPIO\_ReadPins** (GpioPort\_t gpioPort, GpioPin\_t pinMask)  
*Read from the specified GPIO pin.*
- void **GPIO\_WriteHigh** (GpioPort\_t gpioPort, GpioPin\_t pinMask)  
*Write a 1 to the specified GPIO pins.*
- void **GPIO\_WriteLow** (GpioPort\_t gpioPort, GpioPin\_t pinMask)  
*Write a 0 to the specified GPIO pins.*
- void **GPIO\_Toggle** (GpioPort\_t gpioPort, GpioPin\_t pinMask)  
*Toggle the specified GPIO pins.*

### Configuration (Alternate/Analog Modes)

- void [GPIO\\_ConfigAltMode](#) (GpioPort\_t gpioPort, GpioPin\_t pinMask)  
*Activate the alternate mode for the specified pins.*
- void [GPIO\\_ConfigPortCtrl](#) (GpioPort\_t gpioPort, GpioPin\_t pinMask, uint8\_t fieldEncoding)  
*Specify the alternate mode to use for the specified pins.*
- void [GPIO\\_ConfigAnalog](#) (GpioPort\_t gpioPort, GpioPin\_t pinMask)  
*Activate analog mode for the specified GPIO pins.*

#### 5.4.3.1 Detailed Description

Functions for using GPIO ports.

#### 5.4.3.2 Enumeration Type Documentation

##### GPIO\_REGISTER\_OFFSETS

enum [GPIO\\_REGISTER\\_OFFSETS](#)

##### Enumerator

GPIO_DATA_R_OFFSET	data
GPIO_DIR_R_OFFSET	direction
GPIO_IS_R_OFFSET	interrupt sense
GPIO_IBE_R_OFFSET	interrupt both edges
GPIO_IEV_R_OFFSET	interrupt event
GPIO_IM_R_OFFSET	interrupt mask
GPIO_ICR_R_OFFSET	interrupt clear
GPIO_AFSEL_R_OFFSET	alternate function select
GPIO_DR2R_R_OFFSET	drive strength (2 [ma])
GPIO_DR4R_R_OFFSET	drive strength (4 [ma])
GPIO_DR8R_R_OFFSET	drive strength (8 [ma])
GPIO_PUR_R_OFFSET	pull-up resistor
GPIO_PDR_R_OFFSET	pull-down resistor
GPIO_DEN_R_OFFSET	digital enable
GPIO_LOCK_R_OFFSET	lock
GPIO_COMMIT_R_OFFSET	commit
GPIO_AMSEL_R_OFFSET	alternate mode select
GPIO_PCTL_R_OFFSET	port control

##### GPIO\_LAUNCHPAD\_LEDS

enum [GPIO\\_LAUNCHPAD\\_LEDS](#)

##### Enumerator

LED_RED	PF1.
---------	------

## Enumerator

LED_GREEN	PF3.
LED_BLUE	PF2.

## 5.4.3.3 Function Documentation

**GPIO\_InitPort()**

```
GpioPort_t GPIO_InitPort (
    GPIO_PortName_t portName )
```

Initialize a GPIO Port and return a pointer to its struct.

## Parameters

in	<i>portName</i>	Name of the chosen port.
out	<i>gpioPort</i>	Pointer to the specified GPIO port.

**GPIO\_isPortInit()**

```
bool GPIO_isPortInit (
    GpioPort_t gpioPort )
```

Check if the GPIO port is initialized.

## Parameters

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
out	<i>true</i>	The GPIO port is initialized.
out	<i>false</i>	The GPIO port has not been initialized.

**GPIO\_getBaseAddr()**

```
uint32_t GPIO_getBaseAddr (
    GpioPort_t gpioPort )
```

Get the base address of a GPIO port.

## Parameters

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
out	<i>baseAddress</i>	Base address of the GPIO port.



**GPIO\_configDirection()**

```
void GPIO_configDirection (
    GpioPort_t gpioPort,
    GpioPin_t pinMask,
    gpioDir_t direction )
```

Configure the direction of the specified GPIO pins.

**Precondition**

Initialize the GPIO port.

**Parameters**

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
in	<i>pinMask</i>	Bit mask corresponding to the intended pin(s).
in	<i>direction</i>	The direction for the intended pin(s).

**Postcondition**

The specified GPIO pins are now configured as inputs or outputs.

**See also**

[GPIO\\_InitPort\(\)](#)

**GPIO\_configResistor()**

```
void GPIO_configResistor (
    GpioPort_t gpioPort,
    GpioPin_t pinMask,
    gpioResistor_t resistor )
```

Activate the specified pins' internal pull-up or pull-down resistors.

**Precondition**

Initialize the GPIO port.

**Parameters**

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
in	<i>pinMask</i>	Bit mask corresponding to the intended pin(s).
in	<i>resistor</i>	The type of resistor to use.

**Postcondition**

The pull-up/pull-down resistor(s) are now activated.

**See also**

[GPIO\\_InitPort\(\)](#)

**GPIO\_ConfigDriveStrength()**

```
void GPIO_ConfigDriveStrength (
    GpioPort_t gpioPort,
    GpioPin_t pinMask,
    uint8_t drive_mA )
```

Configure the specified pins' drive strength. Pins are initialized with 2[mA] drive strength, so this is only needed for a drive strength of 4[mA] or 8[mA].

**Parameters**

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
in	<i>pinMask</i>	Bit mask corresponding to the intended pin(s).
in	<i>drive_mA</i>	Drive strength in [mA]. Should be 2, 4, or 8 [mA].

**GPIO\_EnableDigital()**

```
void GPIO_EnableDigital (
    GpioPort_t gpioPort,
    GpioPin_t pinMask )
```

Enable digital I/O for the specified pins.

**Parameters**

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
in	<i>pinMask</i>	Bit mask corresponding to the intended pin(s).

**GPIO\_DisableDigital()**

```
void GPIO_DisableDigital (
    GpioPort_t gpioPort,
    GpioPin_t pinMask )
```

Disable digital I/O for the specified pins.

**Parameters**

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
in	<i>pinMask</i>	Bit mask corresponding to the intended pin(s).

### GPIO\_ConfigInterrupts\_Edge()

```
void GPIO_ConfigInterrupts_Edge (
    GpioPort_t gpioPort,
    GpioPin_t pinMask,
    bool risingEdge )
```

Configure the specified GPIO pins to trigger an interrupt on the rising or falling edge of an input.

#### Parameters

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
in	<i>pinMask</i>	Bit mask corresponding to the intended pin(s).
in	<i>risingEdge</i>	true for rising edge, false for falling edge

### GPIO\_ConfigInterrupts\_BothEdges()

```
void GPIO_ConfigInterrupts_BothEdges (
    GpioPort_t gpioPort,
    GpioPin_t pinMask )
```

Configure the specified GPIO pins to trigger an interrupt on both edges of an input.

#### Parameters

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
in	<i>pinMask</i>	Bit mask corresponding to the intended pin(s).

### GPIO\_ConfigInterrupts\_LevelTrig()

```
void GPIO_ConfigInterrupts_LevelTrig (
    GpioPort_t gpioPort,
    GpioPin_t pinMask,
    bool highLevel )
```

Configure the specified GPIO pins to trigger an interrupt on a high level or low level pulse.

#### Parameters

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
in	<i>pinMask</i>	Bit mask corresponding to the intended pin(s).
in	<i>highLevel</i>	true for high level, false for low level

### GPIO\_ConfigNVIC()

```
void GPIO_ConfigNVIC (
    GpioPort_t gpioPort,
    uint8_t priority )
```

Configure interrupts for the selected port in the NVIC.

#### Parameters

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
in	<i>priority</i>	Priority number between 0 (highest) and 7 (lowest).

### GPIO\_getDataRegister()

```
volatile uint32_t * GPIO_getDataRegister (
    GpioPort_t gpioPort )
```

Get the address of a GPIO port's data register.

#### Parameters

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
out	<i>dataRegister</i>	Address of the GPIO port's data register.

### GPIO\_ReadPins()

```
uint8_t GPIO_ReadPins (
    GpioPort_t gpioPort,
    GpioPin_t pinMask )
```

Read from the specified GPIO pin.

#### Parameters

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
in	<i>pinMask</i>	Bit mask corresponding to the intended pin(s).

### GPIO\_WriteHigh()

```
void GPIO_WriteHigh (
    GpioPort_t gpioPort,
    GpioPin_t pinMask )
```

Write a 1 to the specified GPIO pins.

#### Parameters

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
in	<i>pinMask</i>	Bit mask corresponding to the intended pin(s).

**GPIO\_WriteLow()**

```
void GPIO_WriteLow (
    GpioPort_t gpioPort,
    GpioPin_t pinMask )
```

Write a 0 to the specified GPIO pins.

**Parameters**

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
in	<i>pinMask</i>	Bit mask corresponding to the intended pin(s).

**GPIO\_Toggle()**

```
void GPIO_Toggle (
    GpioPort_t gpioPort,
    GpioPin_t pinMask )
```

Toggle the specified GPIO pins.

**Parameters**

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
in	<i>pinMask</i>	Bit mask corresponding to the intended pin(s).

**GPIO\_ConfigAltMode()**

```
void GPIO_ConfigAltMode (
    GpioPort_t gpioPort,
    GpioPin_t pinMask )
```

Activate the alternate mode for the specified pins.

**Parameters**

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
in	<i>pinMask</i>	Bit mask corresponding to the intended pin(s).

**GPIO\_ConfigPortCtrl()**

```
void GPIO_ConfigPortCtrl (
    GpioPort_t gpioPort,
    GpioPin_t pinMask,
    uint8_t fieldEncoding )
```

Specify the alternate mode to use for the specified pins.

## Parameters

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
in	<i>pinMask</i>	Bit mask corresponding to the intended pin(s).
in	<i>fieldEncoding</i>	Number corresponding to intended alternate mode.

**GPIO\_ConfigAnalog()**

```
void GPIO_ConfigAnalog (
    GpioPort_t gpioPort,
    GpioPin_t pinMask )
```

Activate analog mode for the specified GPIO pins.

## Parameters

in	<i>gpioPort</i>	Pointer to the specified GPIO port.
in	<i>pinMask</i>	Bit mask corresponding to the intended pin(s).

**5.4.3.4 Variable Documentation****GPIO\_PTR\_ARR**

```
GpioPortStruct_t GPIO_PTR_ARR[6] [static]
```

**Initial value:**

```
= {
    { GPIO_PORTA_BASE_ADDRESS, (GPIO_PORTA_BASE_ADDRESS + GPIO_DATA_R_OFFSET), false },
    { GPIO_PORTB_BASE_ADDRESS, (GPIO_PORTB_BASE_ADDRESS + GPIO_DATA_R_OFFSET), false },
    { GPIO_PORTC_BASE_ADDRESS, (GPIO_PORTC_BASE_ADDRESS + GPIO_DATA_R_OFFSET), false },
    { GPIO_PORTD_BASE_ADDRESS, (GPIO_PORTD_BASE_ADDRESS + GPIO_DATA_R_OFFSET), false },
    { GPIO_PORTE_BASE_ADDRESS, (GPIO_PORTE_BASE_ADDRESS + GPIO_DATA_R_OFFSET), false },
    { GPIO_PORTF_BASE_ADDRESS, (GPIO_PORTF_BASE_ADDRESS + GPIO_DATA_R_OFFSET), false },
}
```

**5.4.4 Phase-Locked Loop (PLL)**

Function for initializing the phase-locked loop.

**Files**

- file [PLL.c](#)  
*Implementation details for phase-lock-loop (PLL) functions.*
- file [PLL.h](#)  
*Driver module for activating the phase-locked-loop (PLL).*

**Functions**

- void [PLL\\_Init](#) (void)  
*Initialize the phase-locked-loop to change the bus frequency.*

#### 5.4.4.1 Detailed Description

Function for initializing the phase-locked loop.

#### 5.4.4.2 Function Documentation

##### PLL\_Init()

```
void PLL_Init (
    void )
```

Initialize the phase-locked-loop to change the bus frequency.

##### Postcondition

The bus frequency is now running at 80 [MHz].

#### 5.4.5 Serial Peripheral Interface (SPI)

Functions for SPI-based communication via the SSI peripheral.

##### Files

- file [SPI.c](#)  
*Source code for serial peripheral interface (SPI) module.*
- file [SPI.h](#)  
*Header file for serial peripheral interface (SPI) module.*

##### Data Structures

- struct [Spi\\_t](#)

##### Enumerations

- enum **GPIO\_PORT\_BASE\_ADDRESSES** {  
    **GPIO\_PORTA\_BASE\_ADDRESS** = (uint32\_t) 0x40004000 , **GPIO\_PORTB\_BASE\_ADDRESS** = (uint32\_t) 0x40005000 , **GPIO\_PORTC\_BASE\_ADDRESS** = (uint32\_t) 0x40006000 , **GPIO\_PORTD\_BASE\_ADDRESS** = (uint32\_t) 0x40007000 ,  
    **GPIO\_PORTE\_BASE\_ADDRESS** = (uint32\_t) 0x40024000 , **GPIO\_PORTF\_BASE\_ADDRESS** = (uint32\_t) 0x40025000 }
- enum **SSI\_BASE\_ADDRESSES** { **SSI0\_BASE\_ADDR** = (uint32\_t) 0x40008000 , **SSI1\_BASE\_ADDR** = (uint32\_t) 0x40009000 , **SSI2\_BASE\_ADDR** = (uint32\_t) 0x4000A000 , **SSI3\_BASE\_ADDR** = (uint32\_t) 0x4000B000 }
- enum **SSI\_REGISTER\_OFFSETS** {  
    **CTRL0\_OFFSET** = (uint32\_t) 0 , **CTRL1\_OFFSET** = (uint32\_t) 0x004 , **DATA\_OFFSET** = (uint32\_t) 0x008 ,  
    **STATUS\_OFFSET** = (uint32\_t) 0x00C ,  
    **CLK\_PRESCALE\_OFFSET** = (uint32\_t) 0x010 , **INT\_MASK\_OFFSET** = (uint32\_t) 0x014 , **RAW\_INT\_STATUS\_OFFSET** = (uint32\_t) 0x018 , **MASKED\_INT\_STATUS\_OFFSET** = (uint32\_t) 0x01C ,  
    **INT\_CLEAR\_OFFSET** = (uint32\_t) 0x020 }
- enum **SsiNum\_t** { **SSI0** , **SSI1** , **SSI2** , **SSI3** }
- enum **SpiClockPhase\_t** { **SPI\_RISING\_EDGE** , **SPI\_FALLING\_EDGE** }
- enum **SpiClockPolarity\_t** { **SPI\_STEADY\_STATE\_LOW** , **SPI\_STEADY\_STATE\_HIGH** }

## Functions

- Spi\_t **SPI\_Init** (GpioPort\_t gpioPort, GpioPin\_t dcPin, SsiNum\_t ssiNum)  
*Initialize an SSI as an SPI controller.*
- bool **SPI\_isInit** (Spi\_t spi)  
*Check if a given SPI is initialized.*
- void **SPI\_configClock** (Spi\_t spi, SpiClockPhase\_t clockPhase, SpiClockPolarity\_t clockPolarity)  
*Configure an SPI's clock settings.*
- void **SPI\_setDataSize** (Spi\_t spi, uint8\_t dataSize)
- void **SPI\_Enable** (Spi\_t spi)  
*Enable an SPI.*
- void **SPI\_Disable** (Spi\_t spi)  
*Disable an SPI.*
- uint16\_t **SPI\_Read** (Spi\_t spi)  
*Read data from the serial port.*
- void **SPI\_WriteCmd** (Spi\_t spi, uint16\_t cmd)  
*Write a command to the serial port.*
- void **SPI\_WriteData** (Spi\_t spi, uint16\_t data)  
*Write data to the serial port.*

## Variables

- static SpiStruct\_t **SPI\_ARR** [4]

### 5.4.5.1 Detailed Description

Functions for SPI-based communication via the SSI peripheral.

### 5.4.5.2 Function Documentation

#### SPI\_Init()

```
Spi_t SPI_Init (
    GpioPort_t gpioPort,
    GpioPin_t dcPin,
    SsiNum_t ssiNum )
```

Initialize an SSI as an SPI controller.

#### Parameters

in	<i>gpioPort</i>	GPIO port to use.
in	<i>dcPin</i>	GPIO pin to use.
in	<i>ssiNum</i>	SSI to use.
out	<i>Spi_t</i>	(Pointer to) initialized SPI peripheral.



**SPI\_isInit()**

```
bool SPI_isInit (
    Spi_t spi )
```

Check if a given SPI is initialized.

**Parameters**

in	<i>spi</i>	SPI to check.
out	<i>true</i>	The SPI is initialized.
out	<i>false</i>	The SPI is not initialized.

**SPI\_configClock()**

```
void SPI_configClock (
    Spi_t spi,
    SpiClockPhase_t clockPhase,
    SpiClockPolarity_t clockPolarity )
```

Configure an SPI's clock settings.

**Precondition**

Initialize the SPI.

Disable the SPI.

**Parameters**

in	<i>spi</i>	SPI to configure.
in	<i>clockPhase</i>	
in	<i>clockPolarity</i>	

**SPI\_setDataSize()**

```
void SPI_setDataSize (
    Spi_t spi,
    uint8_t dataSize )
```

**Precondition**

Initialize the SPI.

Disable the SPI.

**Parameters**

in	<i>spi</i>	
in	<i>dataSize</i>	

### SPI\_Enable()

```
void SPI_Enable (
    Spi_t spi )
```

Enable an SPI.

#### Precondition

Initialize the SPI.

#### Parameters

in	<i>spi</i>	SPI to enable.
----	------------	----------------

#### Postcondition

The SPI is enable.

#### See also

[SPI\\_Disable\(\)](#)

### SPI\_Disable()

```
void SPI_Disable (
    Spi_t spi )
```

Disable an SPI.

#### Precondition

Initialize the SPI.

#### Parameters

in	<i>spi</i>	SPI to disable.
----	------------	-----------------

#### Postcondition

The SPI is disabled.

#### See also

[SPI\\_Enable\(\)](#)

## SPI\_Read()

```
uint16_t SPI_Read (
    Spi_t spi )
```

Read data from the serial port.

### Precondition

Initialize the SPI.

Enable the SPI.

### Parameters

in	<i>spi</i>	SPI to read from.
out	<i>data</i>	8-bit data received from the hardware's receive FIFO.

## SPI\_WriteCmd()

```
void SPI_WriteCmd (
    Spi_t spi,
    uint16_t cmd )
```

Write a command to the serial port.

### Precondition

Initialize the SPI.

Enable the SPI.

### Parameters

in	<i>spi</i>	SPI to write to.
in	<i>cmd</i>	Command to write.

### Postcondition

The D/C pin is cleared.

The command is added to the hardware's transmit FIFO.

## SPI\_WriteData()

```
void SPI_WriteData (
    Spi_t spi,
    uint16_t data )
```

Write data to the serial port.

**Precondition**

Initialize the SPI.

Enable the SPI.

**Parameters**

in	<i>spi</i>	SPI to write to.
in	<i>data</i>	Data to write.

**Postcondition**

The D/C pin is set.

The data is added to the hardware's transmit FIFO.

**5.4.5.3 Variable Documentation****SPI\_ARR**

```
SpiStruct_t SPI_ARR[4] [static]
```

**Initial value:**

```
= {
  { SSI0_BASE_ADDR, (volatile uint32_t *) (SSI0_BASE_ADDR + DATA_OFFSET),
    (volatile uint32_t *) (SSI0_BASE_ADDR + STATUS_OFFSET), 0, 0, 0, false, false },
  { SSI1_BASE_ADDR, (volatile uint32_t *) (SSI1_BASE_ADDR + DATA_OFFSET),
    (volatile uint32_t *) (SSI1_BASE_ADDR + STATUS_OFFSET), 0, 0, 0, false, false },
  { SSI2_BASE_ADDR, (volatile uint32_t *) (SSI2_BASE_ADDR + DATA_OFFSET),
    (volatile uint32_t *) (SSI2_BASE_ADDR + STATUS_OFFSET), 0, 0, 0, false, false },
  { SSI3_BASE_ADDR, (volatile uint32_t *) (SSI3_BASE_ADDR + DATA_OFFSET),
    (volatile uint32_t *) (SSI3_BASE_ADDR + STATUS_OFFSET), 0, 0, 0, false, false },
}
```

**5.4.6 Timer**

Functions for using hardware timers.

**Files**

- file [Timer.c](#)  
*Source code for Timer module.*
- file [Timer.h](#)  
*Device driver for general-purpose timer modules.*

**Data Structures**

- struct [Timer\\_t](#)

## Enumerations

- enum {  
**TIMER0\_BASE** = 0x40030000 , **TIMER1\_BASE** = 0x40031000 , **TIMER2\_BASE** = 0x40032000 , **TIMER3\_**  
**\_BASE** = 0x40033000 ,  
**TIMER4\_BASE** = 0x40034000 , **TIMER5\_BASE** = 0x40035000 }
- enum **REGISTER\_OFFSETS** {  
**CONFIG** = 0x00 , **MODE** = 0x04 , **CTRL** = 0x0C , **INT\_MASK** = 0x18 ,  
**INT\_CLEAR** = 0x24 , **INTERVAL** = 0x28 , **VALUE** = 0x054 }
- enum **timerName\_t** {  
**TIMER0** , **TIMER1** , **TIMER2** , **TIMER3** ,  
**TIMER4** , **TIMER5** }
- enum **timerMode\_t** { **ONESHOT** , **PERIODIC** }
- enum **timerDirection\_t** { **UP** , **DOWN** }

## Functions

- Timer\_t **Timer\_Init** (timerName\_t timerName)  
*Initialize a hardware timer.*
- void **Timer\_Deinit** (Timer\_t timer)  
*De-initialize a hardware timer.*
- timerName\_t **Timer\_getName** (Timer\_t timer)  
*Get the name of a timer object.*
- bool **Timer\_isInit** (Timer\_t timer)  
*Check if a timer object is initialized.*
- void **Timer\_setMode** (Timer\_t timer, timerMode\_t timerMode, timerDirection\_t timerDirection)  
*Set the mode for the timer.*
- void **Timer\_enableAdcTrigger** (Timer\_t timer)  
*Set the timer to trigger ADC sample capture once it reaches timeout (i.e. down to 0 or up to its reload value).*
- void **Timer\_disableAdcTrigger** (Timer\_t timer)  
*Disable ADC sample capture on timeout.*
- void **Timer\_enableInterruptOnTimeout** (Timer\_t timer)  
*Set the timer to trigger an interrupt on timeout.*
- void **Timer\_disableInterruptOnTimeout** (Timer\_t timer)  
*Stop the timer from triggering interrupts on timeout.*
- void **Timer\_clearInterruptFlag** (Timer\_t timer)  
*Clear the timer's interrupt flag to acknowledge the interrupt.*
- void **Timer\_setInterval\_ms** (Timer\_t timer, uint32\_t time\_ms)  
*Set the interval to use.*
- uint32\_t **Timer\_getCurrentValue** (Timer\_t timer)
- void **Timer\_Start** (Timer\_t timer)  
*Start the timer.*
- void **Timer\_Stop** (Timer\_t timer)  
*Stop the timer.*
- bool **Timer\_isCounting** (Timer\_t timer)  
*Check if the timer is currently counting.*
- void **Timer\_Wait1ms** (Timer\_t timer, uint32\_t time\_ms)  
*Initiate a time delay.*

## Variables

- static TimerStruct\_t **TIMER\_POOL** [6]

### 5.4.6.1 Detailed Description

Functions for using hardware timers.

### 5.4.6.2 Enumeration Type Documentation

#### timerMode\_t

```
enum timerMode_t
```

##### Enumerator

ONESHOT	the timer runs once, then stops
PERIODIC	the timer runs continuously once started

#### timerDirection\_t

```
enum timerDirection_t
```

##### Enumerator

UP	the timer starts at 0 and counts to the reload value
DOWN	the timer starts at its reload value and counts down

### 5.4.6.3 Function Documentation

#### Timer\_Init()

```
Timer_t Timer_Init (
    timerName_t timerName )
```

Initialize a hardware timer.

##### Parameters

in	<i>timerName</i>	Name of the hardware timer to use.
out	<i>timer</i>	Pointer to timer object.

##### Postcondition

The timer is ready to be configured and used.

##### See also

[Timer\\_isInit\(\)](#), [Timer\\_Deinit\(\)](#)

### Timer\_Deinit()

```
void Timer_Deinit (
    Timer_t timer )
```

De-initialize a hardware timer.

#### Parameters

in	<i>timerName</i>	Name of the hardware timer to use.
----	------------------	------------------------------------

#### Postcondition

The hardware timer is no longer initialized or receiving power.

#### See also

[Timer\\_Init\(\)](#), [Timer\\_isInit\(\)](#)

### Timer\_getName()

```
timerName_t Timer_getName (
    Timer_t timer )
```

Get the name of a timer object.

#### Parameters

in	<i>timer</i>	Pointer to timer object.
out	<i>timer</i> ↔ <i>Name_t</i>	Name of the hardware timer being used.

### Timer\_isInit()

```
bool Timer_isInit (
    Timer_t timer )
```

Check if a timer object is initialized.

#### Parameters

in	<i>timer</i>	Pointer to timer object.
out	<i>true</i>	The timer is initialized.
out	<i>false</i>	The timer is not initialized.

#### See also

[Timer\\_Init\(\)](#), [Timer\\_Deinit\(\)](#)

**Timer\_setMode()**

```
void Timer_setMode (
    Timer_t timer,
    timerMode_t timerMode,
    timerDirection_t timerDirection )
```

Set the mode for the timer.

**Parameters**

in	<i>timer</i>	Pointer to timer object.
in	<i>timerMode</i>	Mode for hardware timer to use.
in	<i>timerDirection</i>	Direction to count towards.

**Timer\_enableAdcTrigger()**

```
void Timer_enableAdcTrigger (
    Timer_t timer )
```

Set the timer to trigger ADC sample capture once it reaches timeout (i.e. down to 0 or up to its reload value).

**Precondition**

Initialize and configure an ADC module to be timer-triggered.

**Parameters**

in	<i>timer</i>	Pointer to timer object.
----	--------------	--------------------------

**Postcondition**

A timeout event triggers ADC sample capture.

**See also**

[Timer\\_disableAdcTrigger\(\)](#)

**Timer\_disableAdcTrigger()**

```
void Timer_disableAdcTrigger (
    Timer_t timer )
```

Disable ADC sample capture on timeout.

**Precondition**

Initialize and configure an ADC module to be timer-triggered.



**Parameters**

in	<i>timer</i>	Pointer to timer object.
----	--------------	--------------------------

**Postcondition**

A timeout event no longer triggers ADC sample capture.

**See also**

[Timer\\_enableAdcTrigger\(\)](#)

**Timer\_enableInterruptOnTimeout()**

```
void Timer_enableInterruptOnTimeout (
    Timer_t timer )
```

Set the timer to trigger an interrupt on timeout.

**Precondition**

Configure the interrupt service routine using the ISR module.

**Parameters**

in	<i>timer</i>	Pointer to timer object.
----	--------------	--------------------------

**Postcondition**

Upon timeout, an interrupt is triggered.

**See also**

[Timer\\_disableInterruptOnTimeout\(\)](#)

**Timer\_disableInterruptOnTimeout()**

```
void Timer_disableInterruptOnTimeout (
    Timer_t timer )
```

Stop the timer from triggering interrupts on timeout.

**Parameters**

in	<i>timer</i>	Pointer to timer object.
----	--------------	--------------------------

**Postcondition**

Timeout no longer triggers ADC sample capture.

**See also**

[Timer\\_enableInterruptOnTimeout\(\)](#)

**Timer\_clearInterruptFlag()**

```
void Timer_clearInterruptFlag (
    Timer_t timer )
```

Clear the timer's interrupt flag to acknowledge the interrupt.

**Precondition**

Call this during a timer's interrupt service routine (ISR).

**Parameters**

in	<i>timer</i>	Pointer to timer object.
----	--------------	--------------------------

**Timer\_setInterval\_ms()**

```
void Timer_setInterval_ms (
    Timer_t timer,
    uint32_t time_ms )
```

Set the interval to use.

**Precondition**

Initialize and configure the timer.

**Parameters**

in	<i>timer</i>	Pointer to timer object.
in	<i>time_ms</i>	Time in [ms].

**Postcondition**

Upon starting, the Timer counts down from or up to this value.

**See also**

[Timer\\_Init\(\)](#), [Timer\\_setMode\(\)](#)

**Timer\_Start()**

```
void Timer_Start (
    Timer_t timer )
```

Start the timer.

**Precondition**

Initialize and configure the timer.

**Parameters**

in	<i>timer</i>	Pointer to timer object.
----	--------------	--------------------------

**Postcondition**

The timer is counting.

**See also**

[Timer\\_Stop\(\)](#), [Timer\\_isCounting\(\)](#)

**Timer\_Stop()**

```
void Timer_Stop (
    Timer_t timer )
```

Stop the timer.

**Precondition**

Start the timer.

**Parameters**

in	<i>timer</i>	Pointer to timer object.
----	--------------	--------------------------

**Postcondition**

The timer is no longer counting.

**See also**

[Timer\\_Start\(\)](#), [Timer\\_isCounting\(\)](#)

**Timer\_isCounting()**

```
bool Timer_isCounting (
    Timer_t timer )
```

Check if the timer is currently counting.

**Parameters**

in	<i>timer</i>	Pointer to timer object.
out	<i>true</i>	The timer is counting.
out	<i>false</i>	The timer is not counting.

See also

[Timer\\_Start\(\)](#), [Timer\\_Stop\(\)](#)

**Timer\_Wait1ms()**

```
void Timer_Wait1ms (
    Timer_t timer,
    uint32_t time_ms )
```

Initiate a time delay.

**Precondition**

Initialize and configure the timer.

**Parameters**

in	<i>timer</i>	Pointer to timer object.
in	<i>time_ms</i>	Time in [ms] to wait for.

**Postcondition**

The program is delayed for the desired time.

**5.4.6.4 Variable Documentation****TIMER\_POOL**

```
TimerStruct_t TIMER_POOL[6] [static]
```

**Initial value:**

```
= {
    { TIMER0, TIMER0_BASE, (register_t) (TIMER0_BASE + CTRL), (register_t) (TIMER0_BASE + INTERVAL),
      (register_t) (TIMER0_BASE + INT_CLEAR), false },
    { TIMER1, TIMER1_BASE, (register_t) (TIMER1_BASE + CTRL), (register_t) (TIMER1_BASE + INTERVAL),
      (register_t) (TIMER1_BASE + INT_CLEAR), false },
```

```

{ TIMER2, TIMER2_BASE, (register_t) (TIMER2_BASE + CTRL), (register_t) (TIMER2_BASE + INTERVAL),
  (register_t) (TIMER2_BASE + INT_CLEAR), false },
{ TIMER3, TIMER3_BASE, (register_t) (TIMER3_BASE + CTRL), (register_t) (TIMER3_BASE + INTERVAL),
  (register_t) (TIMER3_BASE + INT_CLEAR), false },
{ TIMER4, TIMER4_BASE, (register_t) (TIMER4_BASE + CTRL), (register_t) (TIMER4_BASE + INTERVAL),
  (register_t) (TIMER4_BASE + INT_CLEAR), false },
{ TIMER5, TIMER5_BASE, (register_t) (TIMER5_BASE + CTRL), (register_t) (TIMER5_BASE + INTERVAL),
  (register_t) (TIMER5_BASE + INT_CLEAR), false }
}

```

### 5.4.7 Universal Asynchronous Receiver/Transmitter (UART)

Functions for serial communication via the UART peripheral.

#### Files

- file [UART.c](#)  
*Source code for UART module.*
- file [UART.h](#)  
*Driver module for serial communication via UART0 and UART 1.*

#### Data Structures

- struct [Uart\\_t](#)

#### Macros

- #define **ASCII\_CONVERSION** 0x30

#### Enumerations

- enum **GPIO\_BASE\_ADDRESSES** {  
**GPIO\_PORTA\_BASE** = (uint32\_t) 0x40004000 , **GPIO\_PORTB\_BASE** = (uint32\_t) 0x40005000 , **GPIO\_PORTC\_BASE** = (uint32\_t) 0x40006000 , **GPIO\_PORTD\_BASE** = (uint32\_t) 0x40007000 ,  
**GPIO\_PORTE\_BASE** = (uint32\_t) 0x40024000 , **GPIO\_PORTF\_BASE** = (uint32\_t) 0x40025000 }
- enum **UART\_BASE\_ADDRESSES** {  
**UART0\_BASE** = (uint32\_t) 0x4000C000 , **UART1\_BASE** = (uint32\_t) 0x4000D000 , **UART2\_BASE** = (uint32\_t) 0x4000E000 , **UART3\_BASE** = (uint32\_t) 0x4000F000 ,  
**UART4\_BASE** = (uint32\_t) 0x40010000 , **UART5\_BASE** = (uint32\_t) 0x40011000 , **UART6\_BASE** = (uint32\_t) 0x40012000 , **UART7\_BASE** = (uint32\_t) 0x40013000 }
- enum **UART\_REG\_OFFSETS** {  
**UART\_FR\_R\_OFFSET** = (uint32\_t) 0x18 , **IBRD\_R\_OFFSET** = (uint32\_t) 0x24 , **FBRD\_R\_OFFSET** = (uint32\_t) 0x28 , **LCRH\_R\_OFFSET** = (uint32\_t) 0x2C ,  
**CTL\_R\_OFFSET** = (uint32\_t) 0x30 , **CC\_R\_OFFSET** = (uint32\_t) 0xFC }
- enum **uartNum\_t** {  
**UART0** , **UART1** , **UART2** , **UART3** ,  
**UART4** , **UART5** , **UART6** , **UART7** }

## Functions

- `Uart_t UART_Init` (`GpioPort_t port`, `uartNum_t uartNum`)  
*Initialize the specified UART peripheral.*
- `bool UART_IsInit` (`Uart_t uart`)  
*Check if the UART object is initialized.*
- `unsigned char UART_ReadChar` (`Uart_t uart`)  
*Read a single ASCII character from the UART.*
- `void UART_WriteChar` (`Uart_t uart`, `unsigned char inputChar`)  
*Write a single character to the UART.*
- `void UART_WriteStr` (`Uart_t uart`, `void *inputStr`)  
*Write a C string to the UART.*
- `void UART_WriteInt` (`Uart_t uart`, `int32_t n`)  
*Write a 32-bit unsigned integer the UART.*
- `void UART_WriteFloat` (`Uart_t uart`, `double n`, `uint8_t numDecimals`)  
*Write a floating-point number the UART.*

## Variables

- static `UartStruct_t UART_ARR` [8]

### 5.4.7.1 Detailed Description

Functions for serial communication via the UART peripheral.

### 5.4.7.2 Function Documentation

#### UART\_Init()

```
Uart_t UART_Init (
    GpioPort_t port,
    uartNum_t uartNum )
```

Initialize the specified UART peripheral.

#### Parameters

in	<i>port</i>	GPIO port to use.
in	<i>uartNum</i>	UART number. Should be either one of the enumerated constants or an int in range [0, 7].
out	<i>uart</i>	(Pointer to) initialized UART peripheral.

Given the bus frequency ( $f_{bus}$ ) and desired baud rate (BR), the baud rate divisor (BRD) can be calculated:  
 $BRD = f_{bus} / (16 * BR)$

The integer BRD (IBRD) is simply the integer part of the BRD:  $IBRD = int(BRD)$

The fractional BRD (FBRD) is calculated using the fractional part ( $mod(BRD, 1)$ ) of the BRD:  $FBRD = int((mod(BRD, 1) * 64) + 0.5)$

**UART\_isInit()**

```
bool UART_isInit (
    Uart_t uart )
```

Check if the UART object is initialized.

**Parameters**

in	<i>uart</i>	UART to check.
out	<i>true</i>	The UART object is initialized.
out	<i>false</i>	The UART object is not initialized.

**UART\_ReadChar()**

```
unsigned char UART_ReadChar (
    Uart_t uart )
```

Read a single ASCII character from the UART.

**Parameters**

in	<i>uart</i>	UART to read from.
out	<i>unsigned</i>	char ASCII character from sender.

**UART\_WriteChar()**

```
void UART_WriteChar (
    Uart_t uart,
    unsigned char inputChar )
```

Write a single character to the UART.

**Parameters**

in	<i>uart</i>	UART to write to.
in	<i>input_char</i>	ASCII character to send.

**UART\_WriteStr()**

```
void UART_WriteStr (
    Uart_t uart,
    void * inputStr )
```

Write a C string to the UART.

## Parameters

in	<i>uart</i>	UART to write to.
in	<i>input_str</i>	Array of ASCII characters.

**UART\_WriteInt()**

```
void UART_WriteInt (
    Uart_t uart,
    int32_t n )
```

Write a 32-bit unsigned integer the UART.

## Parameters

in	<i>uart</i>	UART to write to.
in	<i>n</i>	Unsigned 32-bit <code>int</code> to be converted and transmitted.

**UART\_WriteFloat()**

```
void UART_WriteFloat (
    Uart_t uart,
    double n,
    uint8_t numDecimals )
```

Write a floating-point number the UART.

## Parameters

in	<i>uart</i>	UART to write to.
in	<i>n</i>	Floating-point number to be converted and transmitted.
in	<i>num_decimals</i>	Number of digits after the decimal point to include.

**5.4.7.3 Variable Documentation****UART\_ARR**

```
UartStruct_t UART_ARR[8] [static]
```

**Initial value:**

```
= {
    { UART0_BASE, ((register_t) (UART0_BASE + UART_FR_R_OFFSET)), 0, GPIO_PIN0, GPIO_PIN1, false },
    { UART1_BASE, ((register_t) (UART1_BASE + UART_FR_R_OFFSET)), 0, GPIO_PIN0, GPIO_PIN1, false },
    { UART2_BASE, ((register_t) (UART2_BASE + UART_FR_R_OFFSET)), 0, GPIO_PIN6, GPIO_PIN7, false },
    { UART3_BASE, ((register_t) (UART3_BASE + UART_FR_R_OFFSET)), 0, GPIO_PIN6, GPIO_PIN7, false },
    { UART4_BASE, ((register_t) (UART4_BASE + UART_FR_R_OFFSET)), 0, GPIO_PIN4, GPIO_PIN5, false },
    { UART5_BASE, ((register_t) (UART5_BASE + UART_FR_R_OFFSET)), 0, GPIO_PIN4, GPIO_PIN5, false },
    { UART6_BASE, ((register_t) (UART6_BASE + UART_FR_R_OFFSET)), 0, GPIO_PIN4, GPIO_PIN5, false },
    { UART7_BASE, ((register_t) (UART7_BASE + UART_FR_R_OFFSET)), 0, GPIO_PIN0, GPIO_PIN1, false }
}
```



### 5.4.8 Interrupt Service Routines

Functions for manipulating the interrupt vector table and setting up interrupt handlers via the NVIC.

#### Files

- file [ISR.c](#)  
*Source code for interrupt service routine (ISR) configuration module.*
- file [ISR.h](#)  
*Header file for interrupt service routine (ISR) configuration module.*

#### Macros

- `#define VECTOR_TABLE_BASE_ADDR ((uint32_t) 0x00000000)`
- `#define VECTOR_TABLE_SIZE ((uint32_t) 155)`
- `#define VECTOR_TABLE_ALIGNMENT ((uint32_t) (1 << 10))`
- `#define NVIC_EN_BASE_ADDR ((uint32_t) 0xE000E100)`
- `#define NVIC_DIS_BASE_ADDR ((uint32_t) 0xE000E180)`
- `#define NVIC_PRI_BASE_ADDR ((uint32_t) 0xE000E400)`
- `#define NVIC_UNPEND_BASE_ADDR ((uint32_t) 0xE000E280)`

#### Functions

- static void **ISR\_setStatus** (const uint8\_t vectorNum, const bool isEnabled)

#### Variables

- static bool **interruptsAreEnabled** = true
- void(\*const **interruptVectorTable** [ ])(void)
- static [ISR\\_t](#) **newVectorTable** [VECTOR\_TABLE\_SIZE]
- static bool **isTableCopiedToRam** = false

#### Interrupt Vector Table Configuration

- typedef void(\* **ISR\_t**) (void)  
*Interrupt service routine (ISR) function pointers.*
- void [ISR\\_InitNewTableInRam](#) (void)  
*Relocate the vector table to RAM.*
- void [ISR\\_addToIntTable](#) ([ISR\\_t](#) isr, const uint8\_t vectorNum)  
*Add an ISR to the interrupt table.*

#### Global Interrupt Configuration

- void [ISR\\_GlobalDisable](#) (void)  
*Disable all interrupts globally.*
- void [ISR\\_GlobalEnable](#) (void)  
*Enable all interrupts globally.*

### Individual Interrupt Configuration

- void [ISR\\_setPriority](#) (const uint8\_t vectorNum, const uint8\_t priority)  
*Set the priority for an interrupt.*
- void [ISR\\_Enable](#) (const uint8\_t vectorNum)  
*Enable an interrupt in the NVIC.*
- void [ISR\\_Disable](#) (const uint8\_t vectorNum)  
*Disable an interrupt in the NVIC.*
- void [ISR\\_triggerInterrupt](#) (const uint8\_t vectorNum)  
*Generate a software-generated interrupt (SGI).*

#### 5.4.8.1 Detailed Description

Functions for manipulating the interrupt vector table and setting up interrupt handlers via the NVIC.

#### 5.4.8.2 Function Documentation

##### ISR\_GlobalDisable()

```
void ISR_GlobalDisable (  
    void )
```

Disable all interrupts globally.

##### Note

Does not affect Reset, NMI, or hard faults.

##### See also

[ISR\\_GlobalEnable\(\)](#)

##### ISR\_GlobalEnable()

```
void ISR_GlobalEnable (  
    void )
```

Enable all interrupts globally.

##### Note

Does not affect Reset, NMI, or hard faults.

##### See also

[ISR\\_GlobalDisable\(\)](#)

### ISR\_InitNewTableInRam()

```
void ISR_InitNewTableInRam (
    void )
```

Relocate the vector table to RAM.

#### Precondition

Disable interrupts globally before calling this.

#### Postcondition

The vector table is now located in RAM, allowing the ISRs listed in the startup file to be replaced.

#### See also

[ISR\\_GlobalDisable\(\)](#), [ISR\\_addToIntTable\(\)](#)

### ISR\_addToIntTable()

```
void ISR_addToIntTable (
    ISR_t isr,
    const uint8_t vectorNum )
```

Add an ISR to the interrupt table.

#### Precondition

Initialize a new vector table in RAM before calling this function.

#### Parameters

in	<i>isr</i>	Name of the ISR to add.
in	<i>vectorNum</i>	ISR's vector number (i.e. offset from the top of the table). Should be in range [16, 154].

#### Postcondition

The ISR is now added to the vector table and available to be called.

#### See also

[ISR\\_InitNewTableInRam\(\)](#)

### ISR\_setPriority()

```
void ISR_setPriority (
    const uint8_t vectorNum,
    const uint8_t priority )
```

Set the priority for an interrupt.

**Precondition**

Disable the interrupt before adjusting its priority.

**Parameters**

in	<i>vectorNum</i>	ISR's vector number (i.e. offset from the top of the table). Should be in range [16, 154].
in	<i>priority</i>	Priority to assign. Highest priority is 0, lowest is 7.

**Postcondition**

The interrupt's priority has now been changed in the NVIC.

**See also**

[ISR\\_Disable\(\)](#)

**ISR\_Enable()**

```
void ISR_Enable (
    const uint8_t vectorNum )
```

Enable an interrupt in the NVIC.

**Precondition**

If needed, add the interrupt to the vector table.

If needed, set the interrupt's priority (default 0, or highest priority) before calling this.

**Parameters**

in	<i>vectorNum</i>	ISR's vector number (i.e. offset from the top of the table). Should be in range [16, 154].
----	------------------	--

**Postcondition**

The interrupt is now enabled in the NVIC.

**See also**

[ISR\\_addToIntTable\(\)](#), [ISR\\_setPriority\(\)](#), [ISR\\_Disable\(\)](#)

**ISR\_Disable()**

```
void ISR_Disable (
    const uint8_t vectorNum )
```

Disable an interrupt in the NVIC.

**Parameters**

<code>in</code>	<code>vectorNum</code>	ISR's vector number (i.e. offset from the top of the table). Should be in range [16, 154].
-----------------	------------------------	--

**Postcondition**

The interrupt is now disabled in the NVIC.

**See also**

[ISR\\_Enable\(\)](#)

**ISR\_triggerInterrupt()**

```
void ISR_triggerInterrupt (
    const uint8_t vectorNum )
```

Generate a software-generated interrupt (SGI).

**Precondition**

Enable the ISR (and set priority as needed).

Enable all interrupts.

**Parameters**

<code>in</code>	<code>vectorNum</code>	ISR's vector number (i.e. offset from the top of the table). Should be in range [16, 154].
-----------------	------------------------	--

**Postcondition**

The ISR should trigger once any higher priority ISRs return.

**See also**

[ISR\\_clearPending\(\)](#)

## 6 Data Structure Documentation

### 6.1 Fifo\_t Struct Reference

**Data Fields**

- volatile uint32\_t \* **buffer**  
*(pointer to) array to use as FIFO buffer*
- volatile uint32\_t **N**  
*length of buffer*

- volatile uint32\_t **frontIdx**  
*idx of front of FIFO*
- volatile uint32\_t **backIdx**  
*idx of back of FIFO*

The documentation for this struct was generated from the following file:

- [Fifo.c](#)

## 6.2 GpioPort\_t Struct Reference

### Data Fields

- const uint32\_t **BASE\_ADDRESS**
- const uint32\_t **DATA\_REGISTER**
- bool **isInit**

The documentation for this struct was generated from the following file:

- [GPIO.c](#)

## 6.3 Led\_t Struct Reference

### Data Fields

- GpioPort\_t **GPIO\_PORT\_PTR**  
*pointer to GPIO port data structure*
- GpioPin\_t **GPIO\_PIN**  
*GPIO pin number.*
- volatile uint32\_t \* **gpioDataRegister**
- bool **isOn**  
*state indicator*
- bool **isInit**

The documentation for this struct was generated from the following file:

- [Led.c](#)

## 6.4 Spi\_t Struct Reference

### Data Fields

- const uint32\_t **BASE\_ADDRESS**
- volatile uint32\_t \*const **DATA\_REGISTER**
- volatile uint32\_t \*const **STATUS\_REGISTER**
- volatile uint32\_t \* **gpioDataRegister**
- GpioPin\_t **gpioDataCommPin**
- uint8\_t **dataSize**
- bool **isEnabled**
- bool **isInit**

The documentation for this struct was generated from the following file:

- [SPI.c](#)

## 6.5 Timer\_t Struct Reference

### Data Fields

- const timerName\_t **NAME**
- const uint32\_t **BASE\_ADDR**
- register\_t **controlRegister**
- register\_t **intervalLoadRegister**
- register\_t **interruptClearRegister**
- bool **isInit**

The documentation for this struct was generated from the following file:

- [Timer.c](#)

## 6.6 Uart\_t Struct Reference

### Data Fields

- const uint32\_t **BASE\_ADDRESS**
- register\_t **FLAG\_R\_ADDRESS**
- GpioPort\_t **GPIO\_PORT**  
*pointer to GPIO port data structure*
- GpioPin\_t **RX\_PIN\_NUM**  
*GPIO pin number.*
- GpioPin\_t **TX\_PIN\_NUM**  
*GPIO pin number.*
- bool **isInit**

The documentation for this struct was generated from the following file:


- [UART.c](#)

## 7 File Documentation

### 7.1 DAQ.c File Reference

Source code for DAQ module.


Include dependency graph for DAQ.c:

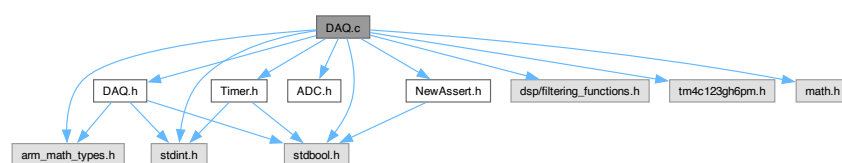


## 7.2 DAQ.h File Reference

Application software for handling data acquisition (DAQ) functions.

Include dependency graph for DAQ.h:

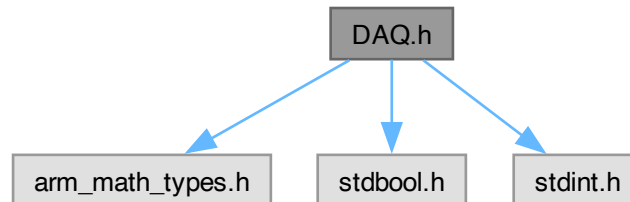

This graph shows which files directly or indirectly include this file:

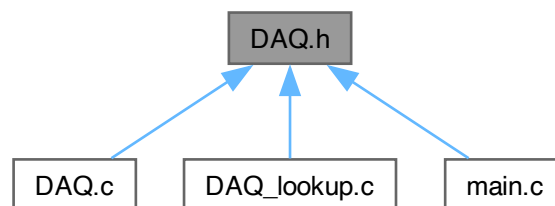


## 7.3 DAQ\_lookup.c File Reference

Source code for DAQ module's lookup table.




Include dependency graph for DAQ\_lookup.c:

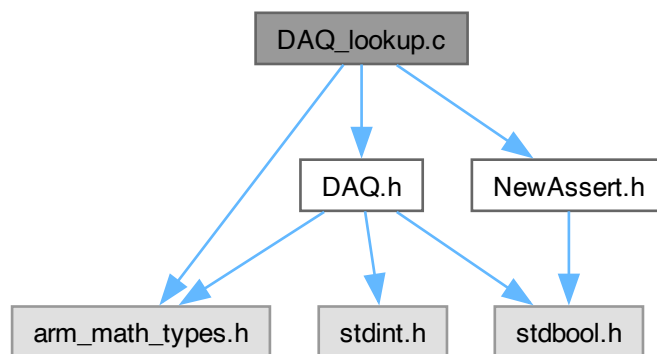

## 7.4 Font.c File Reference

Contains bitmaps for a selection of ASCII characters.


Include dependency graph for Font.c:



## 7.5 LCD.c File Reference

Source code for LCD module.


Include dependency graph for LCD.c:

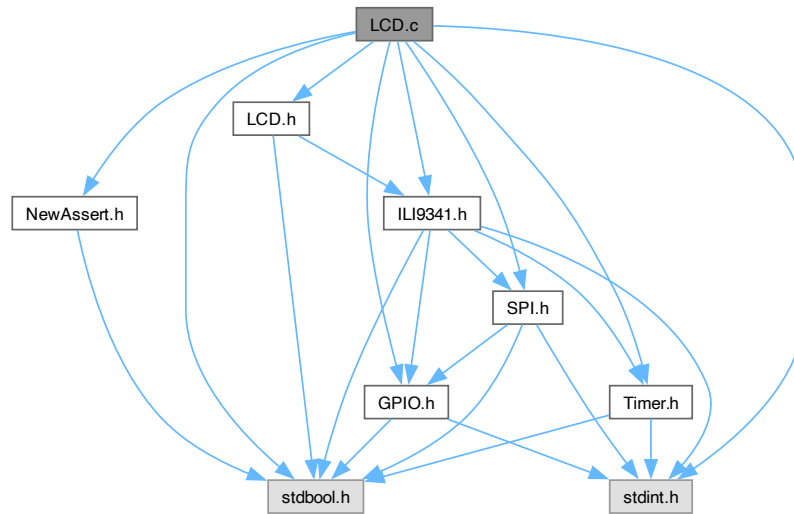


## 7.6 LCD.h File Reference

Header file for LCD module.

Include dependency graph for LCD.h:

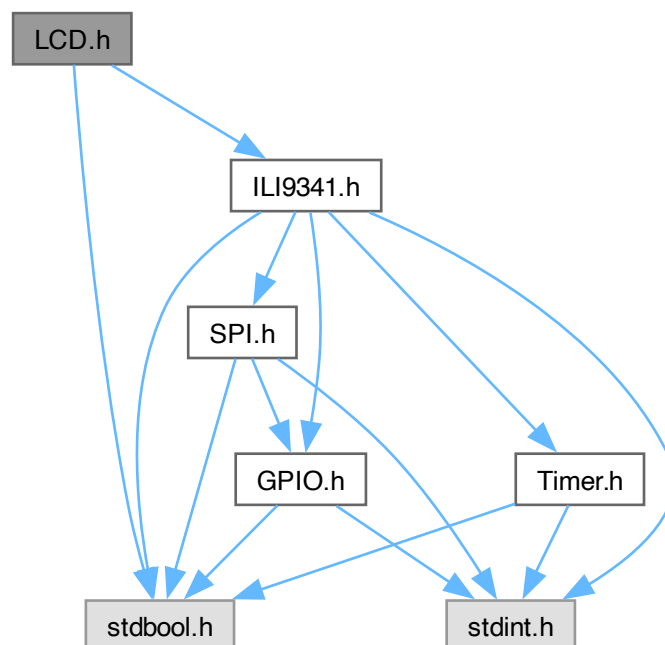

This graph shows which files directly or indirectly include this file:



## 7.7 QRS.c File Reference

Source code for QRS detection module.


Include dependency graph for `QRS.c`:




## 7.8 QRS.h File Reference

Header file for QRS detection module.

Include dependency graph for `QRS.h`:

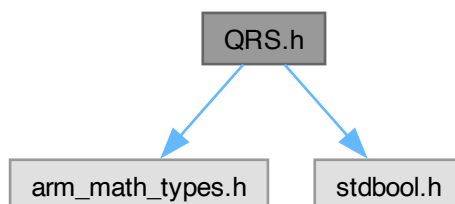


This graph shows which files directly or indirectly include this file:



## 7.9 Fifo.c File Reference

Source code for FIFO buffer module.


Include dependency graph for `Fifo.c`:

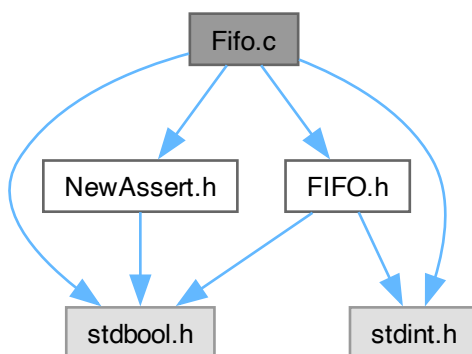


## 7.10 Fifo.h File Reference

Header file for FIFO buffer implementation.

Include dependency graph for `Fifo.h`:




This graph shows which files directly or indirectly include this file:

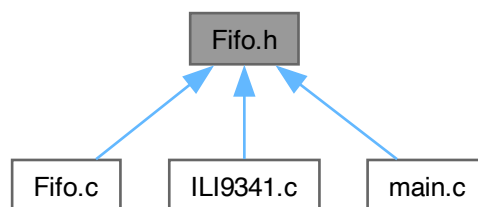

## 7.11 NewAssert.c File Reference

Source code for custom `assert` implementation.


Include dependency graph for `NewAssert.c`:

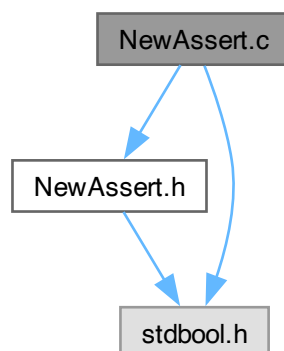


## 7.12 NewAssert.h File Reference

Header file for custom `assert` implementation.

Include dependency graph for NewAssert.h:




This graph shows which files directly or indirectly include this file:



## 7.13 ADC.c File Reference

Source code for analog-to-digital conversion (ADC) module.


Include dependency graph for ADC.c:

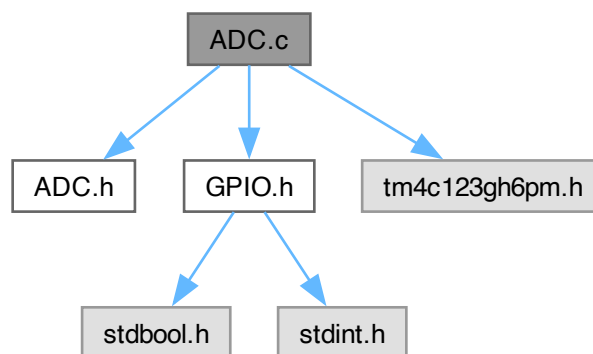

## 7.14 ADC.h File Reference

Header file for analog-to-digital conversion (ADC) module.


This graph shows which files directly or indirectly include this file:



## 7.15 GPIO.c File Reference

Source code for GPIO module.


Include dependency graph for `GPIO.c`:

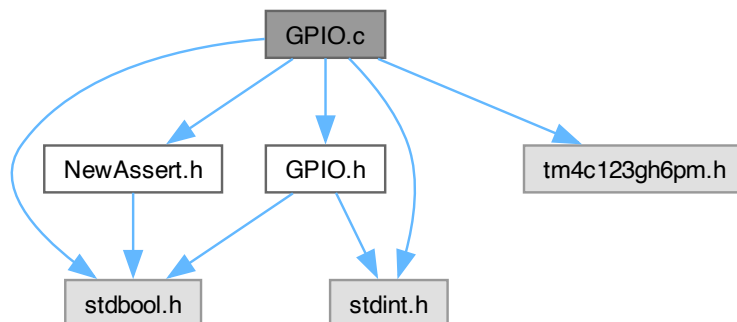


## 7.16 GPIO.h File Reference

Header file for general-purpose input/output (GPIO) device driver.

Include dependency graph for GPIO.h:




This graph shows which files directly or indirectly include this file:

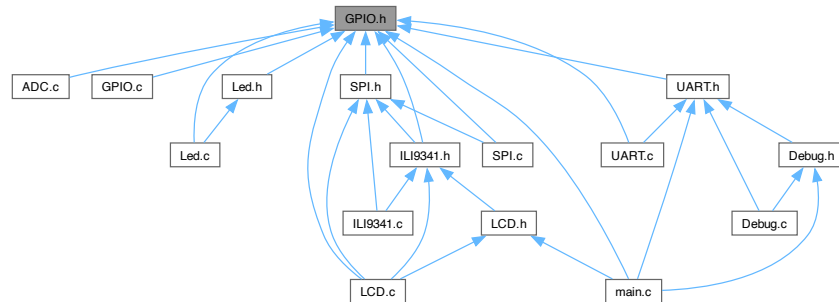

## 7.17 ISR.c File Reference

Source code for interrupt service routine (ISR) configuration module.

Include dependency graph for ISR.c:

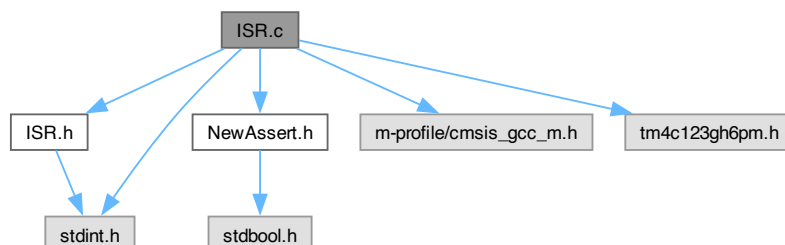





## 7.18 ISR.h File Reference

Header file for interrupt service routine (ISR) configuration module.

Include dependency graph for ISR.h:




This graph shows which files directly or indirectly include this file:



## 7.19 PLL.c File Reference

Implementation details for phase-lock-loop (PLL) functions.


Include dependency graph for PLL.c:

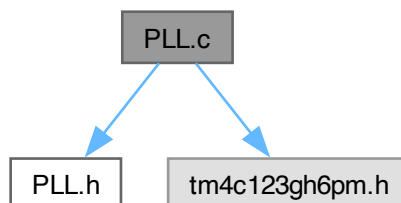

## 7.20 PLL.h File Reference

Driver module for activating the phase-locked-loop (PLL).


This graph shows which files directly or indirectly include this file:



## 7.21 SPI.c File Reference

Source code for serial peripheral interface (SPI) module.


Include dependency graph for `SPI.c`:

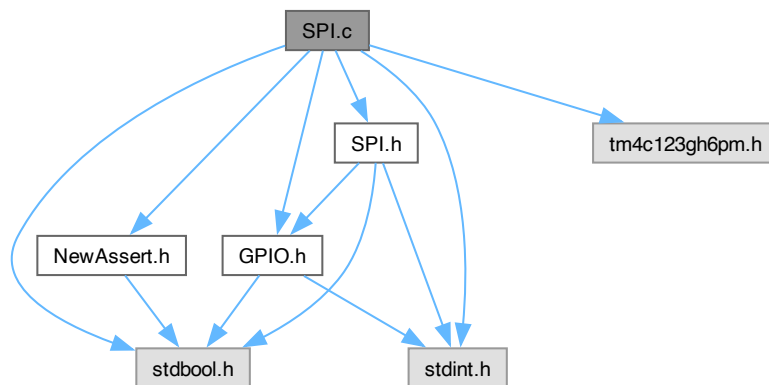


## 7.22 SPI.h File Reference

Header file for serial peripheral interface (SPI) module.

Include dependency graph for SPI.h:

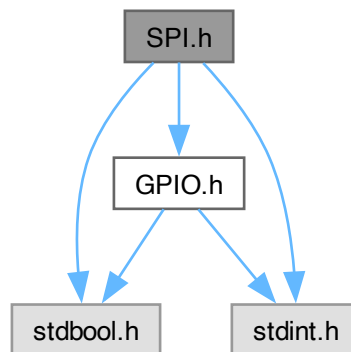


This graph shows which files directly or indirectly include this file:

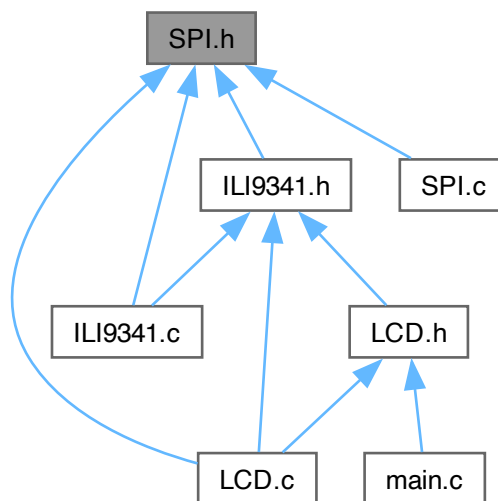

## 7.23 Timer.c File Reference

Source code for Timer module.


Include dependency graph for Timer.c:

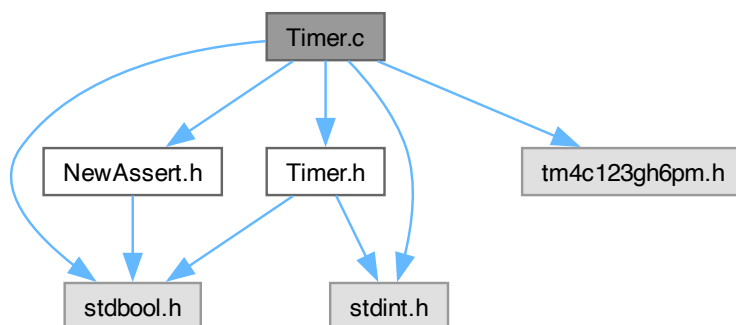


## 7.24 Timer.h File Reference

Device driver for general-purpose timer modules.

Include dependency graph for Timer.h:




This graph shows which files directly or indirectly include this file:

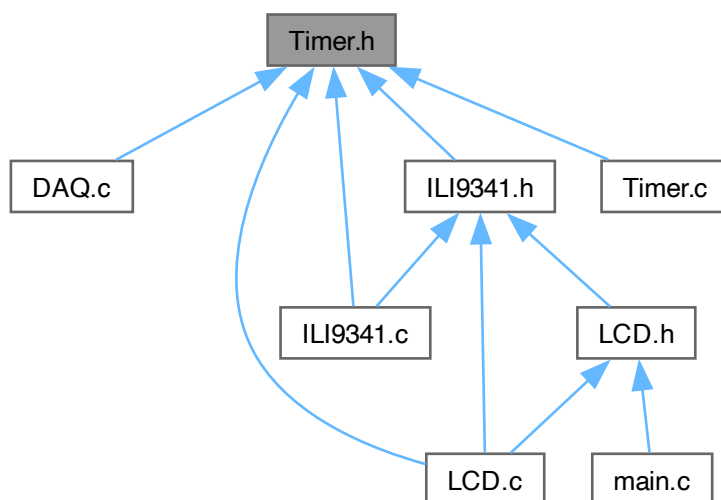

## 7.25 UART.c File Reference

Source code for UART module.


Include dependency graph for `UART.c`:

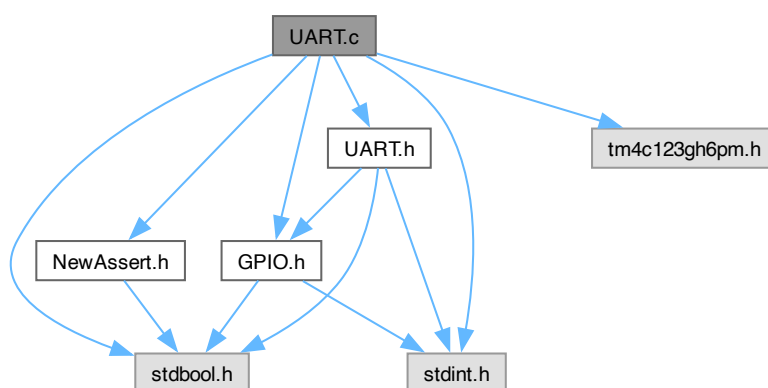


## 7.26 UART.h File Reference

Driver module for serial communication via UART0 and UART 1.

Include dependency graph for UART.h:

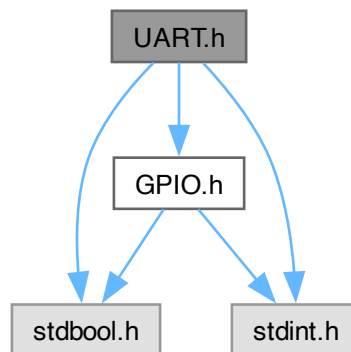


This graph shows which files directly or indirectly include this file:

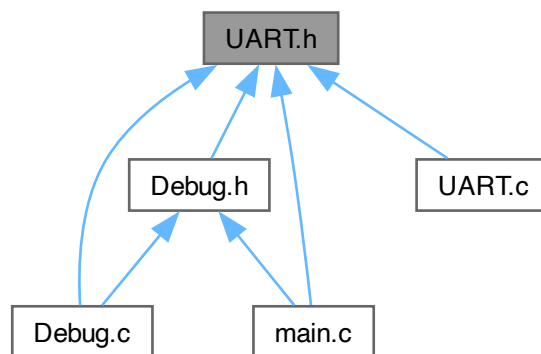

## 7.27 main.c File Reference

Main program file.


Include dependency graph for main.c:

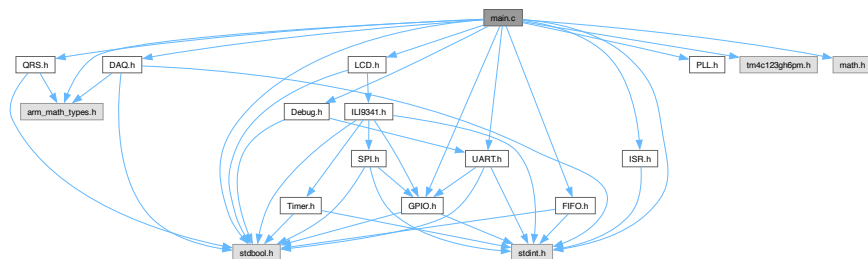

## 7.28 Debug.c File Reference

Source code for Debug module.


Include dependency graph for Debug.c:

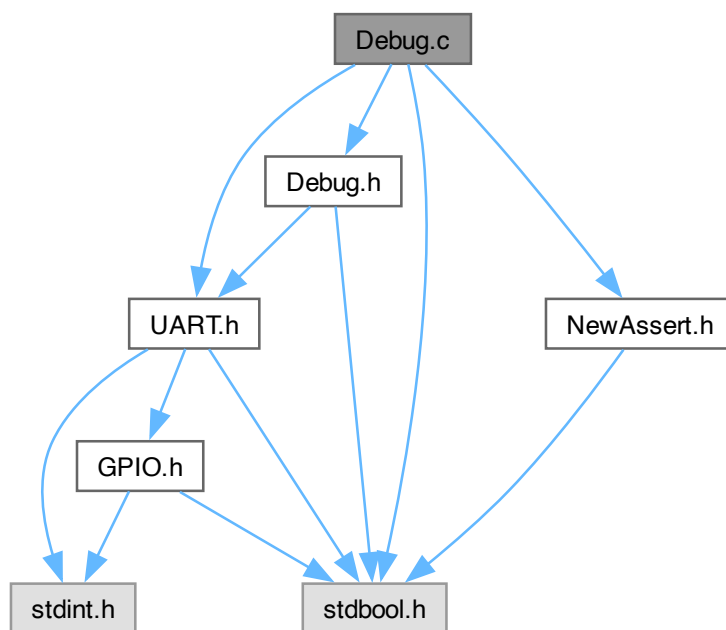


## 7.29 Debug.h File Reference

Header file for Debug module.

Include dependency graph for Debug.h:

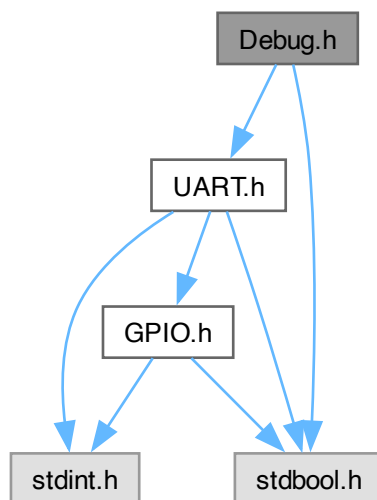

This graph shows which files directly or indirectly include this file:




## 7.30 ILI9341.c File Reference

Source code for ILI9341 module.




Include dependency graph for ILI9341.c:

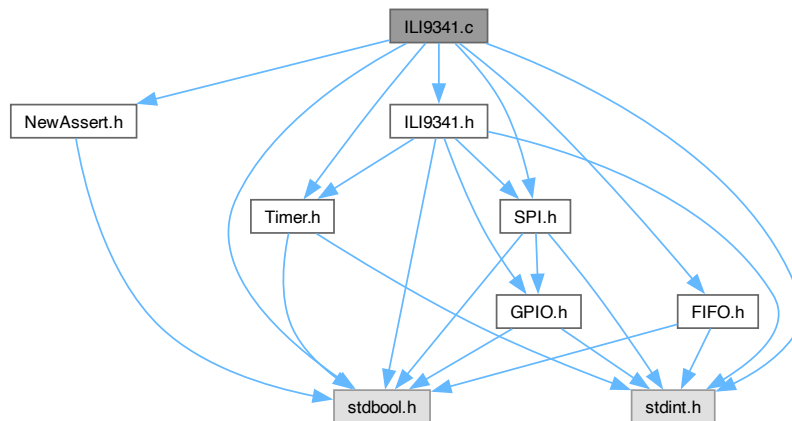


### 7.31 ILI9341.h File Reference

Driver module for interfacing with an ILI9341 LCD driver.

Include dependency graph for ILI9341.h:

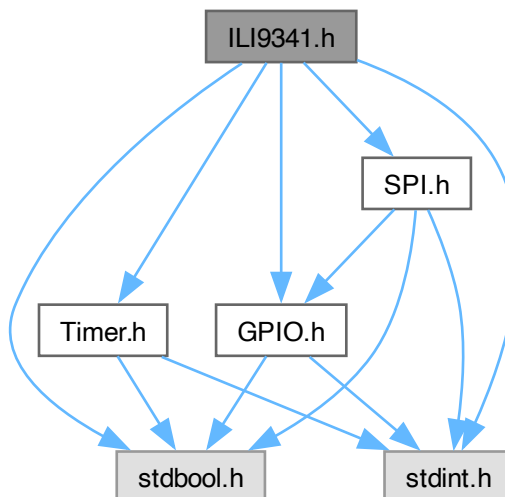


This graph shows which files directly or indirectly include this file:

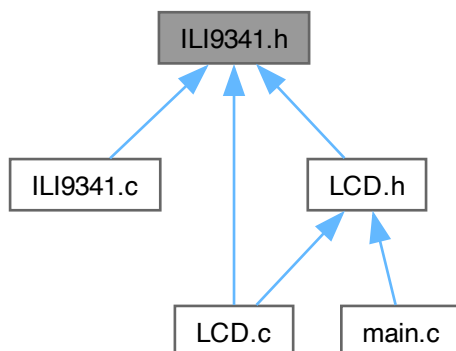

### 7.32 Led.c File Reference

Source code for LED module.


Include dependency graph for Led.c:

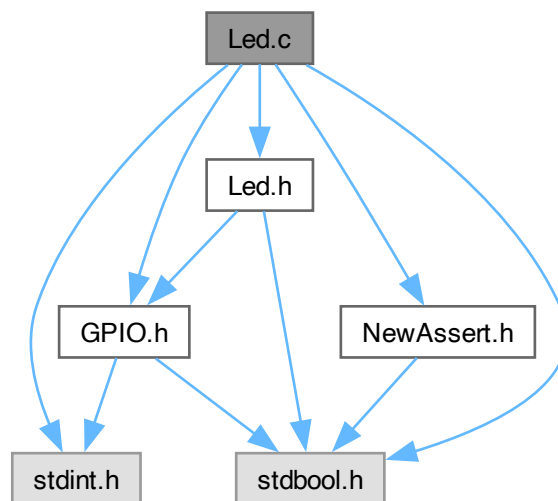

### 7.33 Led.h File Reference

Interface for LED module.

Include dependency graph for Led.h:

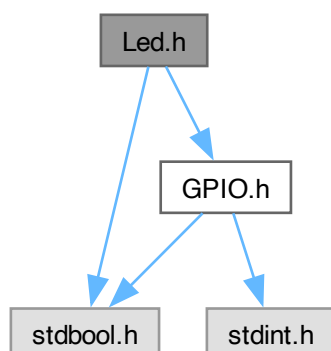

This graph shows which files directly or indirectly include this file:



## Index

- ADC.c, [131](#)
- ADC.h, [132](#)
- ADC\_Init
  - Analog-to-Digital Conversion (ADC), [89](#)
- Analog-to-Digital Conversion (ADC), [89](#)
  - ADC\_Init, [89](#)
- Application Software, [12](#)
- Assert
  - Common, [59](#)
- bandpassFiltStruct
  - Data Acquisition (DAQ), [18](#)
- CASET
  - ILI9341, [73](#)
- Cmd\_t
  - ILI9341, [73](#)
- COEFF\_BANDPASS
  - QRS Detector, [49](#)
- COEFF\_DERFILT
  - QRS Detector, [49](#)
- COEFF\_MOVAVG
  - QRS Detector, [49](#)
- COEFFS\_BANDPASS
  - Data Acquisition (DAQ), [18](#)
- COEFFS\_NOTCH
  - Data Acquisition (DAQ), [18](#)
- Common, [58](#)
  - Assert, [59](#)
- DAQ.c, [124](#)
- DAQ.h, [125](#)
- DAQ\_acknowledgeInterrupt
  - Data Acquisition (DAQ), [15](#)
- DAQ\_ARRAY\_LEN
  - Main, [52](#)
- DAQ\_BandpassFilter
  - Data Acquisition (DAQ), [16](#)
- DAQ\_convertToMilliVolts
  - Data Acquisition (DAQ), [17](#)
- DAQ\_FIFO\_CAP
  - Main, [52](#)
- DAQ\_Handler
  - Main, [52](#)
- DAQ\_Init
  - Data Acquisition (DAQ), [14](#)
- DAQ\_lookup.c, [125](#)
- DAQ\_NotchFilter
  - Data Acquisition (DAQ), [15](#)
- DAQ\_readSample
  - Data Acquisition (DAQ), [14](#)
- DAQ\_VECTOR\_NUM
  - Main, [52](#)
- Data Acquisition (DAQ), [13](#)
  - bandpassFiltStruct, [18](#)
  - COEFFS\_BANDPASS, [18](#)
  - COEFFS\_NOTCH, [18](#)
  - DAQ\_acknowledgeInterrupt, [15](#)
  - DAQ\_BandpassFilter, [16](#)
  - DAQ\_convertToMilliVolts, [17](#)
  - DAQ\_Init, [14](#)
  - DAQ\_NotchFilter, [15](#)
  - DAQ\_readSample, [14](#)
- Debug, [67](#)
  - Debug\_Assert, [70](#)
  - Debug\_Init, [68](#)
  - Debug\_SendFromList, [69](#)
  - Debug\_SendMsg, [69](#)
  - Debug\_WriteFloat, [70](#)
- Debug.c, [140](#)
- Debug.h, [140](#)
- Debug\_Assert
  - Debug, [70](#)
- Debug\_Init
  - Debug, [68](#)
- Debug\_SendFromList
  - Debug, [69](#)
- Debug\_SendMsg
  - Debug, [69](#)
- Debug\_WriteFloat
  - Debug, [70](#)
- Device Drivers, [88](#)
- DINVOFF
  - ILI9341, [73](#)
- DINVON
  - ILI9341, [73](#)
- DISPOFF
  - ILI9341, [73](#)
- DISPON
  - ILI9341, [73](#)
- DOWN
  - Timer, [107](#)
- FIFO Buffers, [60](#)
  - Fifo\_Flush, [63](#)
  - Fifo\_FlushFloat, [64](#)
  - Fifo\_Get, [62](#)
  - Fifo\_getCurrSize, [66](#)
  - Fifo\_GetFloat, [64](#)
  - Fifo\_Init, [61](#)
  - Fifo\_isEmpty, [66](#)
  - Fifo\_isFull, [66](#)
  - Fifo\_PeekAll, [65](#)
  - Fifo\_PeekOne, [65](#)
  - Fifo\_Put, [62](#)
  - Fifo\_PutFloat, [63](#)
  - Fifo\_Reset, [62](#)
- Fifo.c, [129](#)
- Fifo.h, [129](#)
- Fifo\_Flush
  - FIFO Buffers, [63](#)

- Fifo\_FlushFloat
  - FIFO Buffers, [64](#)
- Fifo\_Get
  - FIFO Buffers, [62](#)
- Fifo\_getCurrSize
  - FIFO Buffers, [66](#)
- Fifo\_GetFloat
  - FIFO Buffers, [64](#)
- FIFO\_INFO
  - Main, [52](#)
- Fifo\_Init
  - FIFO Buffers, [61](#)
- Fifo\_isEmpty
  - FIFO Buffers, [66](#)
- Fifo\_isFull
  - FIFO Buffers, [66](#)
- Fifo\_PeekAll
  - FIFO Buffers, [65](#)
- Fifo\_PeekOne
  - FIFO Buffers, [65](#)
- Fifo\_Put
  - FIFO Buffers, [62](#)
- Fifo\_PutFloat
  - FIFO Buffers, [63](#)
- Fifo\_Reset
  - FIFO Buffers, [62](#)
- Fifo\_t, [122](#)
- Font.c, [126](#)
- FONT\_0
  - Liquid Crystal Display (LCD), [27](#)
- FONT\_1
  - Liquid Crystal Display (LCD), [27](#)
- FONT\_2
  - Liquid Crystal Display (LCD), [27](#)
- FONT\_3
  - Liquid Crystal Display (LCD), [28](#)
- FONT\_4
  - Liquid Crystal Display (LCD), [28](#)
- FONT\_5
  - Liquid Crystal Display (LCD), [28](#)
- FONT\_6
  - Liquid Crystal Display (LCD), [28](#)
- FONT\_7
  - Liquid Crystal Display (LCD), [29](#)
- FONT\_8
  - Liquid Crystal Display (LCD), [29](#)
- FONT\_9
  - Liquid Crystal Display (LCD), [29](#)
- FONT\_COLON
  - Liquid Crystal Display (LCD), [27](#)
- FONT\_LOWER\_A
  - Liquid Crystal Display (LCD), [36](#)
- FONT\_LOWER\_B
  - Liquid Crystal Display (LCD), [36](#)
- FONT\_LOWER\_C
  - Liquid Crystal Display (LCD), [36](#)
- FONT\_LOWER\_D
  - Liquid Crystal Display (LCD), [37](#)
- FONT\_LOWER\_E
  - Liquid Crystal Display (LCD), [37](#)
- FONT\_LOWER\_F
  - Liquid Crystal Display (LCD), [37](#)
- FONT\_LOWER\_G
  - Liquid Crystal Display (LCD), [37](#)
- FONT\_LOWER\_H
  - Liquid Crystal Display (LCD), [38](#)
- FONT\_LOWER\_I
  - Liquid Crystal Display (LCD), [38](#)
- FONT\_LOWER\_J
  - Liquid Crystal Display (LCD), [38](#)
- FONT\_LOWER\_K
  - Liquid Crystal Display (LCD), [38](#)
- FONT\_LOWER\_L
  - Liquid Crystal Display (LCD), [39](#)
- FONT\_LOWER\_M
  - Liquid Crystal Display (LCD), [39](#)
- FONT\_LOWER\_N
  - Liquid Crystal Display (LCD), [39](#)
- FONT\_LOWER\_O
  - Liquid Crystal Display (LCD), [39](#)
- FONT\_LOWER\_P
  - Liquid Crystal Display (LCD), [40](#)
- FONT\_LOWER\_Q
  - Liquid Crystal Display (LCD), [40](#)
- FONT\_LOWER\_R
  - Liquid Crystal Display (LCD), [40](#)
- FONT\_LOWER\_S
  - Liquid Crystal Display (LCD), [40](#)
- FONT\_LOWER\_T
  - Liquid Crystal Display (LCD), [41](#)
- FONT\_LOWER\_U
  - Liquid Crystal Display (LCD), [41](#)
- FONT\_LOWER\_V
  - Liquid Crystal Display (LCD), [41](#)
- FONT\_LOWER\_W
  - Liquid Crystal Display (LCD), [41](#)
- FONT\_LOWER\_X
  - Liquid Crystal Display (LCD), [42](#)
- FONT\_LOWER\_Y
  - Liquid Crystal Display (LCD), [42](#)
- FONT\_LOWER\_Z
  - Liquid Crystal Display (LCD), [42](#)
- FONT\_PERIOD
  - Liquid Crystal Display (LCD), [26](#)
- FONT\_SPACE
  - Liquid Crystal Display (LCD), [26](#)
- FONT\_UPPER\_A
  - Liquid Crystal Display (LCD), [29](#)
- FONT\_UPPER\_B
  - Liquid Crystal Display (LCD), [30](#)
- FONT\_UPPER\_C
  - Liquid Crystal Display (LCD), [30](#)
- FONT\_UPPER\_D
  - Liquid Crystal Display (LCD), [30](#)
- FONT\_UPPER\_E
  - Liquid Crystal Display (LCD), [30](#)

- FONT\_UPPER\_F
  - Liquid Crystal Display (LCD), [31](#)
- FONT\_UPPER\_G
  - Liquid Crystal Display (LCD), [31](#)
- FONT\_UPPER\_H
  - Liquid Crystal Display (LCD), [31](#)
- FONT\_UPPER\_I
  - Liquid Crystal Display (LCD), [31](#)
- FONT\_UPPER\_J
  - Liquid Crystal Display (LCD), [32](#)
- FONT\_UPPER\_K
  - Liquid Crystal Display (LCD), [32](#)
- FONT\_UPPER\_L
  - Liquid Crystal Display (LCD), [32](#)
- FONT\_UPPER\_M
  - Liquid Crystal Display (LCD), [32](#)
- FONT\_UPPER\_N
  - Liquid Crystal Display (LCD), [33](#)
- FONT\_UPPER\_O
  - Liquid Crystal Display (LCD), [33](#)
- FONT\_UPPER\_P
  - Liquid Crystal Display (LCD), [33](#)
- FONT\_UPPER\_Q
  - Liquid Crystal Display (LCD), [33](#)
- FONT\_UPPER\_R
  - Liquid Crystal Display (LCD), [34](#)
- FONT\_UPPER\_S
  - Liquid Crystal Display (LCD), [34](#)
- FONT\_UPPER\_T
  - Liquid Crystal Display (LCD), [34](#)
- FONT\_UPPER\_U
  - Liquid Crystal Display (LCD), [34](#)
- FONT\_UPPER\_V
  - Liquid Crystal Display (LCD), [35](#)
- FONT\_UPPER\_W
  - Liquid Crystal Display (LCD), [35](#)
- FONT\_UPPER\_X
  - Liquid Crystal Display (LCD), [35](#)
- FONT\_UPPER\_Y
  - Liquid Crystal Display (LCD), [35](#)
- FONT\_UPPER\_Z
  - Liquid Crystal Display (LCD), [36](#)
- FRMCTR1
  - ILI9341, [73](#)
- FRMCTR2
  - ILI9341, [73](#)
- FRMCTR3
  - ILI9341, [73](#)
- General-Purpose Input/Output (GPIO), [90](#)
  - GPIO\_AFSEL\_R\_OFFSET, [92](#)
  - GPIO\_AMSEL\_R\_OFFSET, [92](#)
  - GPIO\_COMMIT\_R\_OFFSET, [92](#)
  - GPIO\_ConfigAltMode, [98](#)
  - GPIO\_ConfigAnalog, [99](#)
  - GPIO\_configDirection, [93](#)
  - GPIO\_ConfigDriveStrength, [95](#)
  - GPIO\_ConfigInterrupts\_BothEdges, [96](#)
  - GPIO\_ConfigInterrupts\_Edge, [96](#)
  - GPIO\_ConfigInterrupts\_LevelTrig, [96](#)
  - GPIO\_ConfigNVIC, [96](#)
  - GPIO\_ConfigPortCtrl, [98](#)
  - GPIO\_configResistor, [94](#)
  - GPIO\_DATA\_R\_OFFSET, [92](#)
  - GPIO\_DEN\_R\_OFFSET, [92](#)
  - GPIO\_DIR\_R\_OFFSET, [92](#)
  - GPIO\_DisableDigital, [95](#)
  - GPIO\_DR2R\_R\_OFFSET, [92](#)
  - GPIO\_DR4R\_R\_OFFSET, [92](#)
  - GPIO\_DR8R\_R\_OFFSET, [92](#)
  - GPIO\_EnableDigital, [95](#)
  - GPIO\_getBaseAddr, [93](#)
  - GPIO\_getDataRegister, [97](#)
  - GPIO\_IBE\_R\_OFFSET, [92](#)
  - GPIO\_ICR\_R\_OFFSET, [92](#)
  - GPIO\_IEV\_R\_OFFSET, [92](#)
  - GPIO\_IM\_R\_OFFSET, [92](#)
  - GPIO\_InitPort, [93](#)
  - GPIO\_IS\_R\_OFFSET, [92](#)
  - GPIO\_isPortInit, [93](#)
  - GPIO\_LAUNCHPAD\_LEDS, [92](#)
  - GPIO\_LOCK\_R\_OFFSET, [92](#)
  - GPIO\_PCTL\_R\_OFFSET, [92](#)
  - GPIO\_PDR\_R\_OFFSET, [92](#)
  - GPIO\_PTR\_ARR, [99](#)
  - GPIO\_PUR\_R\_OFFSET, [92](#)
  - GPIO\_ReadPins, [97](#)
  - GPIO\_REGISTER\_OFFSETS, [92](#)
  - GPIO\_Toggle, [98](#)
  - GPIO\_WriteHigh, [97](#)
  - GPIO\_WriteLow, [97](#)
  - LED\_BLUE, [93](#)
  - LED\_GREEN, [93](#)
  - LED\_RED, [92](#)
- GPIO.c, [132](#)
- GPIO.h, [132](#)
- GPIO\_AFSEL\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_AMSEL\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_COMMIT\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_ConfigAltMode
  - General-Purpose Input/Output (GPIO), [98](#)
- GPIO\_ConfigAnalog
  - General-Purpose Input/Output (GPIO), [99](#)
- GPIO\_configDirection
  - General-Purpose Input/Output (GPIO), [93](#)
- GPIO\_ConfigDriveStrength
  - General-Purpose Input/Output (GPIO), [95](#)
- GPIO\_ConfigInterrupts\_BothEdges
  - General-Purpose Input/Output (GPIO), [96](#)
- GPIO\_ConfigInterrupts\_Edge
  - General-Purpose Input/Output (GPIO), [96](#)
- GPIO\_ConfigInterrupts\_LevelTrig
  - General-Purpose Input/Output (GPIO), [96](#)
- GPIO\_ConfigNVIC

- General-Purpose Input/Output (GPIO), [96](#)
- GPIO\_ConfigPortCtrl
  - General-Purpose Input/Output (GPIO), [98](#)
- GPIO\_configResistor
  - General-Purpose Input/Output (GPIO), [94](#)
- GPIO\_DATA\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_DEN\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_DIR\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_DisableDigital
  - General-Purpose Input/Output (GPIO), [95](#)
- GPIO\_DR2R\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_DR4R\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_DR8R\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_EnableDigital
  - General-Purpose Input/Output (GPIO), [95](#)
- GPIO\_getBaseAddr
  - General-Purpose Input/Output (GPIO), [93](#)
- GPIO\_getDataRegister
  - General-Purpose Input/Output (GPIO), [97](#)
- GPIO\_IBE\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_ICR\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_IEV\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_IM\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_InitPort
  - General-Purpose Input/Output (GPIO), [93](#)
- GPIO\_IS\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_isPortInit
  - General-Purpose Input/Output (GPIO), [93](#)
- GPIO\_LAUNCHPAD\_LEDS
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_LOCK\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_PCTL\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_PDR\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_PTR\_ARR
  - General-Purpose Input/Output (GPIO), [99](#)
- GPIO\_PUR\_R\_OFFSET
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_ReadPins
  - General-Purpose Input/Output (GPIO), [97](#)
- GPIO\_REGISTER\_OFFSETS
  - General-Purpose Input/Output (GPIO), [92](#)
- GPIO\_Toggle
  - General-Purpose Input/Output (GPIO), [98](#)
- GPIO\_WriteHigh
  - General-Purpose Input/Output (GPIO), [97](#)
- GPIO\_WriteLow
  - General-Purpose Input/Output (GPIO), [97](#)
- GpioPort\_t, [123](#)
- IDMOFF
  - ILI9341, [73](#)
- IDMON
  - ILI9341, [73](#)
- IFCTL
  - ILI9341, [73](#)
- ILI9341, [71](#)
  - CASET, [73](#)
  - Cmd\_t, [73](#)
  - DINVOFF, [73](#)
  - DINVON, [73](#)
  - DISPOFF, [73](#)
  - DISPON, [73](#)
  - FRMCTR1, [73](#)
  - FRMCTR2, [73](#)
  - FRMCTR3, [73](#)
  - IDMOFF, [73](#)
  - IDMON, [73](#)
  - IFCTL, [73](#)
  - ili9341, [83](#)
  - ILI9341\_Init, [74](#)
  - ILI9341\_NUM\_COLS, [73](#)
  - ILI9341\_NUM\_ROWS, [73](#)
  - ILI9341\_resetHard, [76](#)
  - ILI9341\_resetSoft, [77](#)
  - ILI9341\_sendParams, [74](#)
  - ILI9341\_setAddress, [74](#)
  - ILI9341\_setColAddress, [81](#)
  - ILI9341\_setColorDepth, [80](#)
  - ILI9341\_setColorExpression, [78](#)
  - ILI9341\_setDisplInversion, [79](#)
  - ILI9341\_setDisplayArea, [77](#)
  - ILI9341\_setDispOutput, [79](#)
  - ILI9341 setFrameRate, [80](#)
  - ILI9341\_setInterface, [76](#)
  - ILI9341\_setMemAccessCtrl, [79](#)
  - ILI9341\_setMode, [74](#)
  - ILI9341\_setPartialArea, [78](#)
  - ILI9341\_setRowAddress, [80](#)
  - ILI9341\_setSleepMode, [77](#)
  - ILI9341\_writeMemCmd, [82](#)
  - ILI9341\_writePixel, [82](#)
- MADCTL, [73](#)
- NOP, [73](#)
- NORON, [73](#)
- PASET, [73](#)
- PIXSET, [73](#)
- PLTAR, [73](#)
- PRCTR, [73](#)
- PTLON, [73](#)
- RAMWR, [73](#)
- SPLIN, [73](#)
- SPLOUT, [73](#)
- SWRESET, [73](#)

- VSCRDEF, [73](#)
- VSCRSADD, [73](#)
- ili9341
  - ILI9341, [83](#)
  - ILI9341.c, [141](#)
  - ILI9341.h, [142](#)
  - ILI9341\_Init
    - ILI9341, [74](#)
  - ILI9341\_NUM\_COLS
    - ILI9341, [73](#)
  - ILI9341\_NUM\_ROWS
    - ILI9341, [73](#)
  - ILI9341\_resetHard
    - ILI9341, [76](#)
  - ILI9341\_resetSoft
    - ILI9341, [77](#)
  - ILI9341\_sendParams
    - ILI9341, [74](#)
  - ILI9341\_setAddress
    - ILI9341, [74](#)
  - ILI9341\_setColAddress
    - ILI9341, [81](#)
  - ILI9341\_setColorDepth
    - ILI9341, [80](#)
  - ILI9341\_setColorExpression
    - ILI9341, [78](#)
  - ILI9341\_setDisplInversion
    - ILI9341, [79](#)
  - ILI9341\_setDisplayArea
    - ILI9341, [77](#)
  - ILI9341\_setDispOutput
    - ILI9341, [79](#)
  - ILI9341\_setFrameRate
    - ILI9341, [80](#)
  - ILI9341\_setInterface
    - ILI9341, [76](#)
  - ILI9341\_setMemAccessCtrl
    - ILI9341, [79](#)
  - ILI9341\_setMode
    - ILI9341, [74](#)
  - ILI9341\_setPartialArea
    - ILI9341, [78](#)
  - ILI9341\_setRowAddress
    - ILI9341, [80](#)
  - ILI9341\_setSleepMode
    - ILI9341, [77](#)
  - ILI9341\_writeMemCmd
    - ILI9341, [82](#)
  - ILI9341\_writePixel
    - ILI9341, [82](#)
- Interrupt Service Routines, [118](#)
  - ISR\_addToIntTable, [120](#)
  - ISR\_Disable, [121](#)
  - ISR\_Enable, [121](#)
  - ISR\_GlobalDisable, [119](#)
  - ISR\_GlobalEnable, [119](#)
  - ISR\_InitNewTableInRam, [119](#)
  - ISR\_setPriority, [120](#)
- ISR\_triggerInterrupt, [122](#)
- ISR.c, [133](#)
- ISR.h, [134](#)
- ISR\_addToIntTable
  - Interrupt Service Routines, [120](#)
- ISR\_Disable
  - Interrupt Service Routines, [121](#)
- ISR\_Enable
  - Interrupt Service Routines, [121](#)
- ISR\_GlobalDisable
  - Interrupt Service Routines, [119](#)
- ISR\_GlobalEnable
  - Interrupt Service Routines, [119](#)
- ISR\_InitNewTableInRam
  - Interrupt Service Routines, [119](#)
- ISR\_setPriority
  - Interrupt Service Routines, [120](#)
- ISR\_triggerInterrupt
  - Interrupt Service Routines, [122](#)
- ISR\_VECTOR\_NUMS
  - Main, [51](#)
- LCD.c, [126](#)
- LCD.h, [127](#)
- LCD\_ARRAY\_1\_LEN
  - Main, [52](#)
- LCD\_ARRAY\_2\_LEN
  - Main, [52](#)
- LCD\_Draw
  - Liquid Crystal Display (LCD), [23](#)
- LCD\_drawHoriLine
  - Liquid Crystal Display (LCD), [24](#)
- LCD\_drawLine
  - Liquid Crystal Display (LCD), [22](#)
- LCD\_drawRectangle
  - Liquid Crystal Display (LCD), [25](#)
- LCD\_drawVertLine
  - Liquid Crystal Display (LCD), [25](#)
- LCD\_FIFO\_1\_CAP
  - Main, [52](#)
- LCD\_FIFO\_2\_CAP
  - Main, [52](#)
- LCD\_Fill
  - Liquid Crystal Display (LCD), [24](#)
- LCD\_Handler
  - Main, [54](#)
- LCD\_INFO
  - Main, [52](#)
- LCD\_Init
  - Liquid Crystal Display (LCD), [22](#)
- LCD\_plotSample
  - Liquid Crystal Display (LCD), [26](#)
- LCD\_setColor
  - Liquid Crystal Display (LCD), [23](#)
- LCD\_setCursor
  - Liquid Crystal Display (LCD), [26](#)
- LCD\_setOutputMode
  - Liquid Crystal Display (LCD), [22](#)
- LCD\_setX



- Liquid Crystal Display (LCD), [22](#)
- LCD\_setY
  - Liquid Crystal Display (LCD), [23](#)
- LCD\_TEXT\_COL\_NUM
  - Main, [52](#)
- LCD\_TEXT\_LINE\_NUM
  - Main, [52](#)
- LCD\_TOP\_LINE
  - Main, [52](#)
- LCD\_VECTOR\_NUM
  - Main, [52](#)
- LCD\_WAVE\_NUM\_Y
  - Main, [52](#)
- LCD\_WAVE\_X\_OFFSET
  - Main, [52](#)
- LCD\_WAVE\_Y\_MAX
  - Main, [52](#)
- LCD\_WAVE\_Y\_MIN
  - Main, [52](#)
- LED, [83](#)
  - Led\_GetPin, [85](#)
  - Led\_GetPort, [84](#)
  - Led\_Init, [84](#)
  - Led\_isInit, [85](#)
  - Led\_isOn, [86](#)
  - Led\_Toggle, [87](#)
  - Led\_TurnOff, [87](#)
  - Led\_TurnOn, [86](#)
- Led.c, [143](#)
- Led.h, [143](#)
- LED\_BLUE
  - General-Purpose Input/Output (GPIO), [93](#)
- Led\_GetPin
  - LED, [85](#)
- Led\_GetPort
  - LED, [84](#)
- LED\_GREEN
  - General-Purpose Input/Output (GPIO), [93](#)
- Led\_Init
  - LED, [84](#)
- Led\_isInit
  - LED, [85](#)
- Led\_isOn
  - LED, [86](#)
- LED\_RED
  - General-Purpose Input/Output (GPIO), [92](#)
- Led\_t, [123](#)
- Led\_Toggle
  - LED, [87](#)
- Led\_TurnOff
  - LED, [87](#)
- Led\_TurnOn
  - LED, [86](#)
- Liquid Crystal Display (LCD), [18](#)
  - FONT\_0, [27](#)
  - FONT\_1, [27](#)
  - FONT\_2, [27](#)
  - FONT\_3, [28](#)
  - FONT\_4, [28](#)
  - FONT\_5, [28](#)
  - FONT\_6, [28](#)
  - FONT\_7, [29](#)
  - FONT\_8, [29](#)
  - FONT\_9, [29](#)
  - FONT\_COLON, [27](#)
  - FONT\_LOWER\_A, [36](#)
  - FONT\_LOWER\_B, [36](#)
  - FONT\_LOWER\_C, [36](#)
  - FONT\_LOWER\_D, [37](#)
  - FONT\_LOWER\_E, [37](#)
  - FONT\_LOWER\_F, [37](#)
  - FONT\_LOWER\_G, [37](#)
  - FONT\_LOWER\_H, [38](#)
  - FONT\_LOWER\_I, [38](#)
  - FONT\_LOWER\_J, [38](#)
  - FONT\_LOWER\_K, [38](#)
  - FONT\_LOWER\_L, [39](#)
  - FONT\_LOWER\_M, [39](#)
  - FONT\_LOWER\_N, [39](#)
  - FONT\_LOWER\_O, [39](#)
  - FONT\_LOWER\_P, [40](#)
  - FONT\_LOWER\_Q, [40](#)
  - FONT\_LOWER\_R, [40](#)
  - FONT\_LOWER\_S, [40](#)
  - FONT\_LOWER\_T, [41](#)
  - FONT\_LOWER\_U, [41](#)
  - FONT\_LOWER\_V, [41](#)
  - FONT\_LOWER\_W, [41](#)
  - FONT\_LOWER\_X, [42](#)
  - FONT\_LOWER\_Y, [42](#)
  - FONT\_LOWER\_Z, [42](#)
  - FONT\_PERIOD, [26](#)
  - FONT\_SPACE, [26](#)
  - FONT\_UPPER\_A, [29](#)
  - FONT\_UPPER\_B, [30](#)
  - FONT\_UPPER\_C, [30](#)
  - FONT\_UPPER\_D, [30](#)
  - FONT\_UPPER\_E, [30](#)
  - FONT\_UPPER\_F, [31](#)
  - FONT\_UPPER\_G, [31](#)
  - FONT\_UPPER\_H, [31](#)
  - FONT\_UPPER\_I, [31](#)
  - FONT\_UPPER\_J, [32](#)
  - FONT\_UPPER\_K, [32](#)
  - FONT\_UPPER\_L, [32](#)
  - FONT\_UPPER\_M, [32](#)
  - FONT\_UPPER\_N, [33](#)
  - FONT\_UPPER\_O, [33](#)
  - FONT\_UPPER\_P, [33](#)
  - FONT\_UPPER\_Q, [33](#)
  - FONT\_UPPER\_R, [34](#)
  - FONT\_UPPER\_S, [34](#)
  - FONT\_UPPER\_T, [34](#)
  - FONT\_UPPER\_U, [34](#)
  - FONT\_UPPER\_V, [35](#)
  - FONT\_UPPER\_W, [35](#)

- FONT\_UPPER\_X, [35](#)
- FONT\_UPPER\_Y, [35](#)
- FONT\_UPPER\_Z, [36](#)
- LCD\_Draw, [23](#)
- LCD\_drawHoriLine, [24](#)
- LCD\_drawLine, [22](#)
- LCD\_drawRectangle, [25](#)
- LCD\_drawVertLine, [25](#)
- LCD\_Fill, [24](#)
- LCD\_Init, [22](#)
- LCD\_plotSample, [26](#)
- LCD\_setColor, [23](#)
- LCD\_setCursor, [26](#)
- LCD\_setOutputMode, [22](#)
- LCD\_setX, [22](#)
- LCD\_setY, [23](#)
- MADCTL
  - ILI9341, [73](#)
- Main, [49](#)
  - DAQ\_ARRAY\_LEN, [52](#)
  - DAQ\_FIFO\_CAP, [52](#)
  - DAQ\_Handler, [52](#)
  - DAQ\_VECTOR\_NUM, [52](#)
  - FIFO\_INFO, [52](#)
  - ISR\_VECTOR\_NUMS, [51](#)
  - LCD\_ARRAY\_1\_LEN, [52](#)
  - LCD\_ARRAY\_2\_LEN, [52](#)
  - LCD\_FIFO\_1\_CAP, [52](#)
  - LCD\_FIFO\_2\_CAP, [52](#)
  - LCD\_Handler, [54](#)
  - LCD\_INFO, [52](#)
  - LCD\_TEXT\_COL\_NUM, [52](#)
  - LCD\_TEXT\_LINE\_NUM, [52](#)
  - LCD\_TOP\_LINE, [52](#)
  - LCD\_VECTOR\_NUM, [52](#)
  - LCD\_WAVE\_NUM\_Y, [52](#)
  - LCD\_WAVE\_X\_OFFSET, [52](#)
  - LCD\_WAVE\_Y\_MAX, [52](#)
  - LCD\_WAVE\_Y\_MIN, [52](#)
  - main, [55](#)
  - PROC\_VECTOR\_NUM, [52](#)
  - Processing\_Handler, [53](#)
  - QRS\_ARRAY\_LEN, [52](#)
  - QRS\_FIFO\_CAP, [52](#)
- main
  - Main, [55](#)
- main.c, [139](#)
- Middleware, [67](#)
- NewAssert, [67](#)
- NewAssert.c, [130](#)
- NewAssert.h, [131](#)
- NOP
  - ILI9341, [73](#)
- NORON
  - ILI9341, [73](#)
- ONESHOT
  - Timer, [107](#)
- PASET
  - ILI9341, [73](#)
- PERIODIC
  - Timer, [107](#)
- Phase-Locked Loop (PLL), [99](#)
  - PLL\_Init, [100](#)
- PIXSET
  - ILI9341, [73](#)
- PLL.c, [134](#)
- PLL.h, [135](#)
- PLL\_Init
  - Phase-Locked Loop (PLL), [100](#)
- PLTAR
  - ILI9341, [73](#)
- PRCTR
  - ILI9341, [73](#)
- PROC\_VECTOR\_NUM
  - Main, [52](#)
- Processing\_Handler
  - Main, [53](#)
- PTLON
  - ILI9341, [73](#)
- QRS Detector, [43](#)
  - COEFF\_BANDPASS, [49](#)
  - COEFF\_DERFILT, [49](#)
  - COEFF\_MOVAVG, [49](#)
  - QRS\_applyDecisionRules, [48](#)
  - QRS\_findFiducialMarks, [44](#)
  - QRS\_Init, [46](#)
  - QRS\_initLevels, [45](#)
  - QRS\_Preprocess, [46](#)
  - QRS\_runDetection, [48](#)
  - QRS\_updateLevel, [45](#)
  - QRS\_updateThreshold, [46](#)
- QRS.c, [128](#)
- QRS.h, [128](#)
- QRS\_applyDecisionRules
  - QRS Detector, [48](#)
- QRS\_ARRAY\_LEN
  - Main, [52](#)
- QRS\_FIFO\_CAP
  - Main, [52](#)
- QRS\_findFiducialMarks
  - QRS Detector, [44](#)
- QRS\_Init
  - QRS Detector, [46](#)
- QRS\_initLevels
  - QRS Detector, [45](#)
- QRS\_Preprocess
  - QRS Detector, [46](#)
- QRS\_runDetection
  - QRS Detector, [48](#)
- QRS\_updateLevel
  - QRS Detector, [45](#)
- QRS\_updateThreshold
  - QRS Detector, [46](#)

- RAMWR
  - ILI9341, 73
- Serial Peripheral Interface (SPI), 100
  - SPI\_ARR, 105
  - SPI\_configClock, 102
  - SPI\_Disable, 103
  - SPI\_Enable, 103
  - SPI\_Init, 101
  - SPI\_isInit, 101
  - SPI\_Read, 103
  - SPI\_setDataSize, 102
  - SPI\_WriteCmd, 104
  - SPI\_WriteData, 104
- SPI.c, 135
- SPI.h, 135
- SPI\_ARR
  - Serial Peripheral Interface (SPI), 105
- SPI\_configClock
  - Serial Peripheral Interface (SPI), 102
- SPI\_Disable
  - Serial Peripheral Interface (SPI), 103
- SPI\_Enable
  - Serial Peripheral Interface (SPI), 103
- SPI\_Init
  - Serial Peripheral Interface (SPI), 101
- SPI\_isInit
  - Serial Peripheral Interface (SPI), 101
- SPI\_Read
  - Serial Peripheral Interface (SPI), 103
- SPI\_setDataSize
  - Serial Peripheral Interface (SPI), 102
- Spi\_t, 123
- SPI\_WriteCmd
  - Serial Peripheral Interface (SPI), 104
- SPI\_WriteData
  - Serial Peripheral Interface (SPI), 104
- SPLIN
  - ILI9341, 73
- SPLOUT
  - ILI9341, 73
- SWRESET
  - ILI9341, 73
- Timer, 105
  - DOWN, 107
  - ONESHOT, 107
  - PERIODIC, 107
  - Timer\_clearInterruptFlag, 111
  - Timer\_Deinit, 107
  - Timer\_disableAdcTrigger, 109
  - Timer\_disableInterruptOnTimeout, 110
  - Timer\_enableAdcTrigger, 109
  - Timer\_enableInterruptOnTimeout, 110
  - Timer\_getName, 108
  - Timer\_Init, 107
  - Timer\_isCounting, 112
  - Timer\_isInit, 108
  - TIMER\_POOL, 113
  - Timer\_setInterval\_ms, 111
  - Timer\_setMode, 108
  - Timer\_Start, 111
  - Timer\_Stop, 112
  - Timer\_Wait1ms, 113
  - timerDirection\_t, 107
  - timerMode\_t, 107
  - UP, 107
- Timer.c, 136
- Timer.h, 137
- Timer\_clearInterruptFlag
  - Timer, 111
- Timer\_Deinit
  - Timer, 107
- Timer\_disableAdcTrigger
  - Timer, 109
- Timer\_disableInterruptOnTimeout
  - Timer, 110
- Timer\_enableAdcTrigger
  - Timer, 109
- Timer\_enableInterruptOnTimeout
  - Timer, 110
- Timer\_getName
  - Timer, 108
- Timer\_Init
  - Timer, 107
- Timer\_isCounting
  - Timer, 112
- Timer\_isInit
  - Timer, 108
- TIMER\_POOL
  - Timer, 113
- Timer\_setInterval\_ms
  - Timer, 111
- Timer\_setMode
  - Timer, 108
- Timer\_Start
  - Timer, 111
- Timer\_Stop
  - Timer, 112
- Timer\_t, 124
- Timer\_Wait1ms
  - Timer, 113
- timerDirection\_t
  - Timer, 107
- timerMode\_t
  - Timer, 107
- UART.c, 138
- UART.h, 138
- UART\_ARR
  - Universal Asynchronous Receiver/Transmitter (UART), 117
- UART\_Init
  - Universal Asynchronous Receiver/Transmitter (UART), 115
- UART\_isInit
  - Universal Asynchronous Receiver/Transmitter (UART), 115

UART\_ReadChar  
    Universal Asynchronous Receiver/Transmitter  
        (UART), [116](#)

Uart\_t, [124](#)

UART\_WriteChar  
    Universal Asynchronous Receiver/Transmitter  
        (UART), [116](#)

UART\_WriteFloat  
    Universal Asynchronous Receiver/Transmitter  
        (UART), [117](#)

UART\_WriteInt  
    Universal Asynchronous Receiver/Transmitter  
        (UART), [117](#)

UART\_WriteStr  
    Universal Asynchronous Receiver/Transmitter  
        (UART), [116](#)

uHeartMonitor: An ECG-based Heart Rate Monitor, [1](#)

Universal Asynchronous Receiver/Transmitter (UART),  
    [114](#)  
    UART\_ARR, [117](#)  
    UART\_Init, [115](#)  
    UART\_isInit, [115](#)  
    UART\_ReadChar, [116](#)  
    UART\_WriteChar, [116](#)  
    UART\_WriteFloat, [117](#)  
    UART\_WriteInt, [117](#)  
    UART\_WriteStr, [116](#)

UP  
    Timer, [107](#)

VSCRDEF  
    ILI9341, [73](#)

VSCRSADD  
    ILI9341, [73](#)