


STEP 6

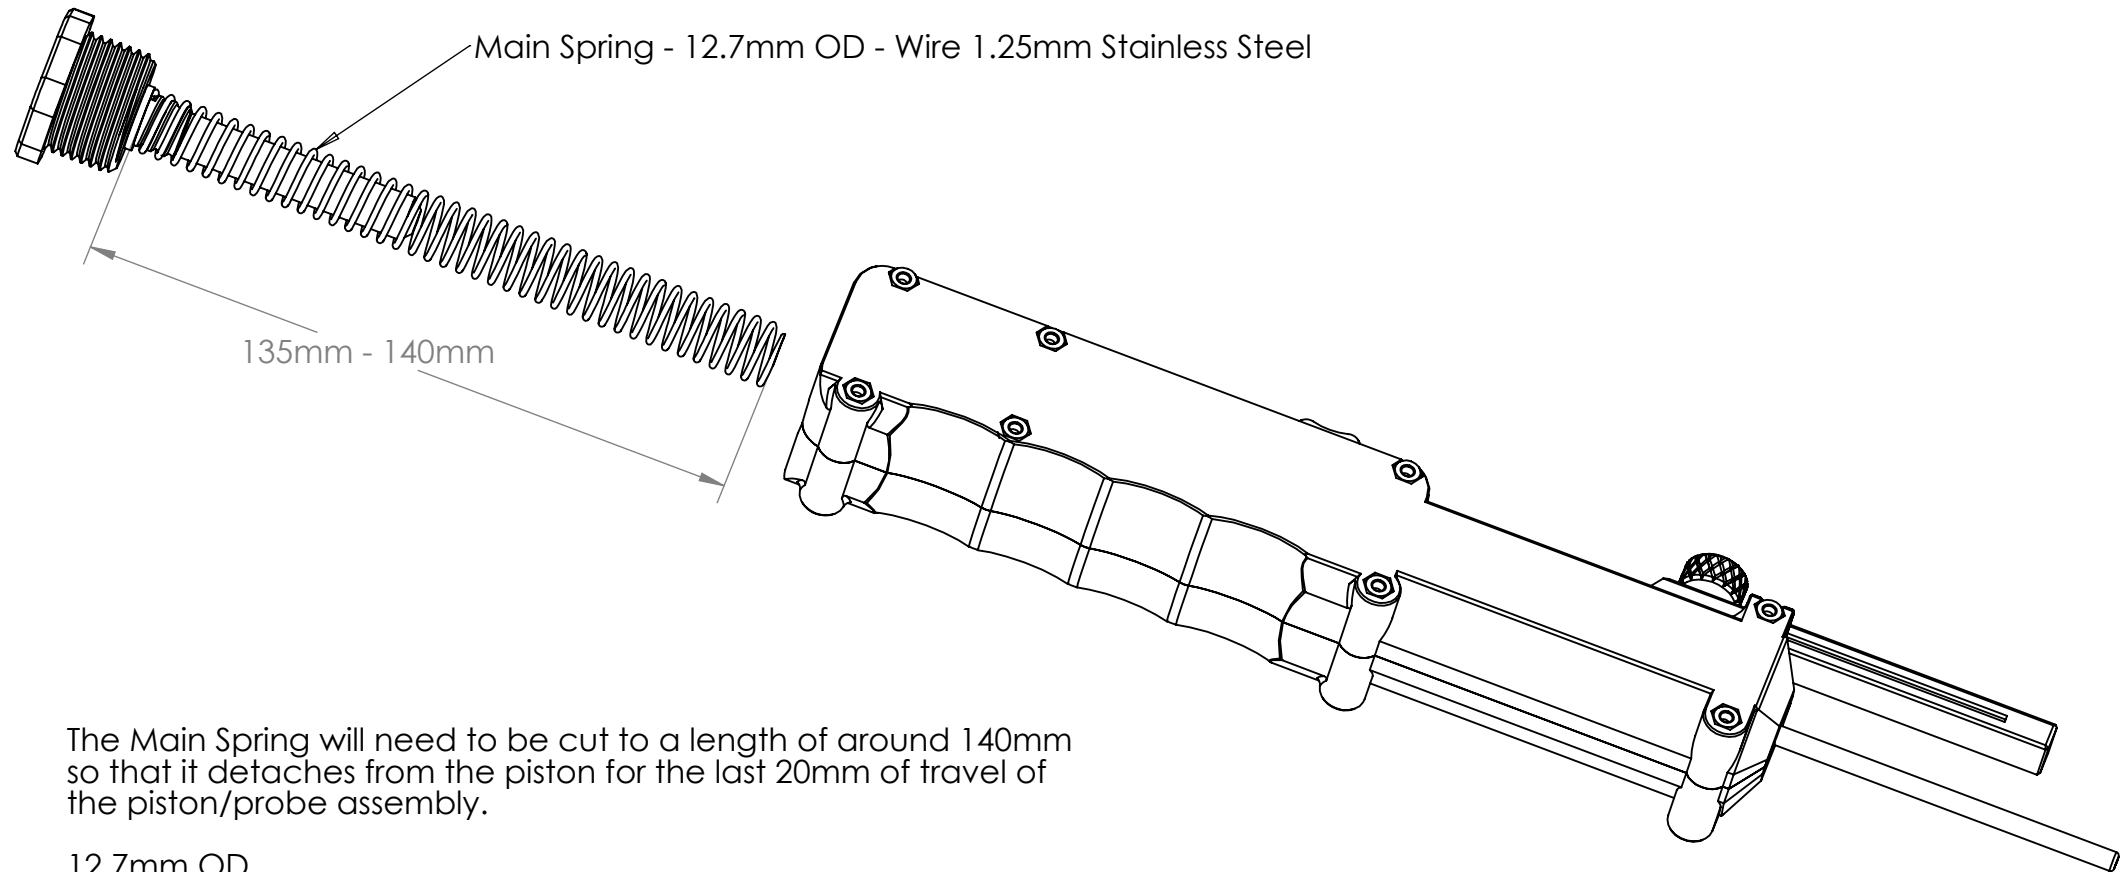

The Main Spring will need to be cut to a length of around 140mm so that it detaches from the piston for the last 20mm of travel of the piston/probe assembly.

12.7mm OD
1.25mm Wire diameter
Stainless steel

Rated at 4Nm per cm of compression