
Band Clamp

with Swivel Bolt at both ends



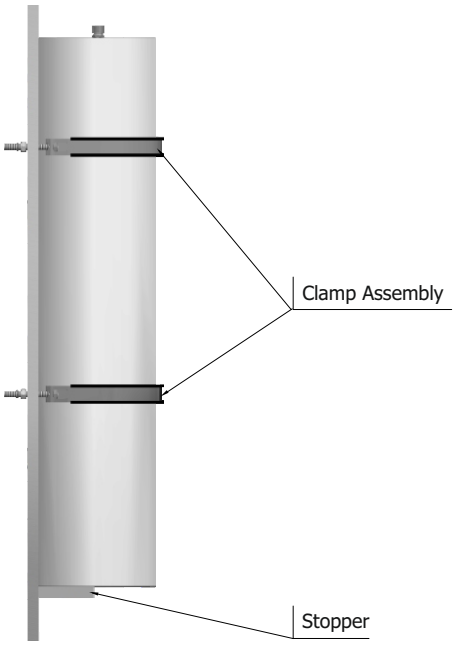

Technical Data

Material of Construction - standard

Clamp Band	: Stainless Steel, ferritic
Fasteners	: CS - Gr 8.8 (Gr.8 for nut)
Rubber Lining	: EPDM
O-Ring	: Nitrile

Others on request.

Description / Application

The mounting accessories (Brackets & Clamps) are very critical components in a hydraulic system and ensure that the Accumulators are properly and rigidly clamped on the system.

The band type static-use clamps with swivel bolts at both ends offer unrestricted positioning and flexibility due to individual shaping of the clamps.

The swivel bolts ensure simple & quick installation and the flexible band enables position correcting.

Clamping should not cause the shell or the accumulator connection to be stressed due to over tightening. It is necessary, especially with larger capacities / lengths, horizontal mounting or with heavy units, to use fastners (clamps, brackets etc) that support the accumulator and prevent dangerous vibrations.

To achieve a high degree of efficiency, the accumulator should be fitted as close as possible to the installation it serves.

The space necessary for charging & gauging kit is atleast 150mm above the gas fill valve.

Installation Position

It is suggested that the accumulators are installed vertically with gas side on top. The manufacturer's name plate stating the initial pressure must be visible. Moreover access to the vent screw must be kept unobstructed.

The mounting must be such that, should a rupture occur on the pipe system at the liquid connection, or should the gas fill valve break, the accumulator cannot be pulled from its mounting by the forces involved.

No welding or other mechanical process must be carried out on the accumulator shell for the purpose of attaching fasteners.

Technical specifications subject to change.


Ordering Code


1	2	3	4	5	6	7
CB2	**198/221**	**X**	**E**	**M10**	**90**	**Zn**

1	**Type**	Band Clamp - Swivel Bolt at both ends	**= CB2**
2	**Diameter**	Diameter Range in mm	**=** {from}**/**{to}
3	**MOC of Clamp**	Stainless Steel	**= X** (standard)
4	**MOC of Lining**	EPDM	**= E** (standard)
5	**Bolt Thread**	M10 x 1.5	**= M10** (standard) Others on request
6	**Bolt Length**	90mm 45mm	**= 90** (standard) **= 45** Others on request
7	**Bolt Plating**	Zinc Plating	**= Zn** (standard) Others on request

* Before ordering, check for availability.

Dimensions

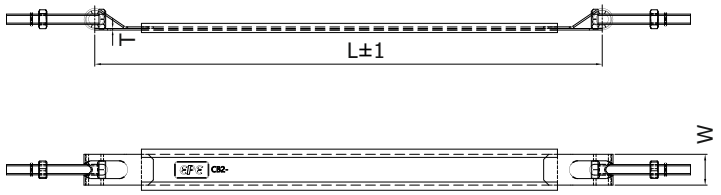

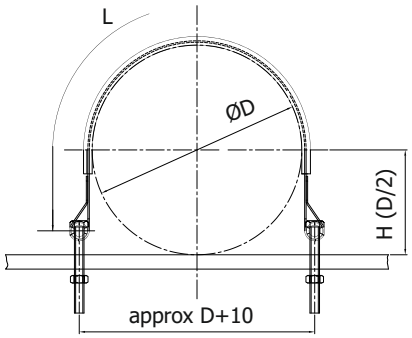


Note : Tightening torque : 20^{+2} Nm (max)

Type	ØD	H	L	W	T	Weight kg[1)]
CB2-89/106	89-106	45-53	232	30	1.5	0.33
CB2-117/127	117-127	59-64	287	30	1.5	0.36
CB2-128/138	128-138	64-69	315	30	1.5	0.37
CB2-139/150	139-150	70-75	342	30	1.5	0.39
CB2-150/168	150-168	75-84	370	30	1.5	0.40
CB2-161/183	161-183	81-92	398	30	1.5	0.42
CB2-172/194	172-194	86-97	426	30	1.5	0.43
CB2-183/205	183-205	92-103	454	30	1.5	0.45
CB2-198/221	198-221	99-111	494	30	1.5	0.47
CB2-213/236	213-236	107-118	534	30	1.5	0.49
CB2-229/252	229-252	115-126	575	30	1.5	0.51
CB2-245/268	245-268	123-134	615	30	1.5	0.53
CB2-261/284	261-284	131-142	656	30	1.5	0.56

[1)] = Weight including bolts & nuts

Dimensions in mm

Allied Products

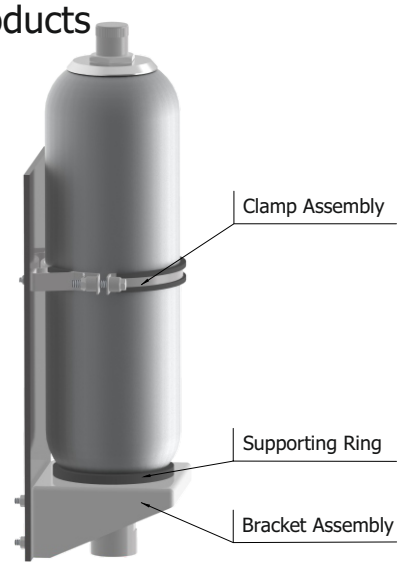

EPE Process Filters & Accumulators Pvt. Ltd., Techni Towers, C-54/A, APIE, Balanagar, Hyderabad - 500 037, Telangana, INDIA
Ph : +91 40 23778803 | Fax : +91 40 23871447 | business@epe-india.com | www.epe-india.com