
Mounting Accessories

Clamp | Bracket

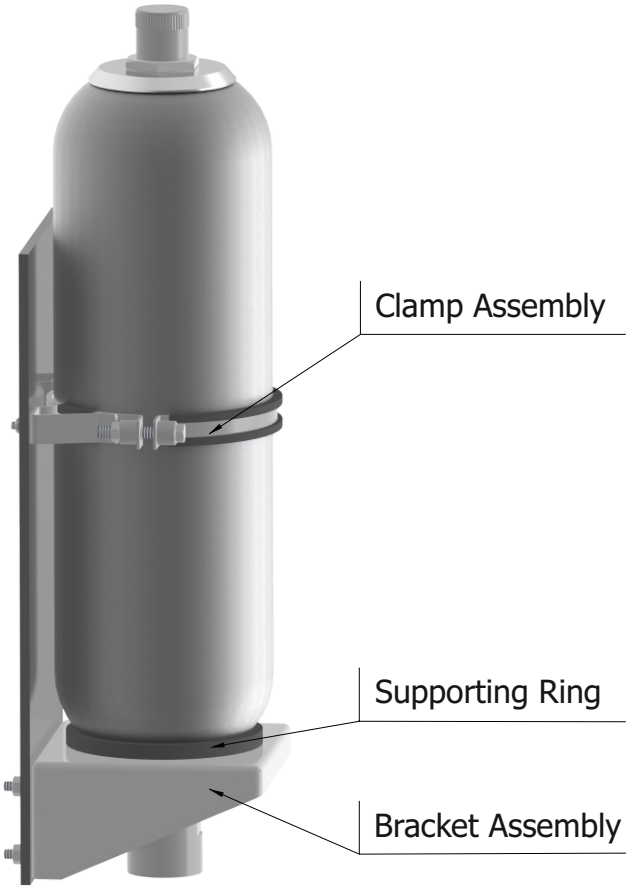

Technical Data

Material of Construction - standard

Clamp Assy.	: Galvanised CS + EPDM
Bracket Assy.	: Galvanised CS + Nitrile
Support Ring	: Nitrile
Fasteners	: CS - Gr 8.8 (Gr.8 for nut)

Others on request.

Description / Application

The mounting accessories (Brackets & Clamps) are very critical components in a hydraulic system and ensure that the Accumulators are properly and rigidly clamped on the system.

Clamping should not cause the shell or the accumulator connection to be stressed due to over tightening. It is necessary, especially with larger capacities / lengths, horizontal mounting or with heavy units, to use fastners (clamps, brackets etc) that support the accumulator and prevent dangerous vibrations.

To achieve a high degree of efficiency, the accumulator should be fitted as close as possible to the installation it serves.

The space necessary for charging & gauging kit is atleast 150mm above the gas fill valve.

Installation Position

It is suggested that the accumulators are installed vertically with gas side on top. The manufacturer's name plate stating the initial pressure must be visible. Moreover access to the vent screw must be kept unobstructed.

The mounting must be such that, should a rupture occur on the pipe system at the liquid connection, or should the gas fill valve break, the accumulator cannot be pulled from its mounting by the forces involved.

No welding or other mechanical process must be carried out on the accumulator shell for the purpose of attaching fasteners.

Technical specifications subject to change.

Clamp Assemblies

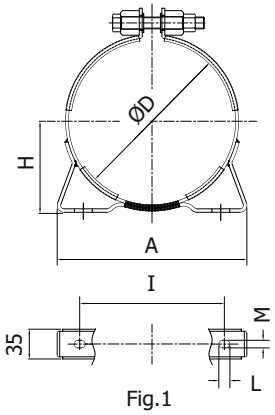


Fig.1

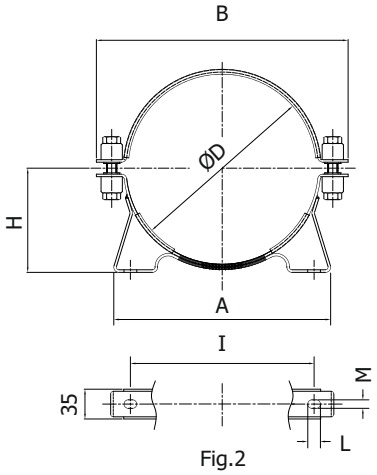


Fig.2

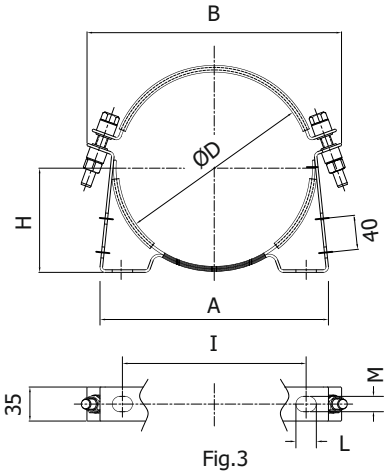


Fig.3

Part #	Fig.	Weight kg[1)]	A	B	ØD	H	I	L	M	Accumulator type			
										AS/ASHF	ASWP	AMW	AP
CL0100	1	0.65	125	-	89 - 93	52 - 55	90	13	9	0.7	-	-	80 Dia
CL0201	1	0.75	138	-	110 - 114	64 - 66	100	13	9	1-3	-	0.75	-
CL0202	2	0.85	135	194	120 - 125	70 - 73	100	13	9	1-3	-	0.75	100 Dia
CL0204	1	0.85	135	-	114 - 120	75.5	100	13	9	1-3	-	0.75	-
CT0702	2	1.00	180	201	130 - 136	77 - 80	121	20	10	-	-	1	-
CT0700	2	1.15	172	220	148 - 150	83 - 85	141	13	9	-	-	1.4-2	125 Dia
CL0300	1	0.95	190	-	160 - 168	81 - 95	148	13	9	4-6	4-6	2.8	-
CL0301	2	1.10	185	240	163 - 174	91 - 100	146	13	9	4-6	4-6	2.8-5	-
CL0302	2	0.85	193	260	185 - 190	110	146	13	9	-	4-6	-	-
CT0400	2	1.35	255	296	219 - 226	125 - 125	216	20	10	10-57	10-57	-	180 Dia
CT0404	3	1.47	270	308	220 - 226	123 - 125	216	20	10	10-57	10-57	-	-
CT0499	2	1.60	268	316	235 - 241	130 - 133	216	20	10	-	10-57-HP	-	-
CT0408	2	1.80	320	335	254 - 260	139 - 142	240	25	12	-	10-57-HP	-	-
CT0413	2	1.90	333	348	273	145.5	240	13	12	-	10-57-HP	-	-
CT0414	2	2.50	426	440	355	187	335	13	12	60-130	-	-	-

[1)] = Weight including bolts & nuts

Dimensions in mm

Bracket Assembly

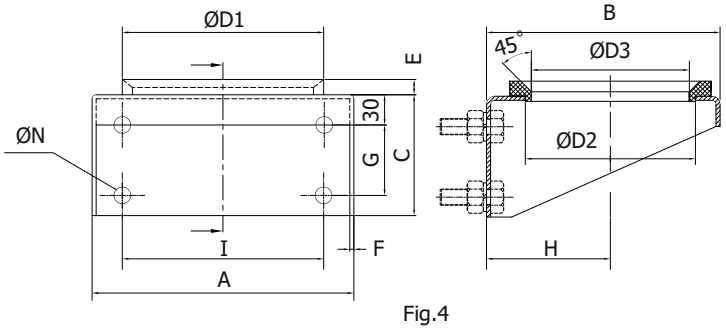


Fig.4

Supporting Ring




Fig.5

Part #	Fig.	Weight kg[1)]	A	B	C	ØD1	ØD2	ØD3	ØD4	E	F	G	H	I	ØN	Accumulator type	
																AS types	AMW
BA0300	4	1.80	200	175	90	140	119	107	-	10	3	40	93	140	11	4-6	0.75-2
BA0400	4	3.60	260	232	120	200	169	157	-	15	4	70	123	200	17	10-57	2.8-5
BA0402	4	3.87	260	252	120	200	169	157	-	15	4	70	142	200	17	60-130	-
BC0300	5	0.13	-	-	-	140	119	107	128	10	-	-	-	-	-	4-6	0.75-2
BC0400	5	0.22	-	-	-	200	169	157	178	15	-	-	-	-	-	10-130	2.8-5

[1)] = Weight including bolts & nuts

Dimensions in mm

EPE Process Filters & Accumulators Pvt. Ltd., Techni Towers, C-54/A, APIE, Balanagar, Hyderabad - 500 037, Telangana, INDIA
Ph : +91 40 23778803 | Fax : +91 40 23871447 | business@epe-india.com | www.epe-india.com