

# RA8P1 E-READER

Processor schematic development  
Power networks are being implemented from RA8P1-specific references.  
This revision is not a completed schematic or a fabrication release.

RA8P1 IO allocation



File: mcu\_interfaces.kicad\_sch

Global supplies: +3V3\_MCU and GND.  
Core regulator output MCU\_VCORE stays local to the processor power sheet.  
  
Remaining subsystem circuits follow epic #821 and issues #824-#834:  
radio, memory/storage, USB/battery, system rails, display controller,  
panel power, touch, warm/cool lighting, buttons and sensors.  
No empty subsystem sheets are represented as completed circuits.  
  
Footprint and PCB qualification are deferred by scope.

RA8P1 internal core regulator



File: mcu\_core\_power.kicad\_sch

RA8P1 IO and analog supplies



File: mcu\_supply\_power.kicad\_sch


RA8P1 clocks, reset and debug




File: mcu\_clocks\_debug.kicad\_sch

|                                          |                  |                |
|------------------------------------------|------------------|----------------|
| Sheet: /<br>File: ereader_rev1.kicad_sch |                  |                |
| Title: RA8P1 e-reader - schematic index  |                  |                |
| Size: A3                                 | Date: 2026-09-05 | Rev: 0.3 DRAFT |
| KiCad E.D.A. 10.0.5                      | Id: 1/5          |                |

DRAFT: Existing processor units retained. Signal allocation and clocks/debug wiring are not yet complete.

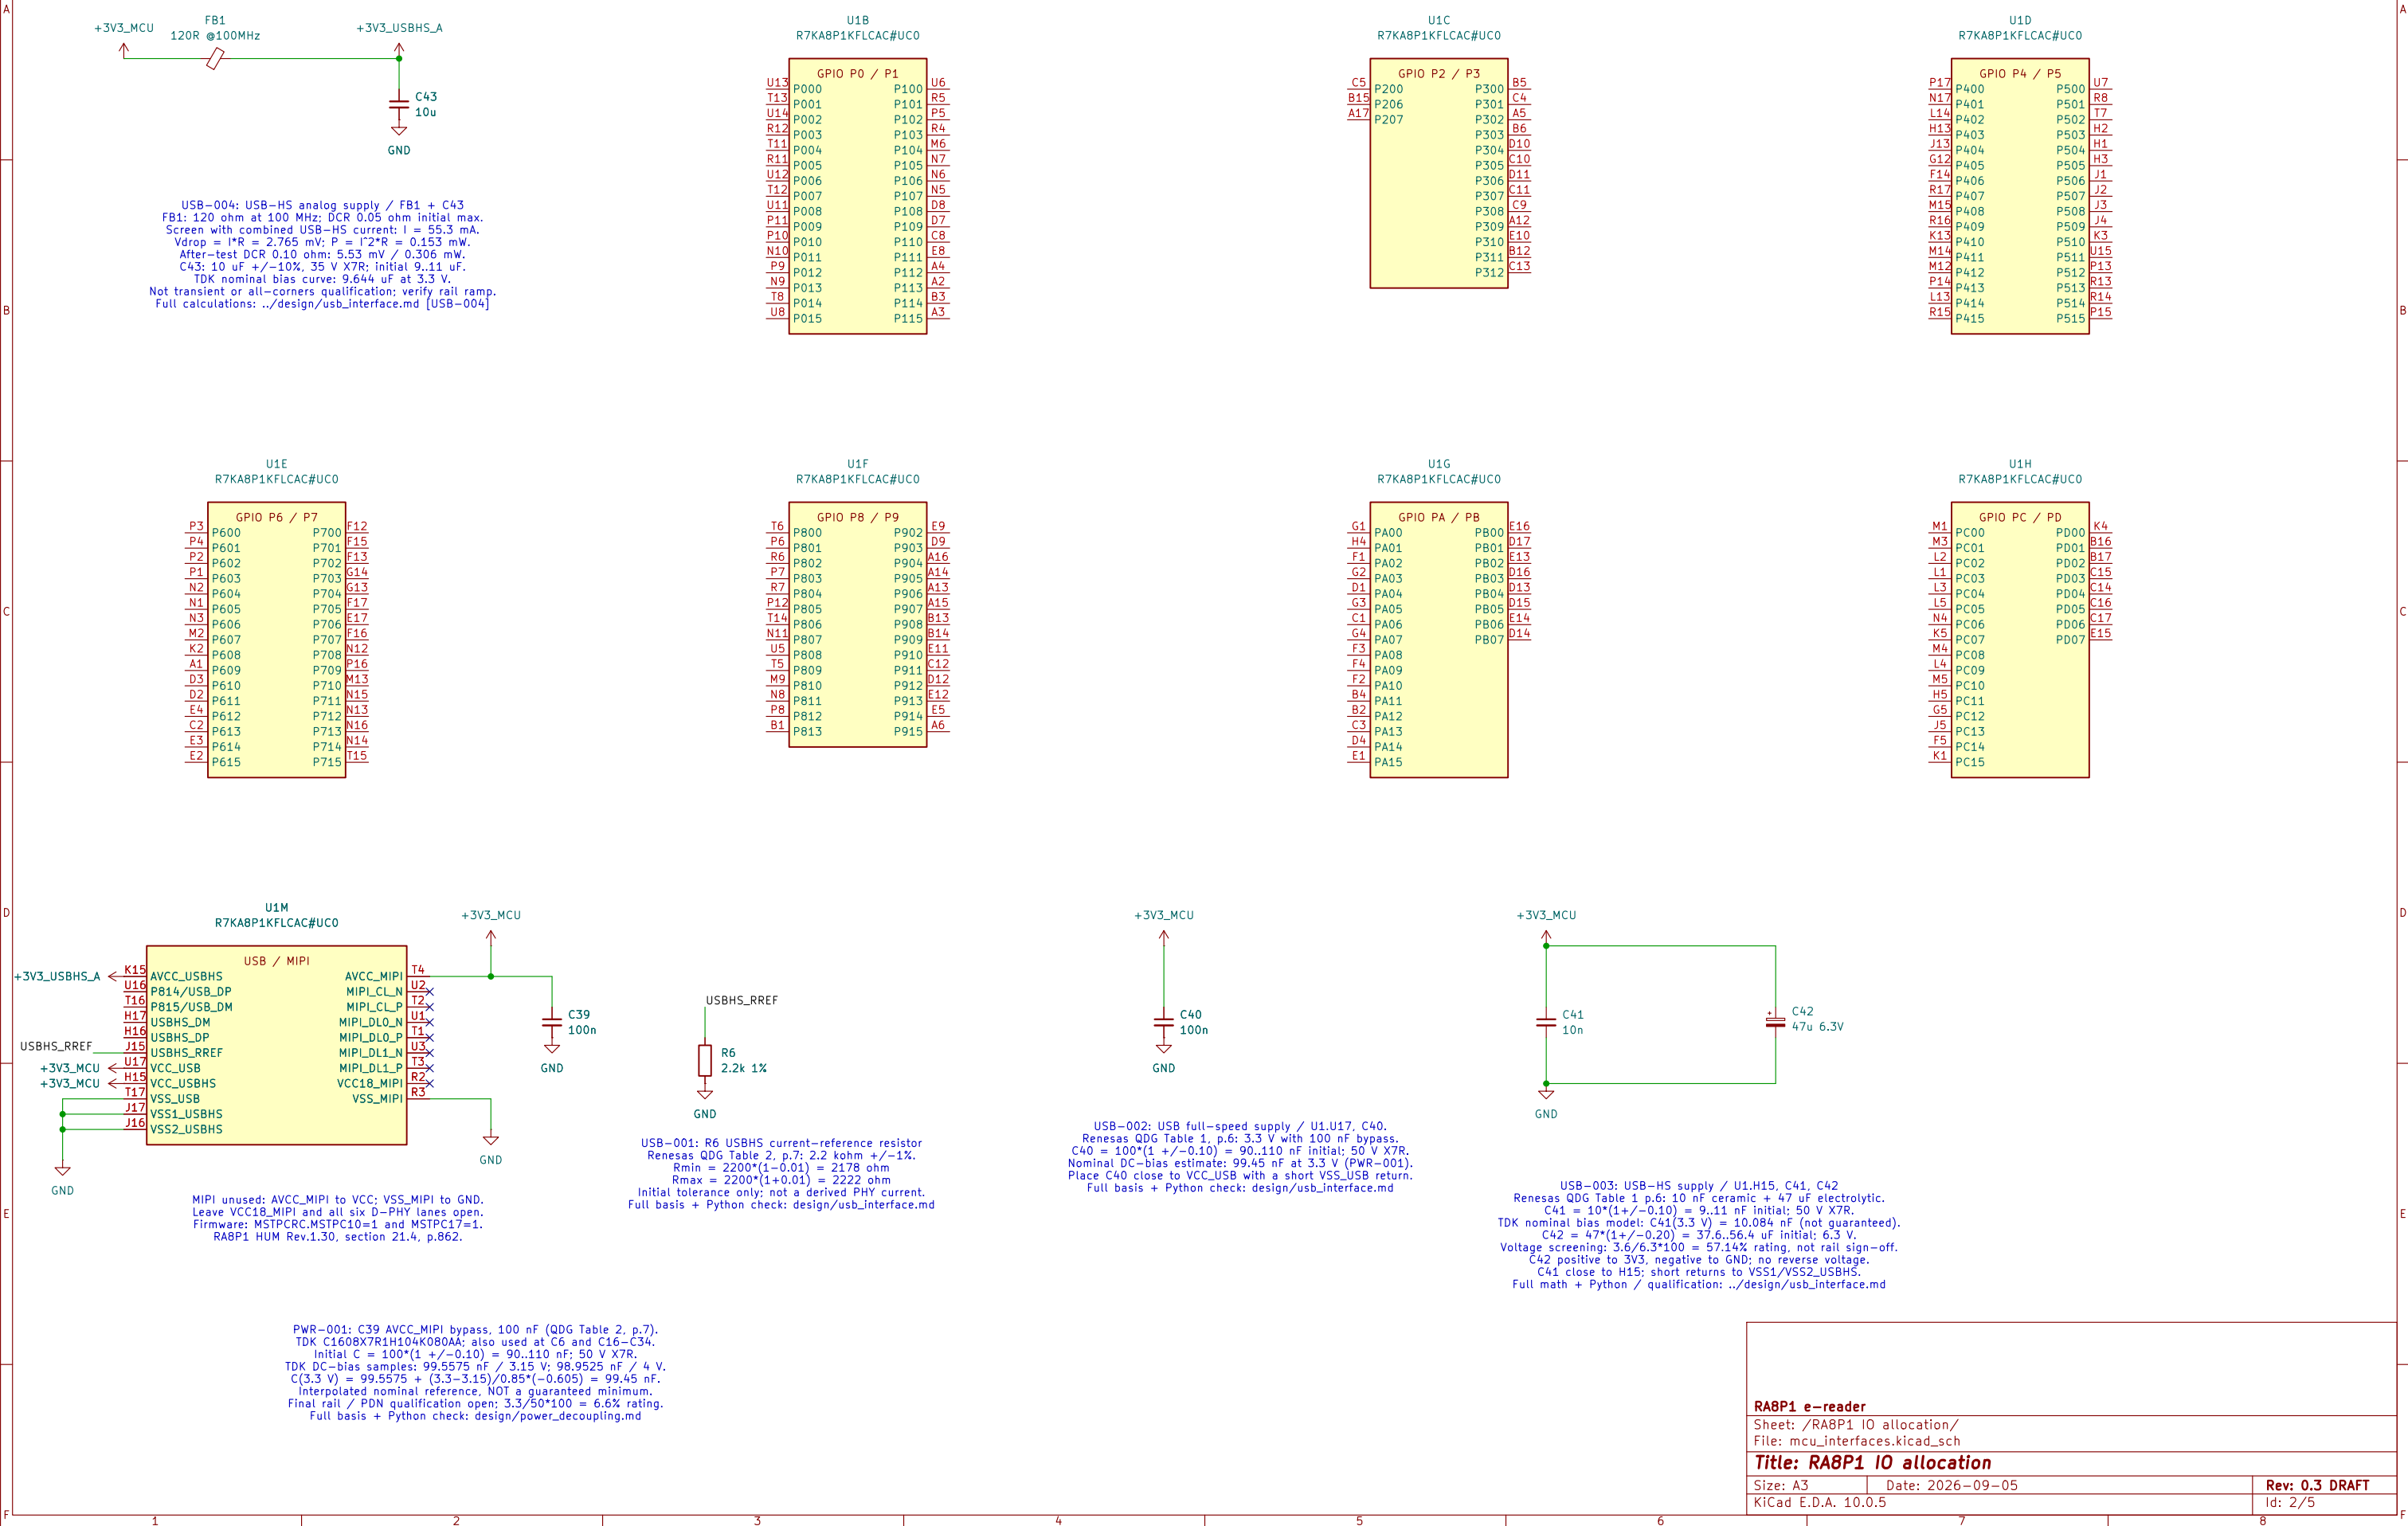



L1 DCR <= 100mOhm. Effective capacitance and inductor current rating require final MPN qualification. The 3.3 V source and return will be declared on the system-power sheet; no blanket ERC flags.

