

RA8P1 E-READER

Development draft – not for fabrication.
Requirements: design/ereader_requirements.md
Tracking: GitHub epic #821.

RA8P1 IO allocation



File: mcu_interfaces.kicad_sch

RA8P1 internal core regulator



File: mcu_core_power.kicad_sch

RA8P1 IO and analog supplies



File: mcu_supply_power.kicad_sch

RA8P1 clocks, reset and debug



File: mcu_clocks_debug.kicad_sch

Page and volume buttons



File: user_controls.kicad_sch

ESP32-C6 radio



File: radio_esp32.kicad_sch

MCU_RESET_N

Global supplies: +3V3_MCU and GND.
Core regulator output MCU_VCORE stays local to the processor power sheet.

Remaining subsystem circuits follow epic #821 and issues #824–#834:
radio, memory/storage, USB/battery, system rails, display controller,
panel power, touch, warm/cool lighting, buttons and sensors.
No empty subsystem sheets are represented as completed circuits.


Footprint and PCB qualification are deferred by scope.


Power button and source control





File: power_button.kicad_sch

DRAFT: Existing processor units retained. Signal allocation and clocks/debug wiring are not yet complete.

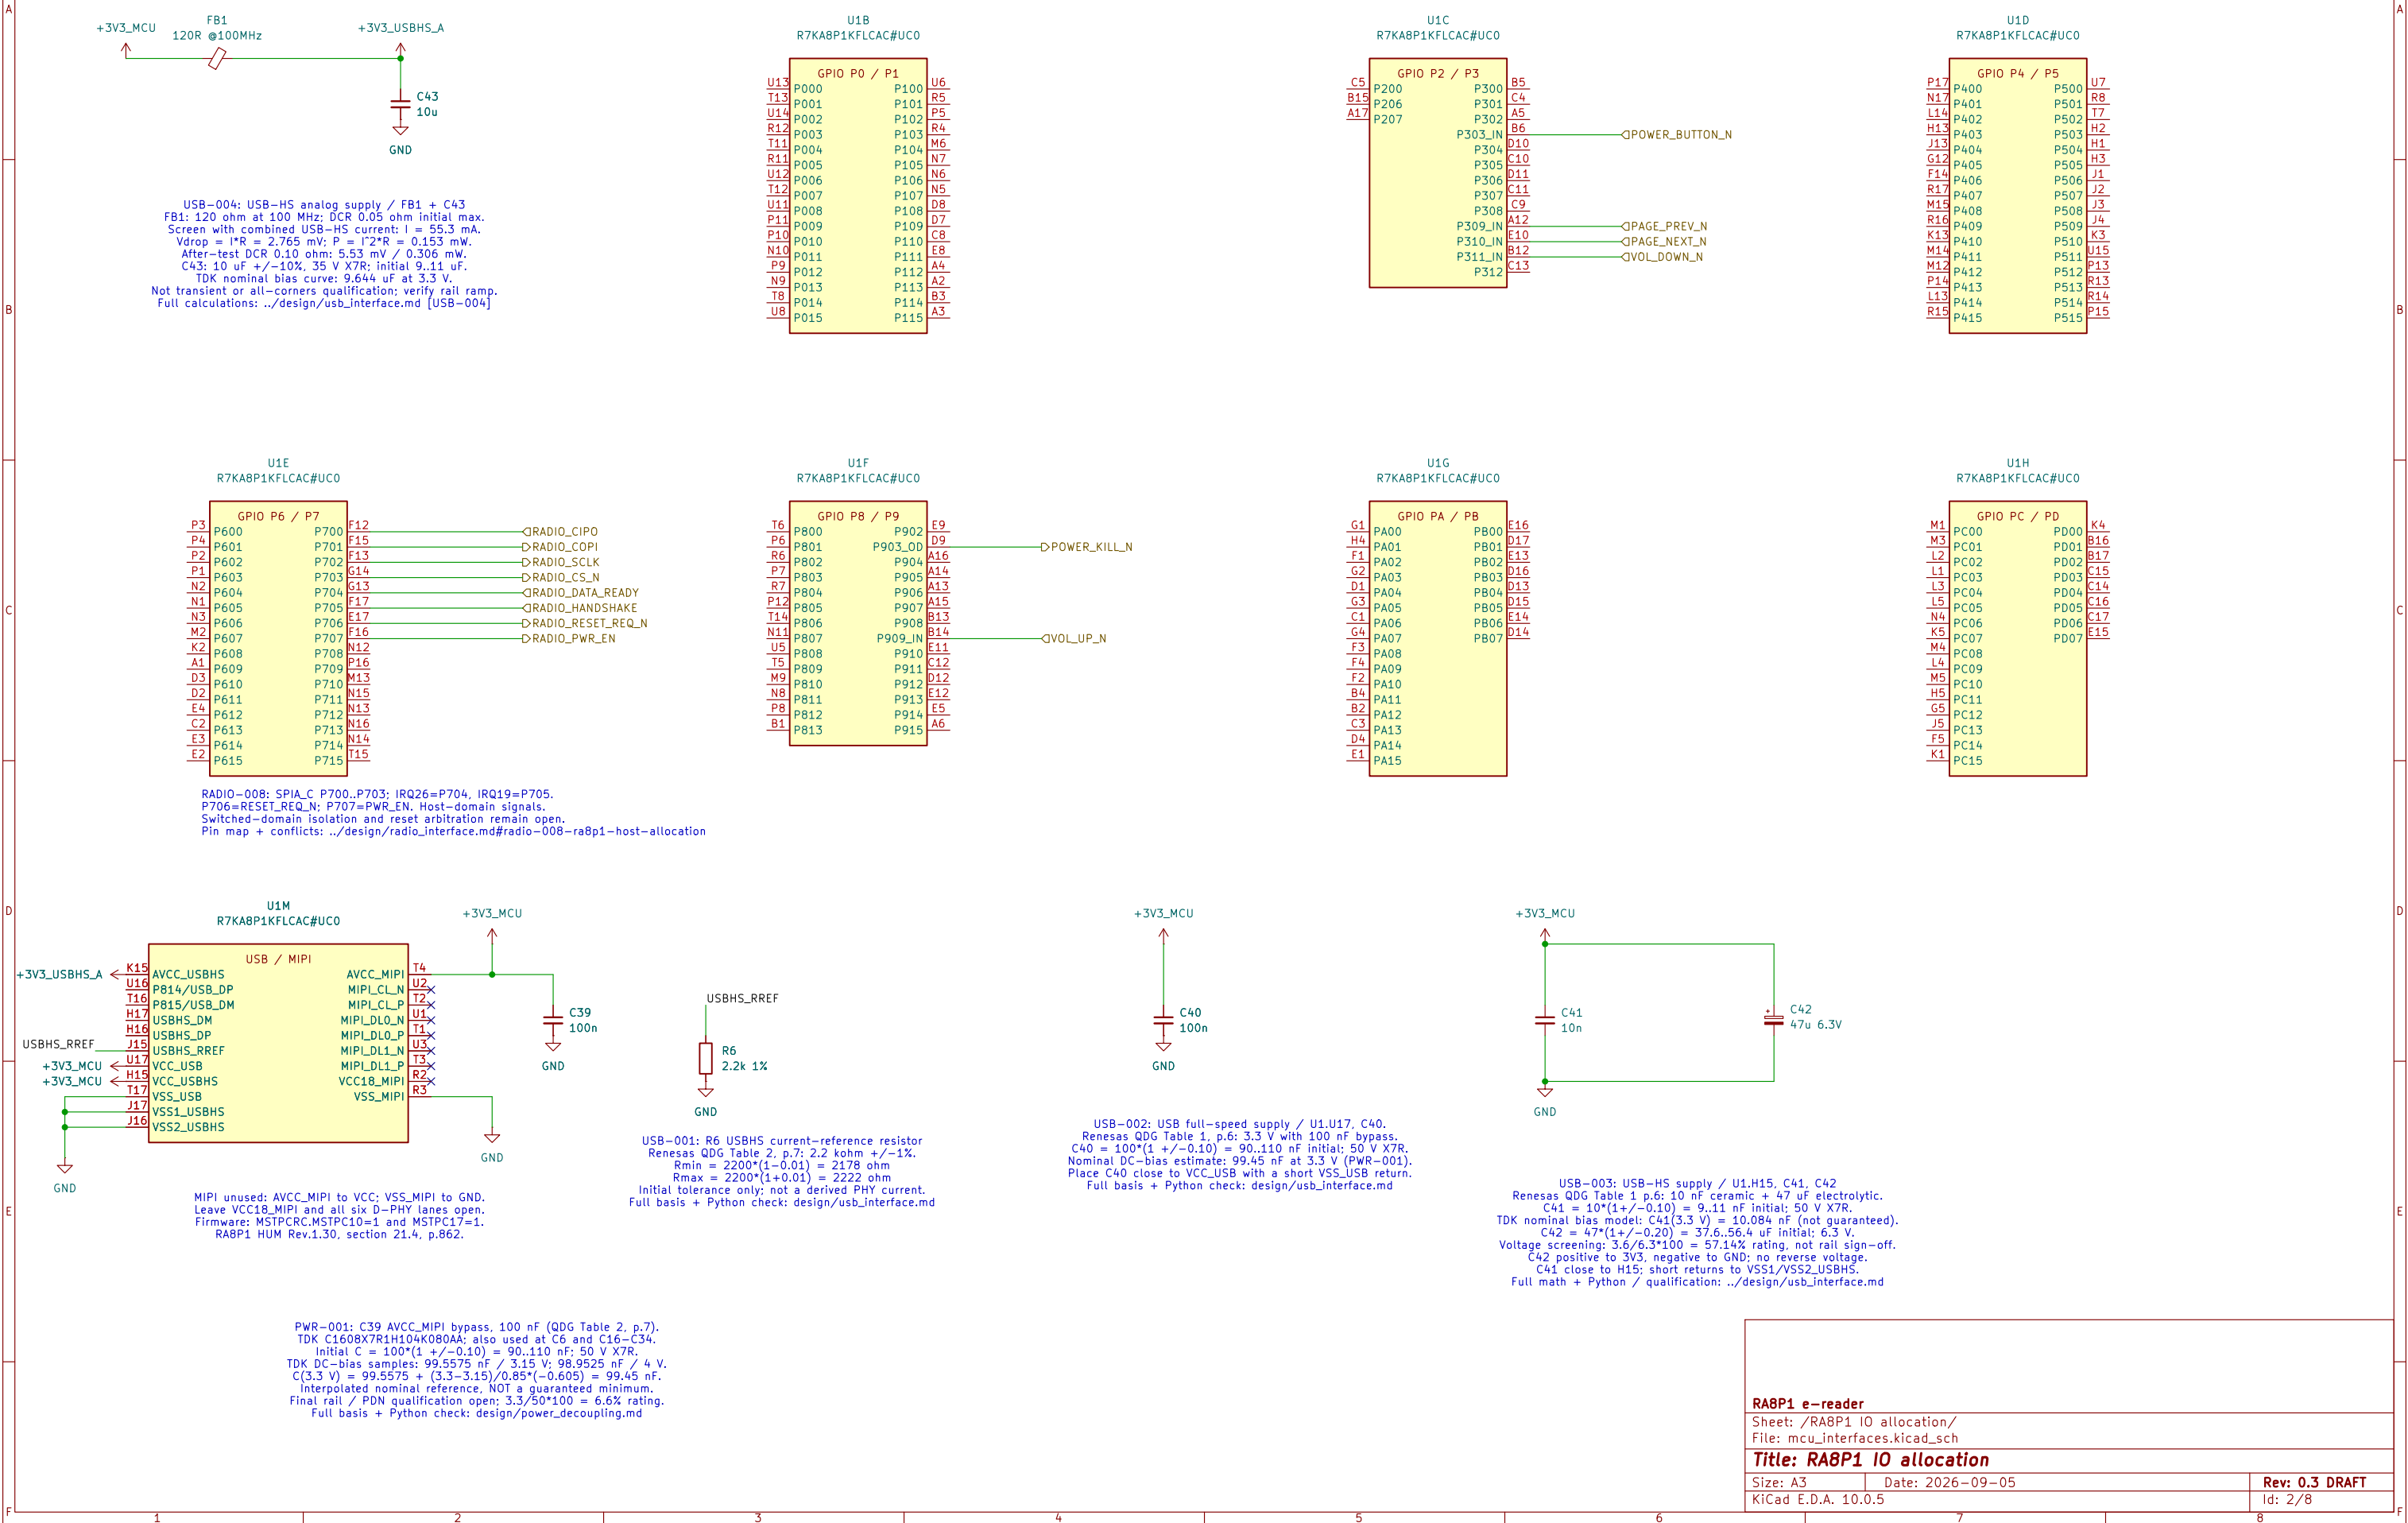

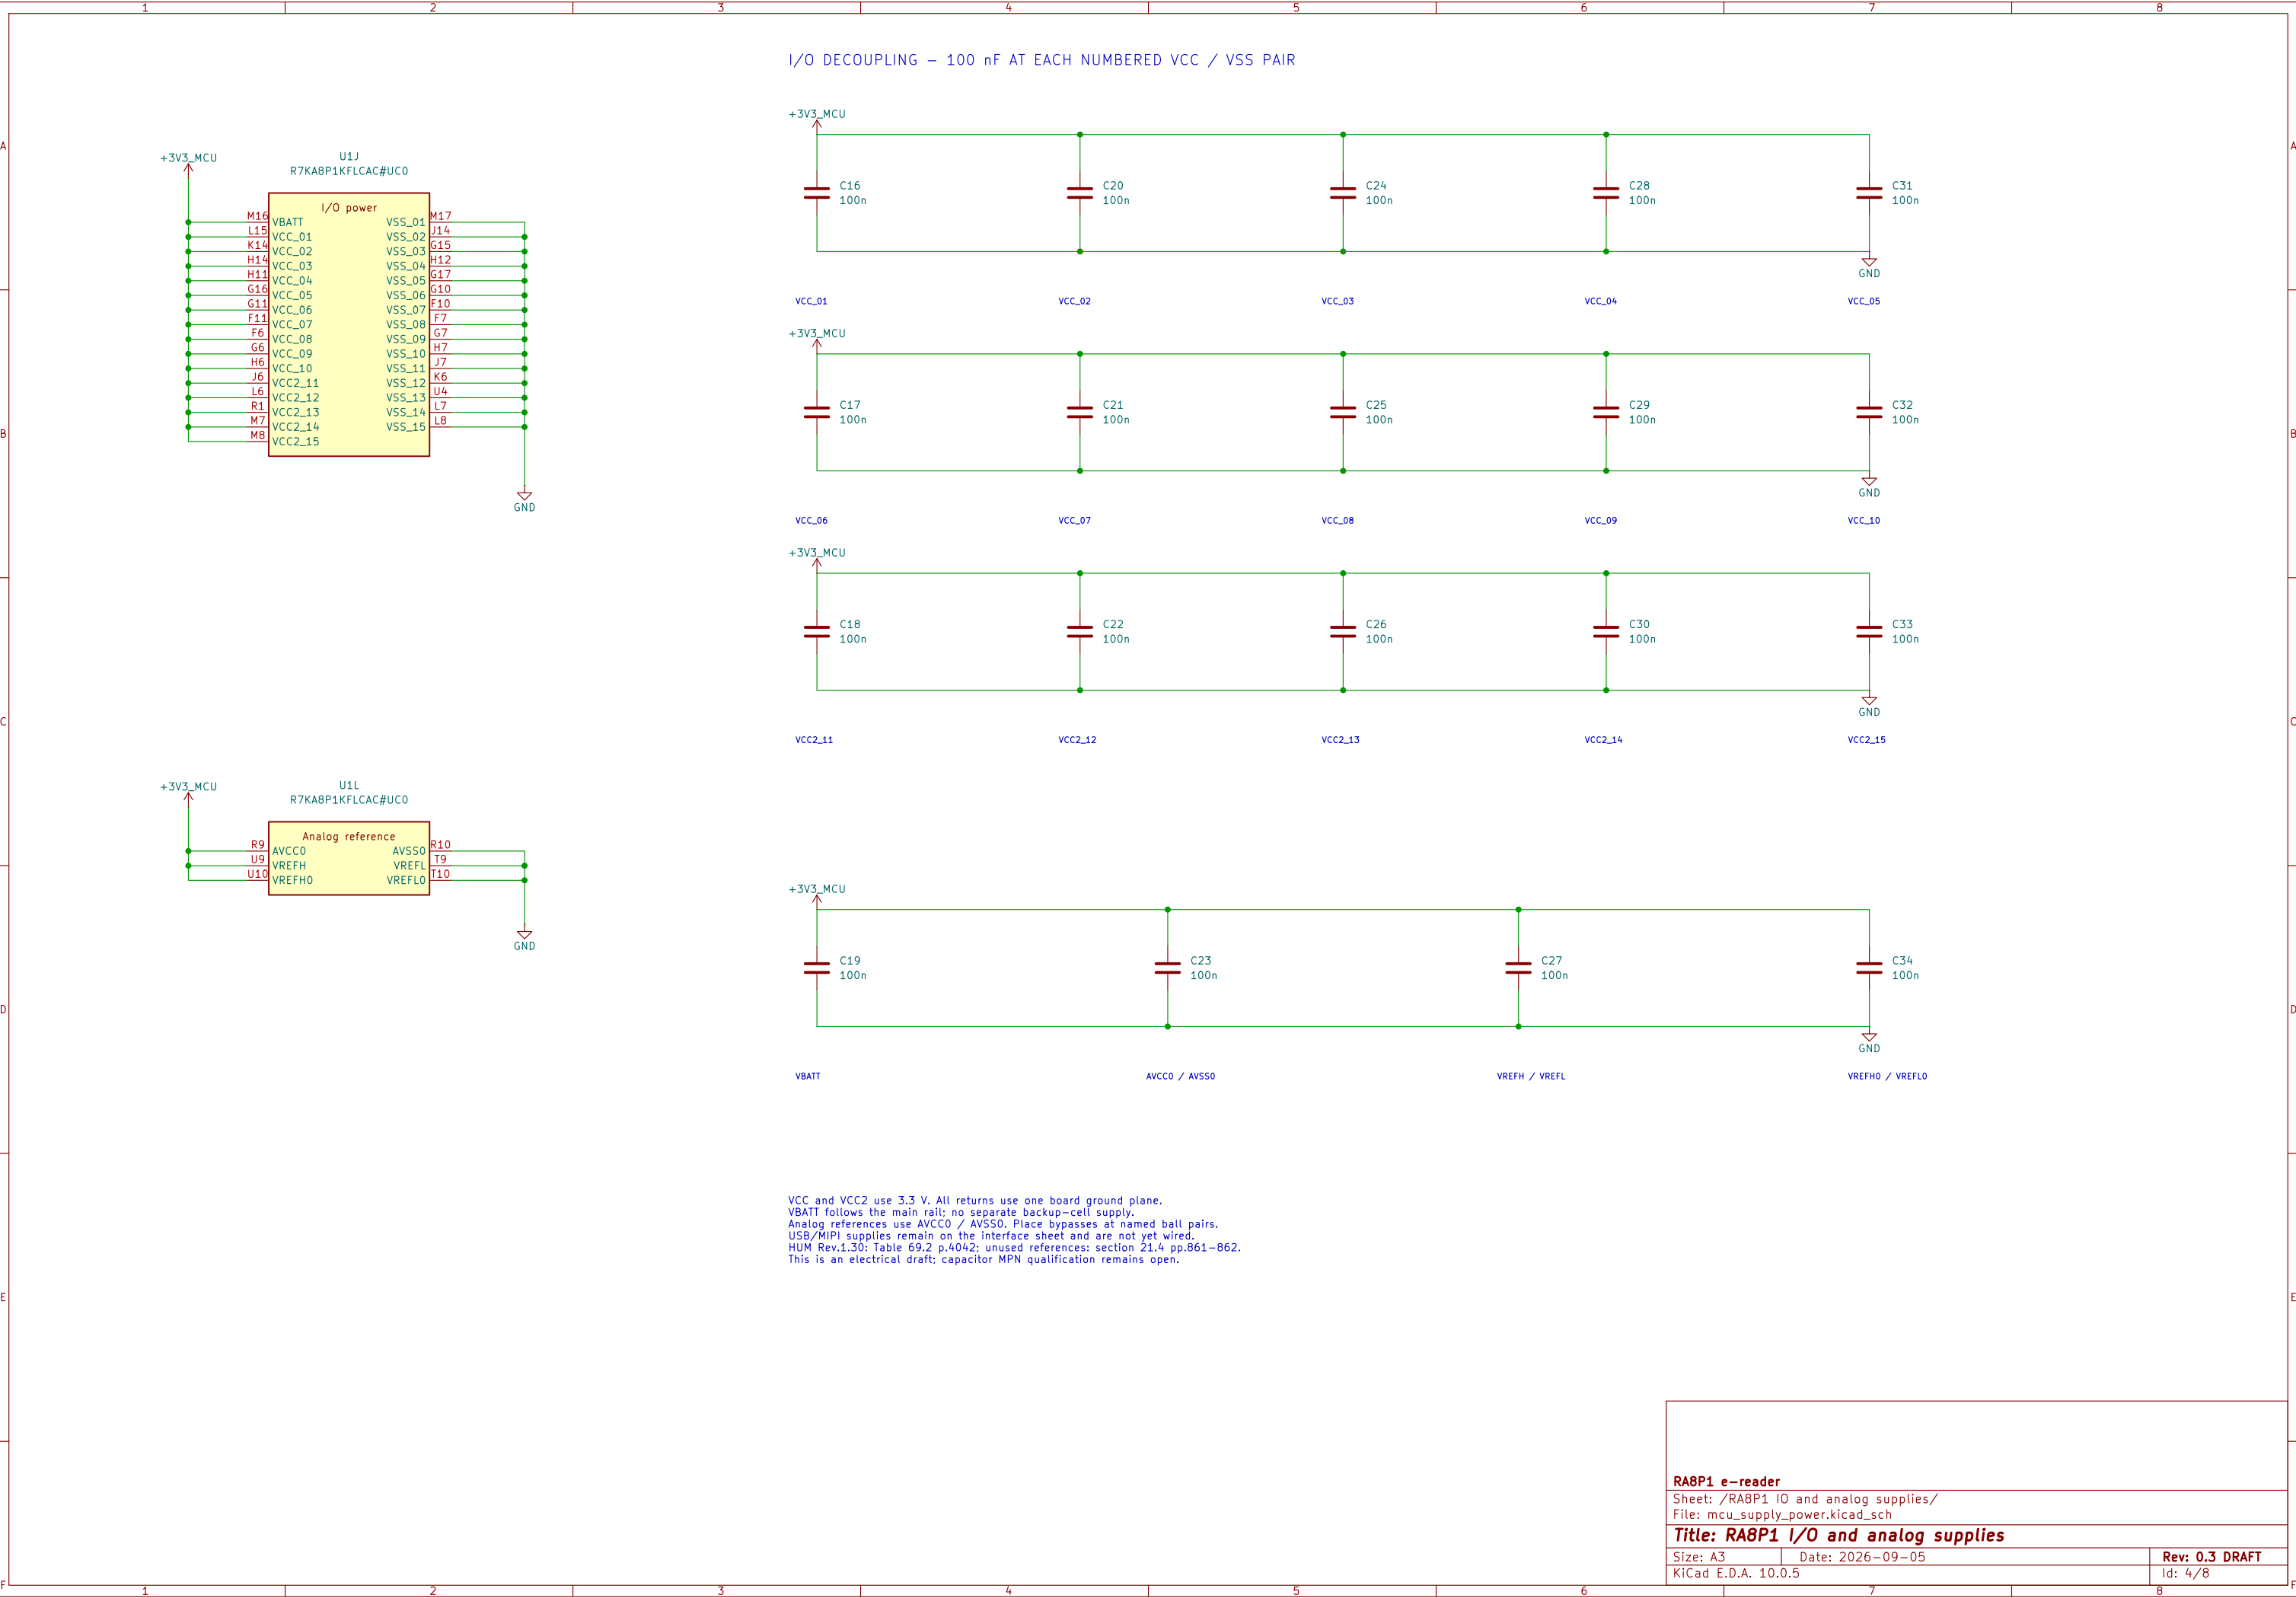

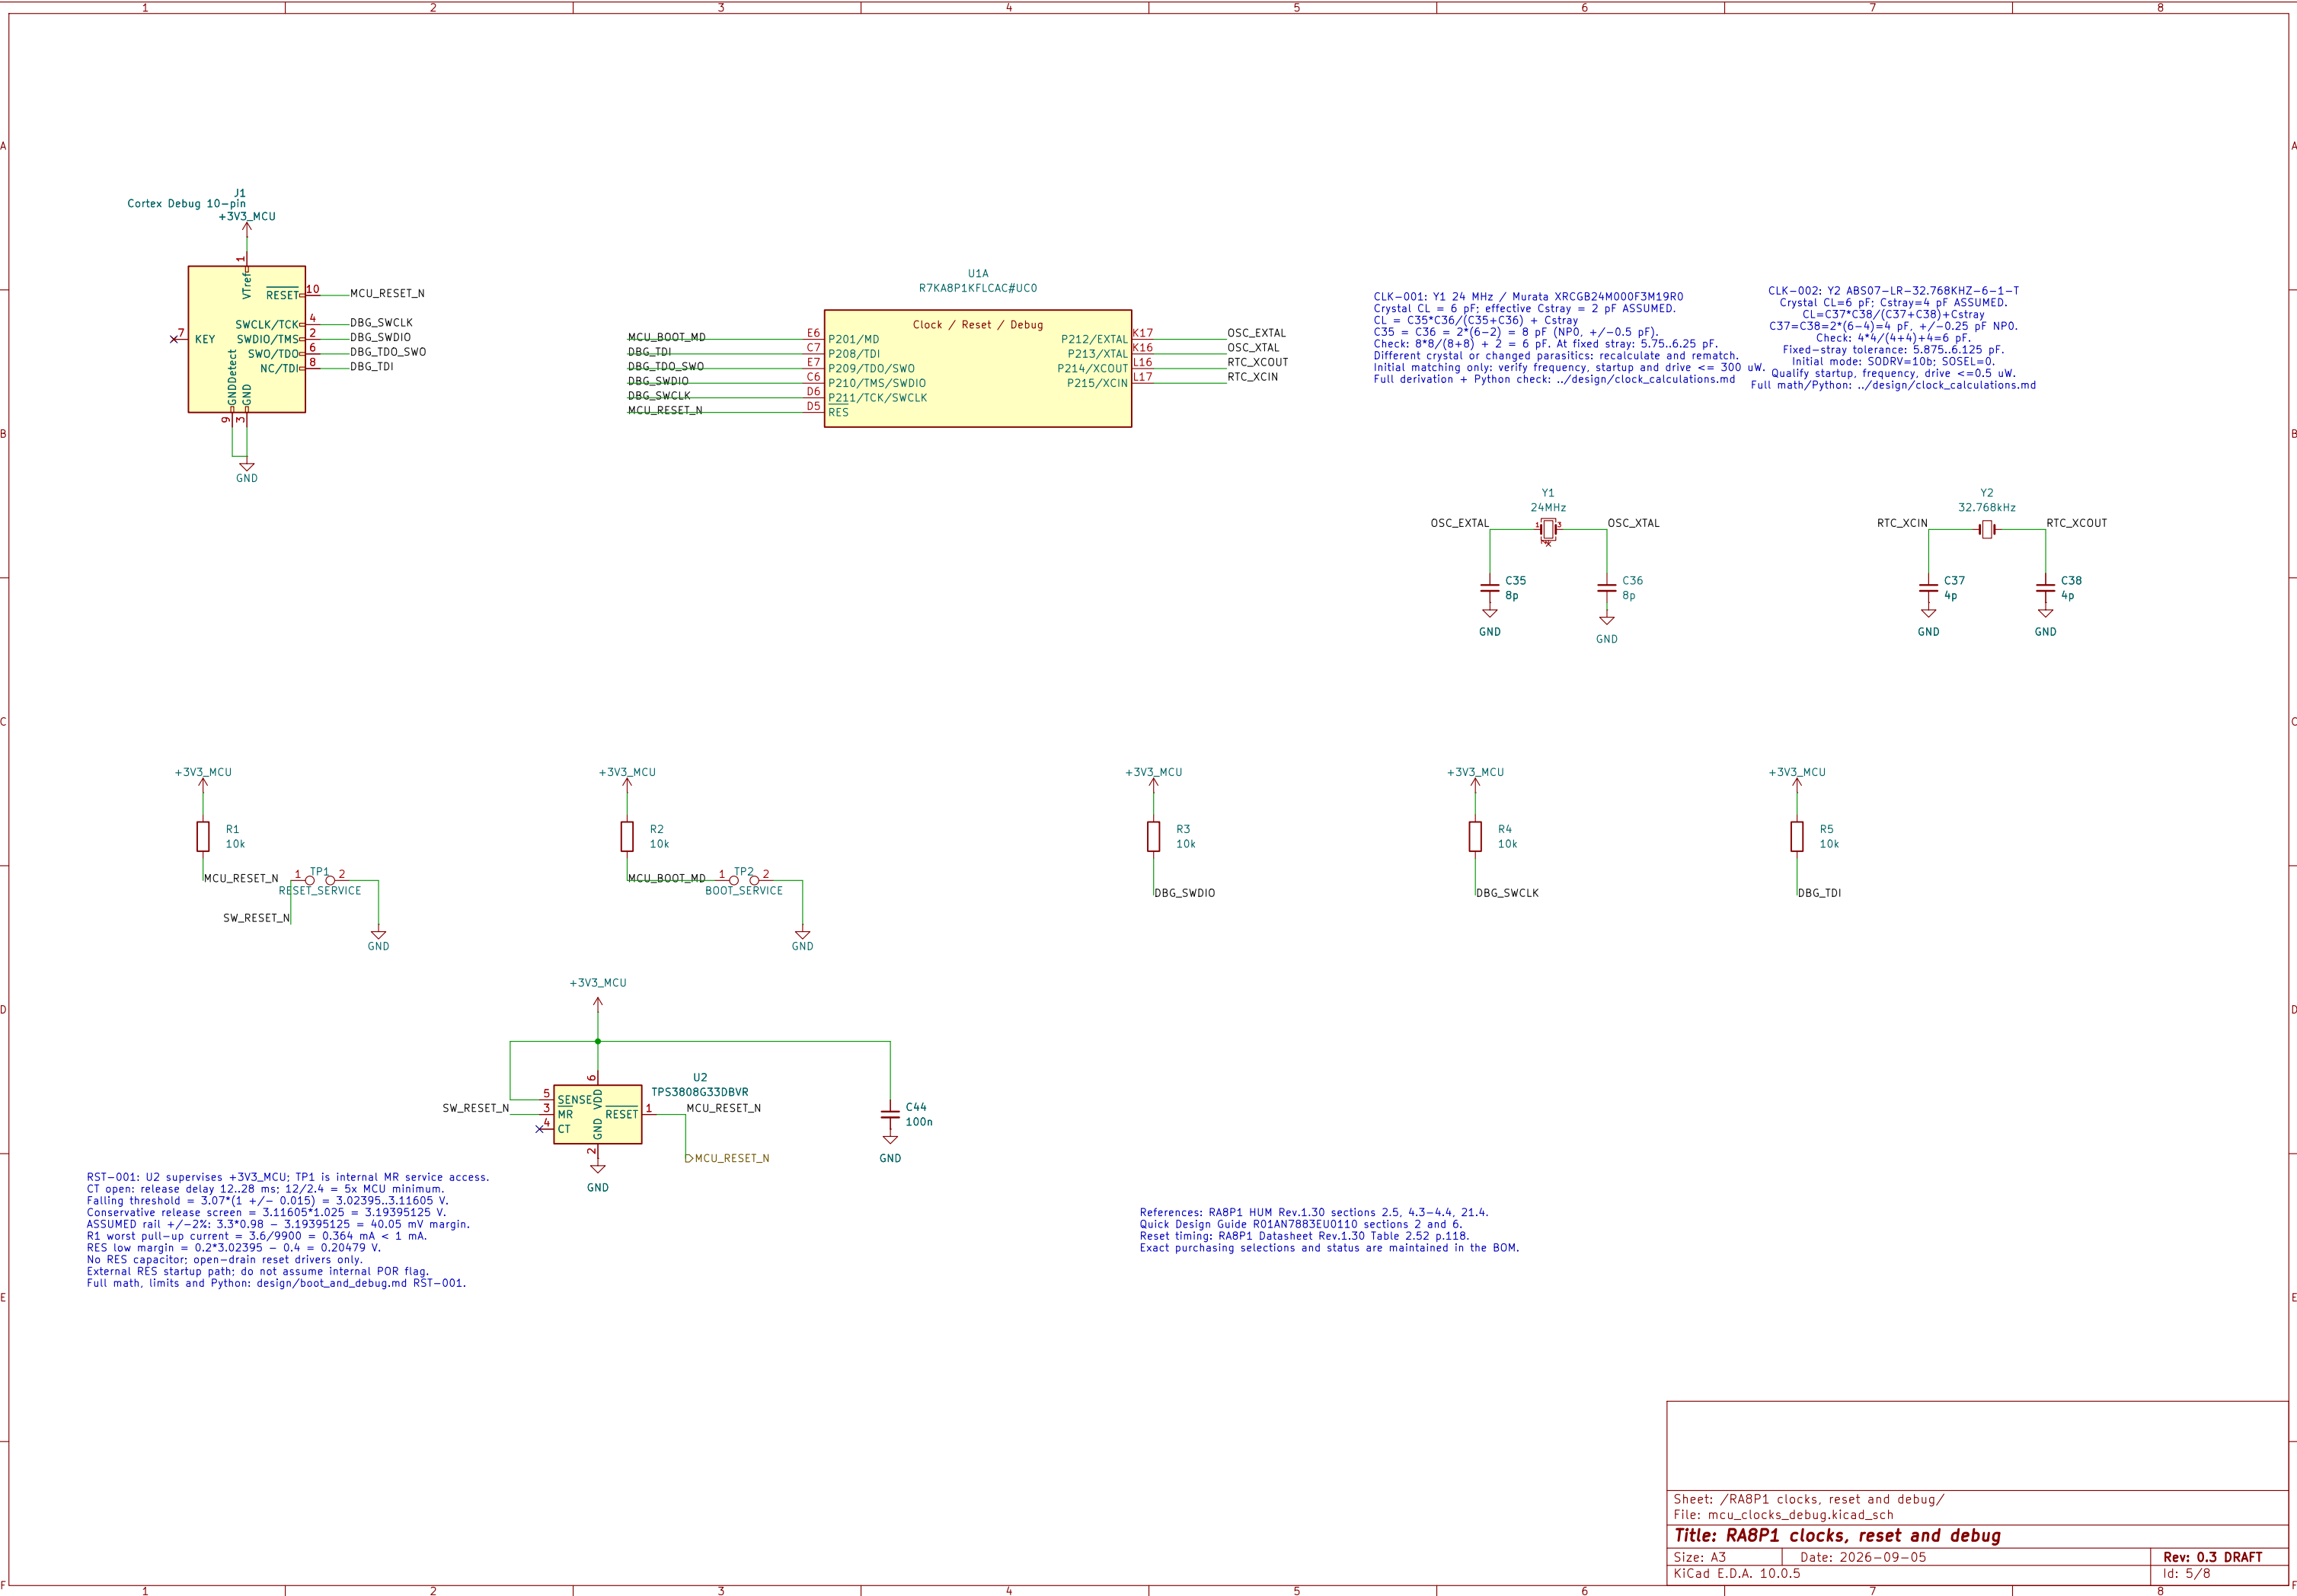

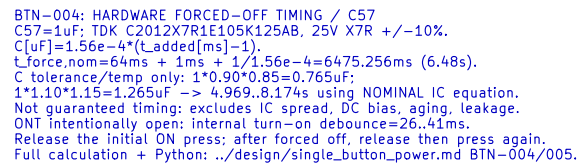

ERC supply path: U10 VOUT through R31.
PWR_FLAG declares that series-fed source only;
raw SYS_AON source remains unimplemented.

