

RA8P1 E-READER

Processor schematic development
Power networks are being implemented from RA8P1-specific references.
This revision is not a completed schematic or a fabrication release.

RA8P1 IO allocation




File: mcu_interfaces.kicad_sch

ESP32-C6 radio



File: radio_esp32.kicad_sch

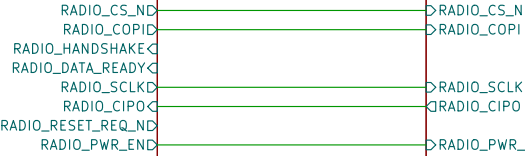

RA8P1 internal core regulator



File: mcu_core_power.kicad_sch

Global supplies: +3V3_MCU and GND.
Core regulator output MCU_VCORE stays local to the processor power sheet.

Remaining subsystem circuits follow epic #821 and issues #824-#834:
radio, memory/storage, USB/battery, system rails, display controller,
panel power, touch, warm/cool lighting, buttons and sensors.
No empty subsystem sheets are represented as completed circuits.

Footprint and PCB qualification are deferred by scope.

RA8P1 IO and analog supplies




File: mcu_supply_power.kicad_sch

RA8P1 clocks, reset and debug










File: mcu_clocks_debug.kicad_sch


DRAFT: Existing processor units retained. Signal allocation and clocks/debug wiring are not yet complete.

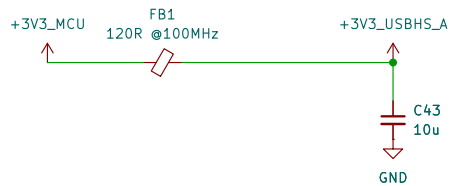


USB-004: USB-HS analog supply / FB1 + C43
FB1: 120 ohm at 100 MHz; DCR 0.05 ohm initial max.
Screen with combined USB-HS current: I = 55.3 mA.
Vdrop = I*R = 2.765 mV; P = I^2*R = 0.153 mW.
After-test DCR 0.10 ohm; 5.53 mV / 0.306 mW.
C43: 10 uF +/-10%, 35 V X7R; initial 9.11 uF.
TDK nominal bias curve: 9.644 uF at 3.3 V.
Not transient or all-corners qualification; verify rail ramp.
Full calculations: ../design/usb_interface.md [USB-004]

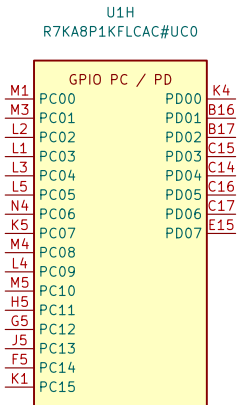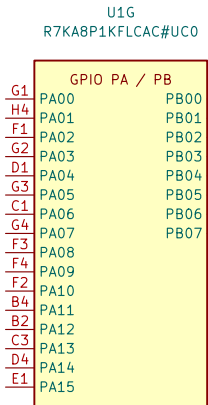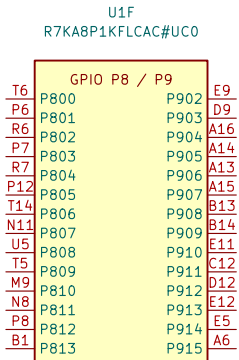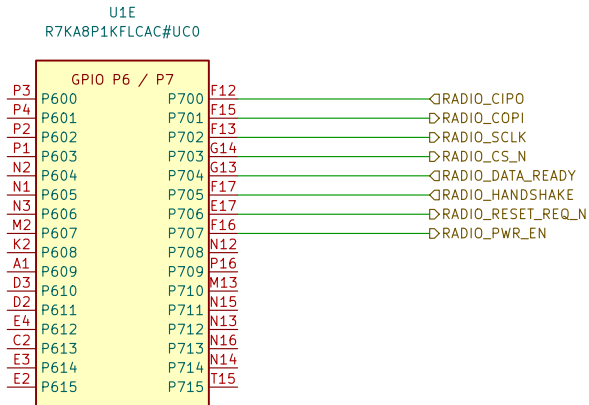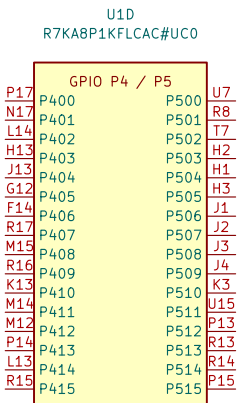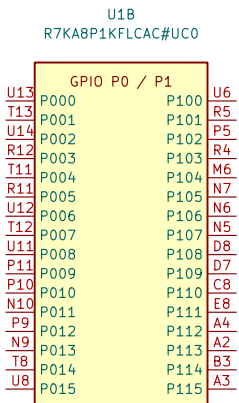


RADIO-008: SPIA_C P700..P703; IRQ26=P704, IRQ19=P705.
P706=RESET_REQ_N; P707=PWR_EN. Host-domain signals.
Switched-domain isolation and reset arbitration remain open.
Pin map + conflicts: ../design/radio_interface.md#radio-008-ra8p1-host-allocation

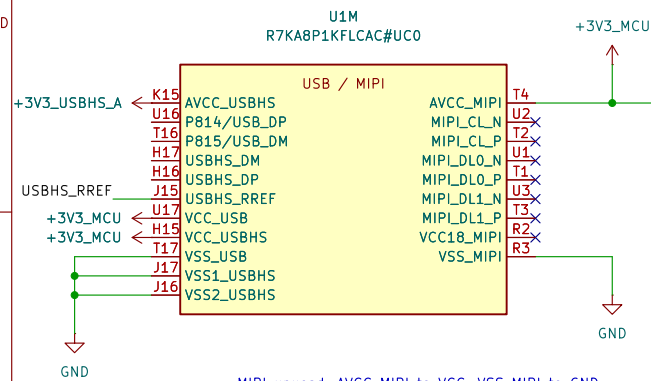


MIPI unused: AVCC_MIPI to VCC; VSS_MIPI to GND.
Leave VCC18_MIPI and all six D-PHY lanes open.
Firmware: MSTPCRC.MSTPC10=1 and MSTPC17=1.
RA8P1 HUM Rev.1.30, section 21.4, p.862.



USB-001: R6 USBHS current-reference resistor
Renesas QDG Table 2, p.7: 2.2 kohm +/-1%.
Rmin = 2200*(1-0.01) = 2178 ohm
Rmax = 2200*(1+0.01) = 2222 ohm
Initial tolerance only; not a derived PHY current.
Full basis + Python check: design/usb_interface.md



USB-002: USB full-speed supply / U1.U17, C40.
Renesas QDG Table 1, p.6: 3.3 V with 100 nF bypass.
C40 = 100*(1 +/-0.10) = 90..110 nF initial; 50 V X7R.
Nominal DC-bias estimate: 99.45 nF at 3.3 V (PWR-001).
Place C40 close to VCC_USB with a short VSS_USB return.
Full basis + Python check: design/usb_interface.md

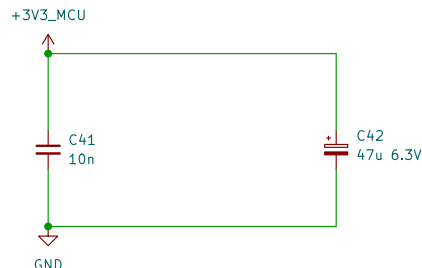

USB-003: USB-HS supply / U1.H15, C41, C42
Renesas QDG Table 1 p.6: 10 nF ceramic + 47 uF electrolytic.
C41 = 10*(1 +/-0.10) = 9..11 nF initial; 50 V X7R.
TDK nominal bias model: C41(3.3 V) = 10.084 nF (not guaranteed).
C42 = 47*(1 +/-0.20) = 37.6..56.4 uF initial; 6.3 V.
Voltage screening: 3.6/6.3*100 = 57.14% rating, not rail sign-off.
C42 positive to 3V3, negative to GND; no reverse voltage.
C41 close to H15; short returns to VSS1/VSS2_USBHS.
Full math + Python / qualification: ../design/usb_interface.md

PWR-001: C39 AVCC_MIPI bypass, 100 nF (QDG Table 2, p.7).
TDK C1608X7R1H104K080AA; also used at C6 and C16-C34.
Initial C = 100*(1 +/-0.10) = 90..110 nF; 50 V X7R.
TDK DC-bias samples: 99.5575 nF / 3.15 V; 98.9525 nF / 4 V.
C(3.3 V) = 99.5575 + (3.3-3.15)/0.85*(-0.605) = 99.45 nF.
Interpolated nominal reference, NOT a guaranteed minimum.
Final rail / PDN qualification open; 3.3/50*100 = 6.6% rating.
Full basis + Python check: design/power_decoupling.md

RA8P1 e-reader

Sheet: /RA8P1 IO allocation/
File: mcu_interfaces.kicad_sch

Title: RA8P1 IO allocation


Size: A3

Date: 2026-09-05

Rev: 0.3 DRAFT

KiCad E.D.A. 10.0.5

Id: 2/6



U1K
R7KA8P1KFLCAC#UC0


DC/DC

Inputs (Left):
A10
A11
B10
B11
A9
B9



Outputs (Right):
A7
A8
B7
B8
VLO
VLO
VLO

Power Supply: +3V3_MCU


Ground: GND

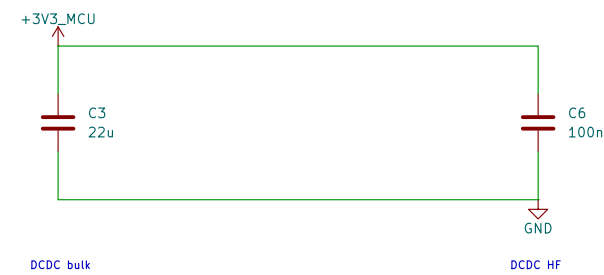

L1 DCR <= 100mOhm. Effective capacitance and inductor current rating require final MPN qualification. The 3.3 V source and return will be declared on the system-power sheet; no blanket ERC flags.

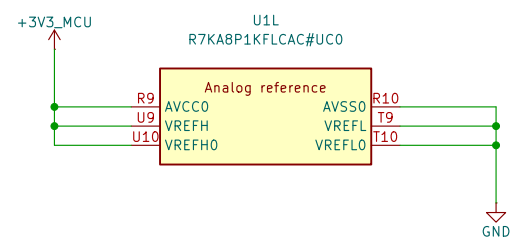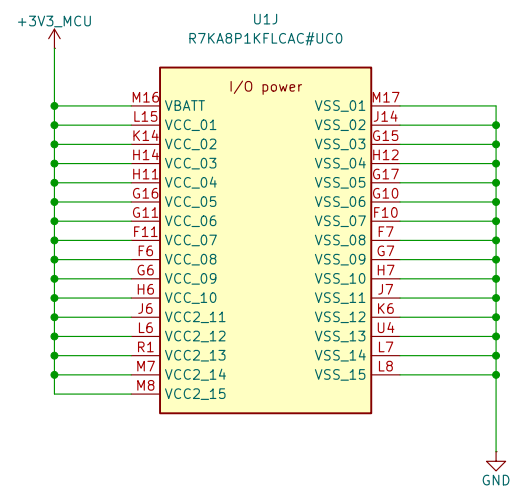

I/O DECOUPLING – 100 nF AT EACH NUMBERED VCC / VSS PAIR

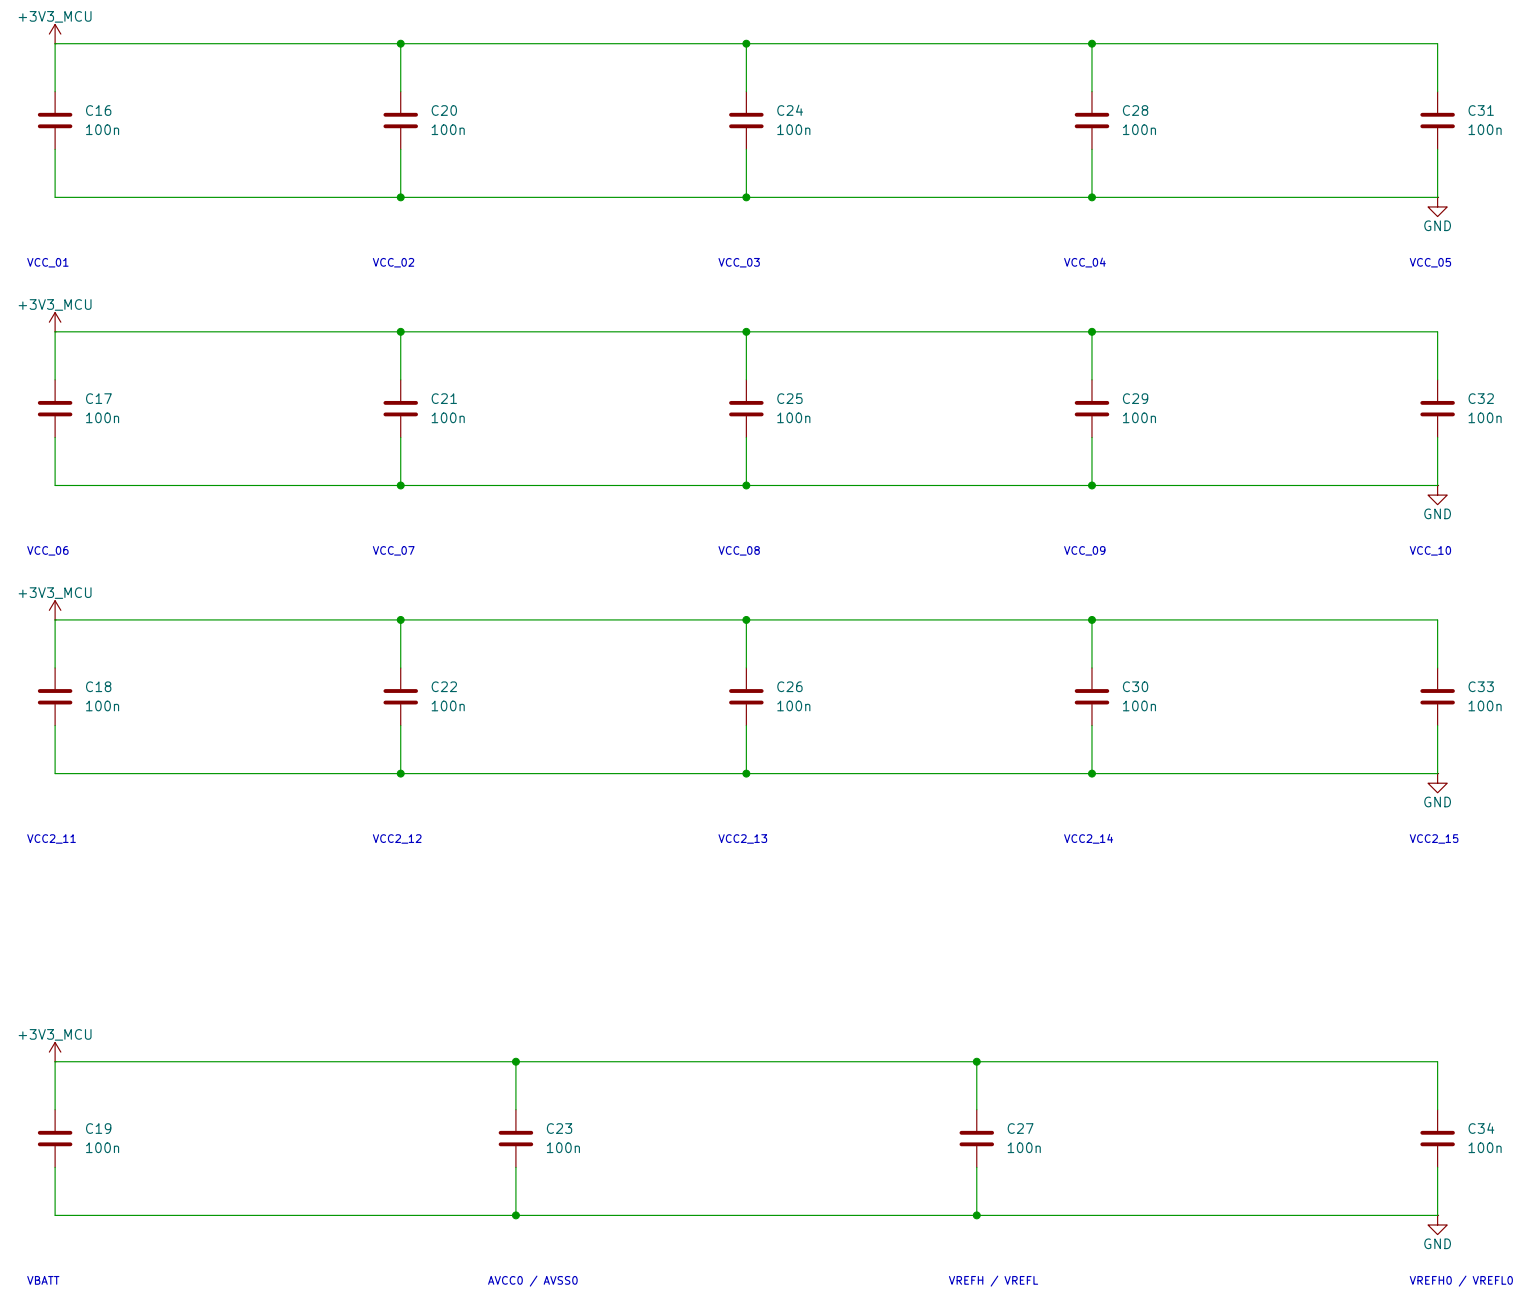

VCC and VCC2 use 3.3 V. All returns use one board ground plane.
VBATT follows the main rail; no separate backup-cell supply.
Analog references use AVCC0 / AVSS0. Place bypasses at named ball pairs.
USB/MIPI supplies remain on the interface sheet and are not yet wired.
HUM Rev.1.30: Table 69.2 p.4042; unused references: section 21.4 pp.861–862.
This is an electrical draft; capacitor MPN qualification remains open.

