

RA8P1 E-READER

Processor schematic development
Power networks are being implemented from RA8P1-specific references.
This revision is not a completed schematic or a fabrication release.

RA8P1 IO allocation



File: mcu_interfaces.kicad_sch

Global supplies: +3V3_MCU and GND.
Core regulator output MCU_VCORE stays local to the processor power sheet.

Remaining subsystem circuits follow epic #821 and issues #824-#834:
radio, memory/storage, USB/battery, system rails, display controller,
panel power, touch, warm/cool lighting, buttons and sensors.
No empty subsystem sheets are represented as completed circuits.

Footprint and PCB qualification are deferred by scope.

RA8P1 internal core regulator



File: mcu_core_power.kicad_sch

RA8P1 IO and analog supplies



File: mcu_supply_power.kicad_sch


RA8P1 clocks, reset and debug





File: mcu_clocks_debug.kicad_sch


Sheet: / File: ereader_rev1.kicad_sch		
Title: RA8P1 e-reader - schematic index		
Size: A3	Date: 2026-09-05	Rev: 0.3 DRAFT
KiCad E.D.A. 10.0.5	Id: 1/5	

[illegible]

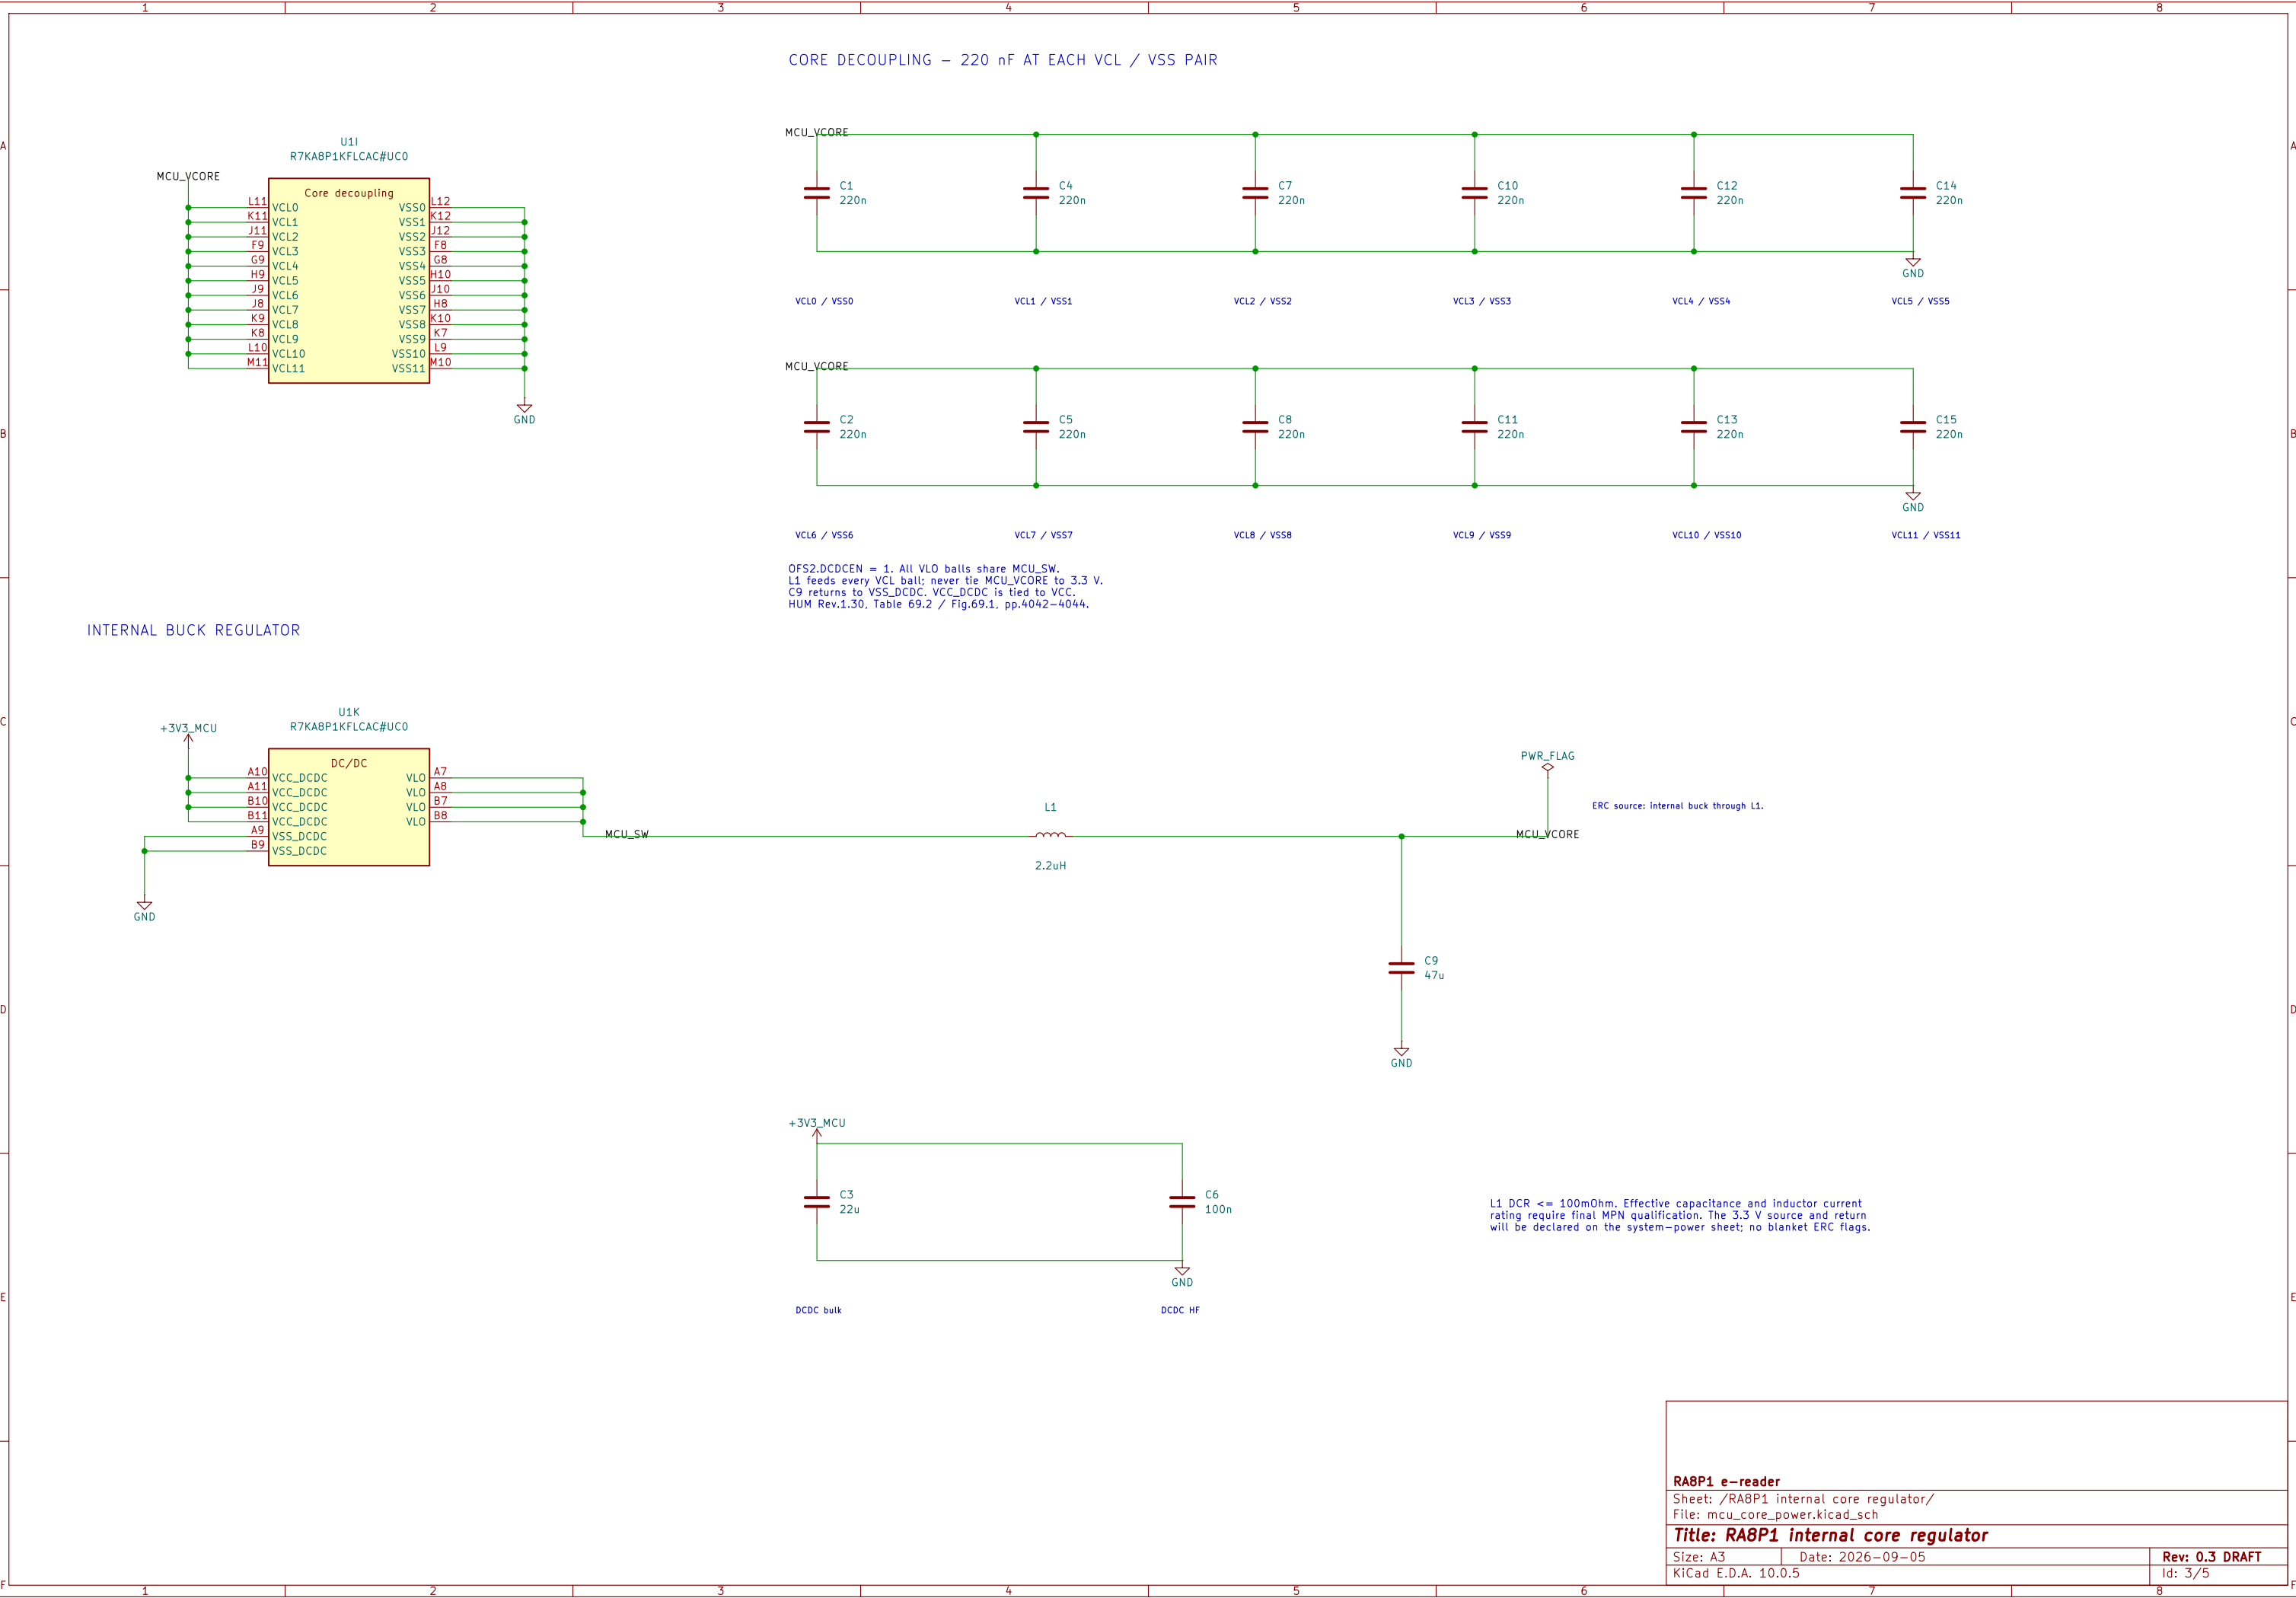

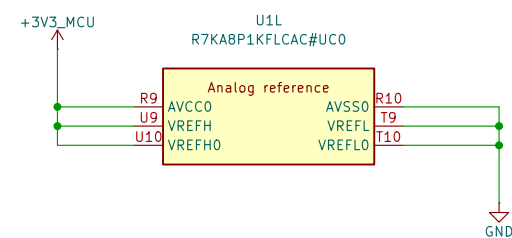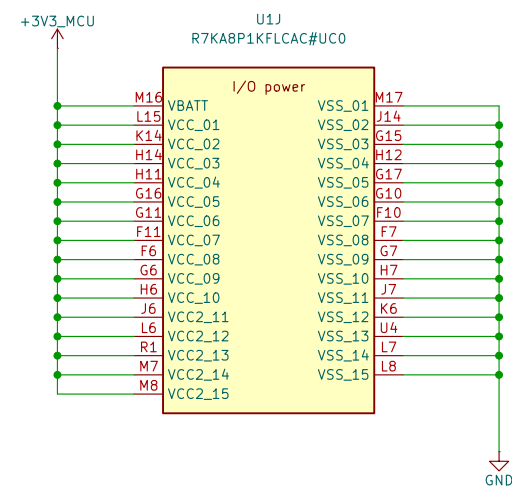

I/O DECOUPLING – 100 nF AT EACH NUMBERED VCC / VSS PAIR

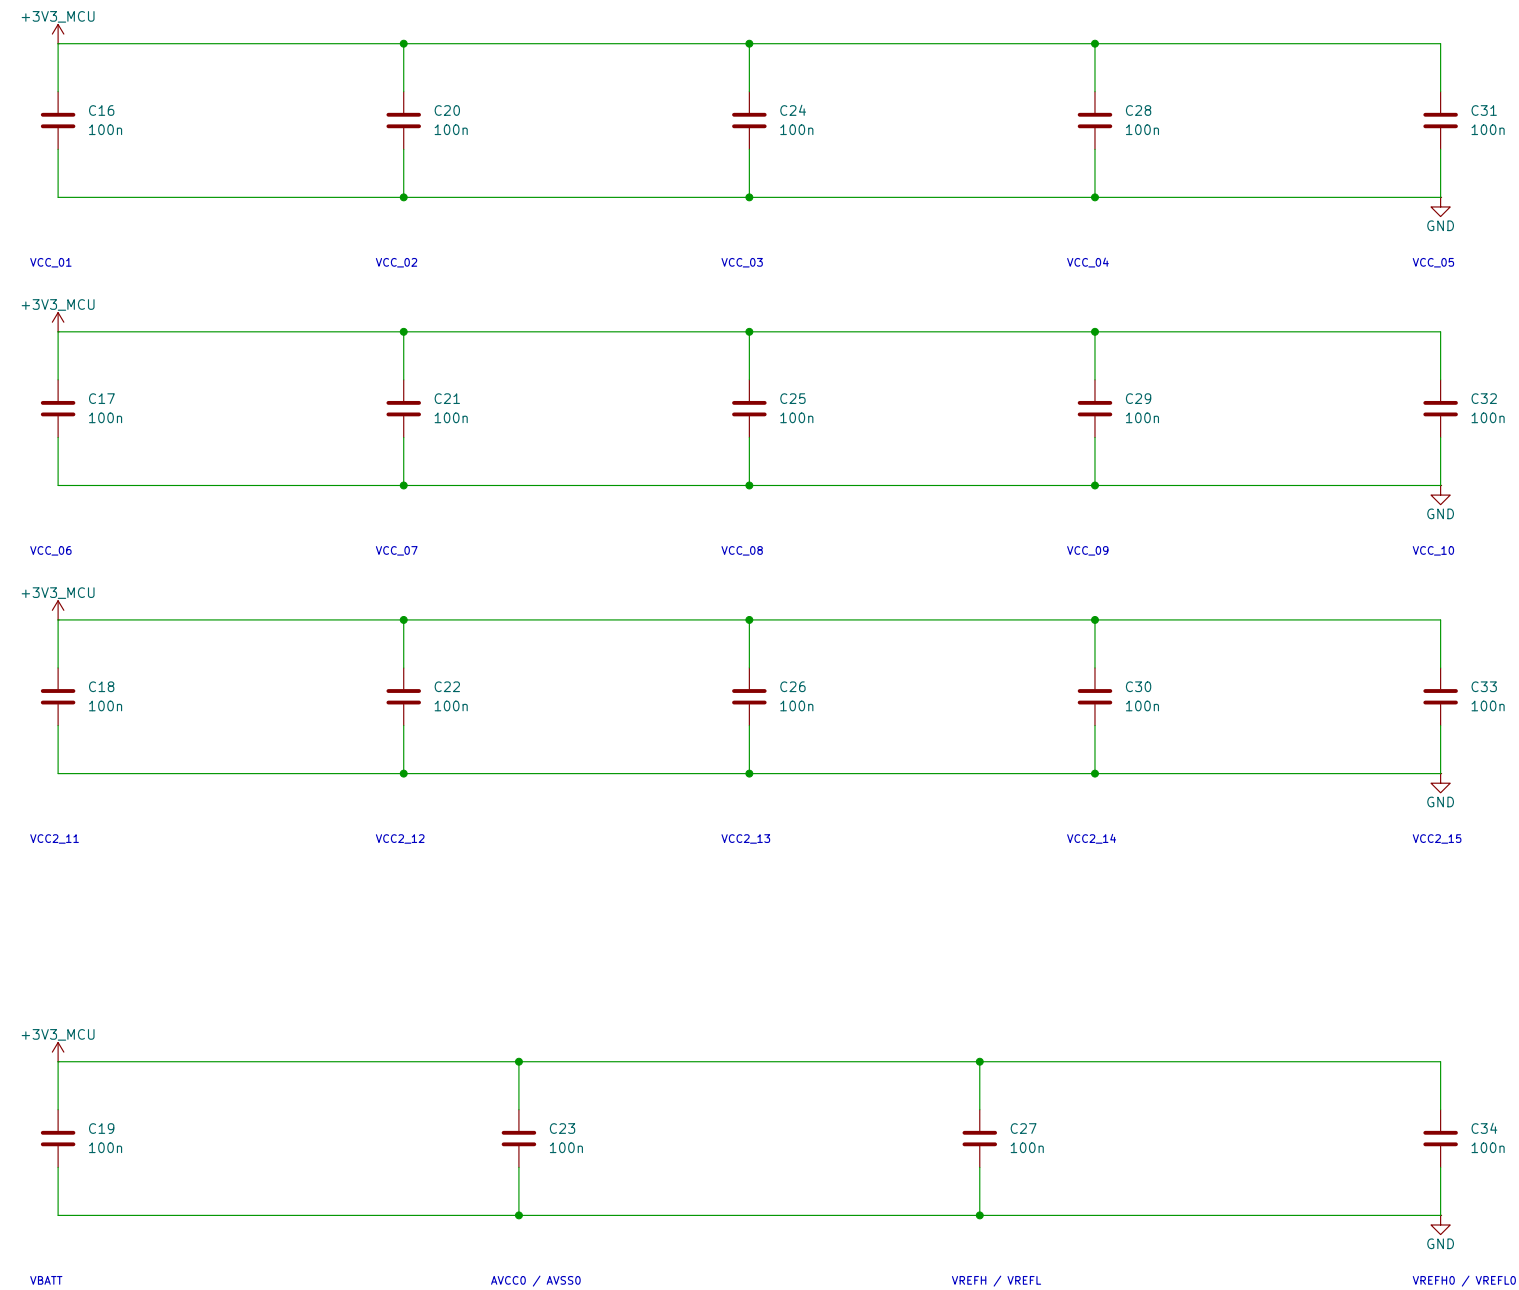

VCC and VCC2 use 3.3 V. All returns use one board ground plane. VBATT follows the main rail; no separate backup-cell supply. Analog references use AVCC0 / AVSS0. Place bypasses at named ball pairs. USB/MIP1 supplies remain on the interface sheet and are not yet wired. HUM Rev.1.30: Table 69.2 p.4042; unused references: section 21.4 pp.861–862. This is an electrical draft; capacitor MPN qualification remains open.

