




Just connect the RTS output ("I am ready to receive") to the CTS input ("You are clear to send" input) of your receiver.



Title: UART Section

Rev: 1.1

Id: 2/9



Sheet: /PS2 Receiver/
File: ps2.kicad_sch


Title: PS/2 Receiver

Size: A4	Date: 2024-10-10
----------	------------------

SIZE: A1	
KiCad E.D.A. 8.0.1	

Rev: 1.1

Id: 3/9

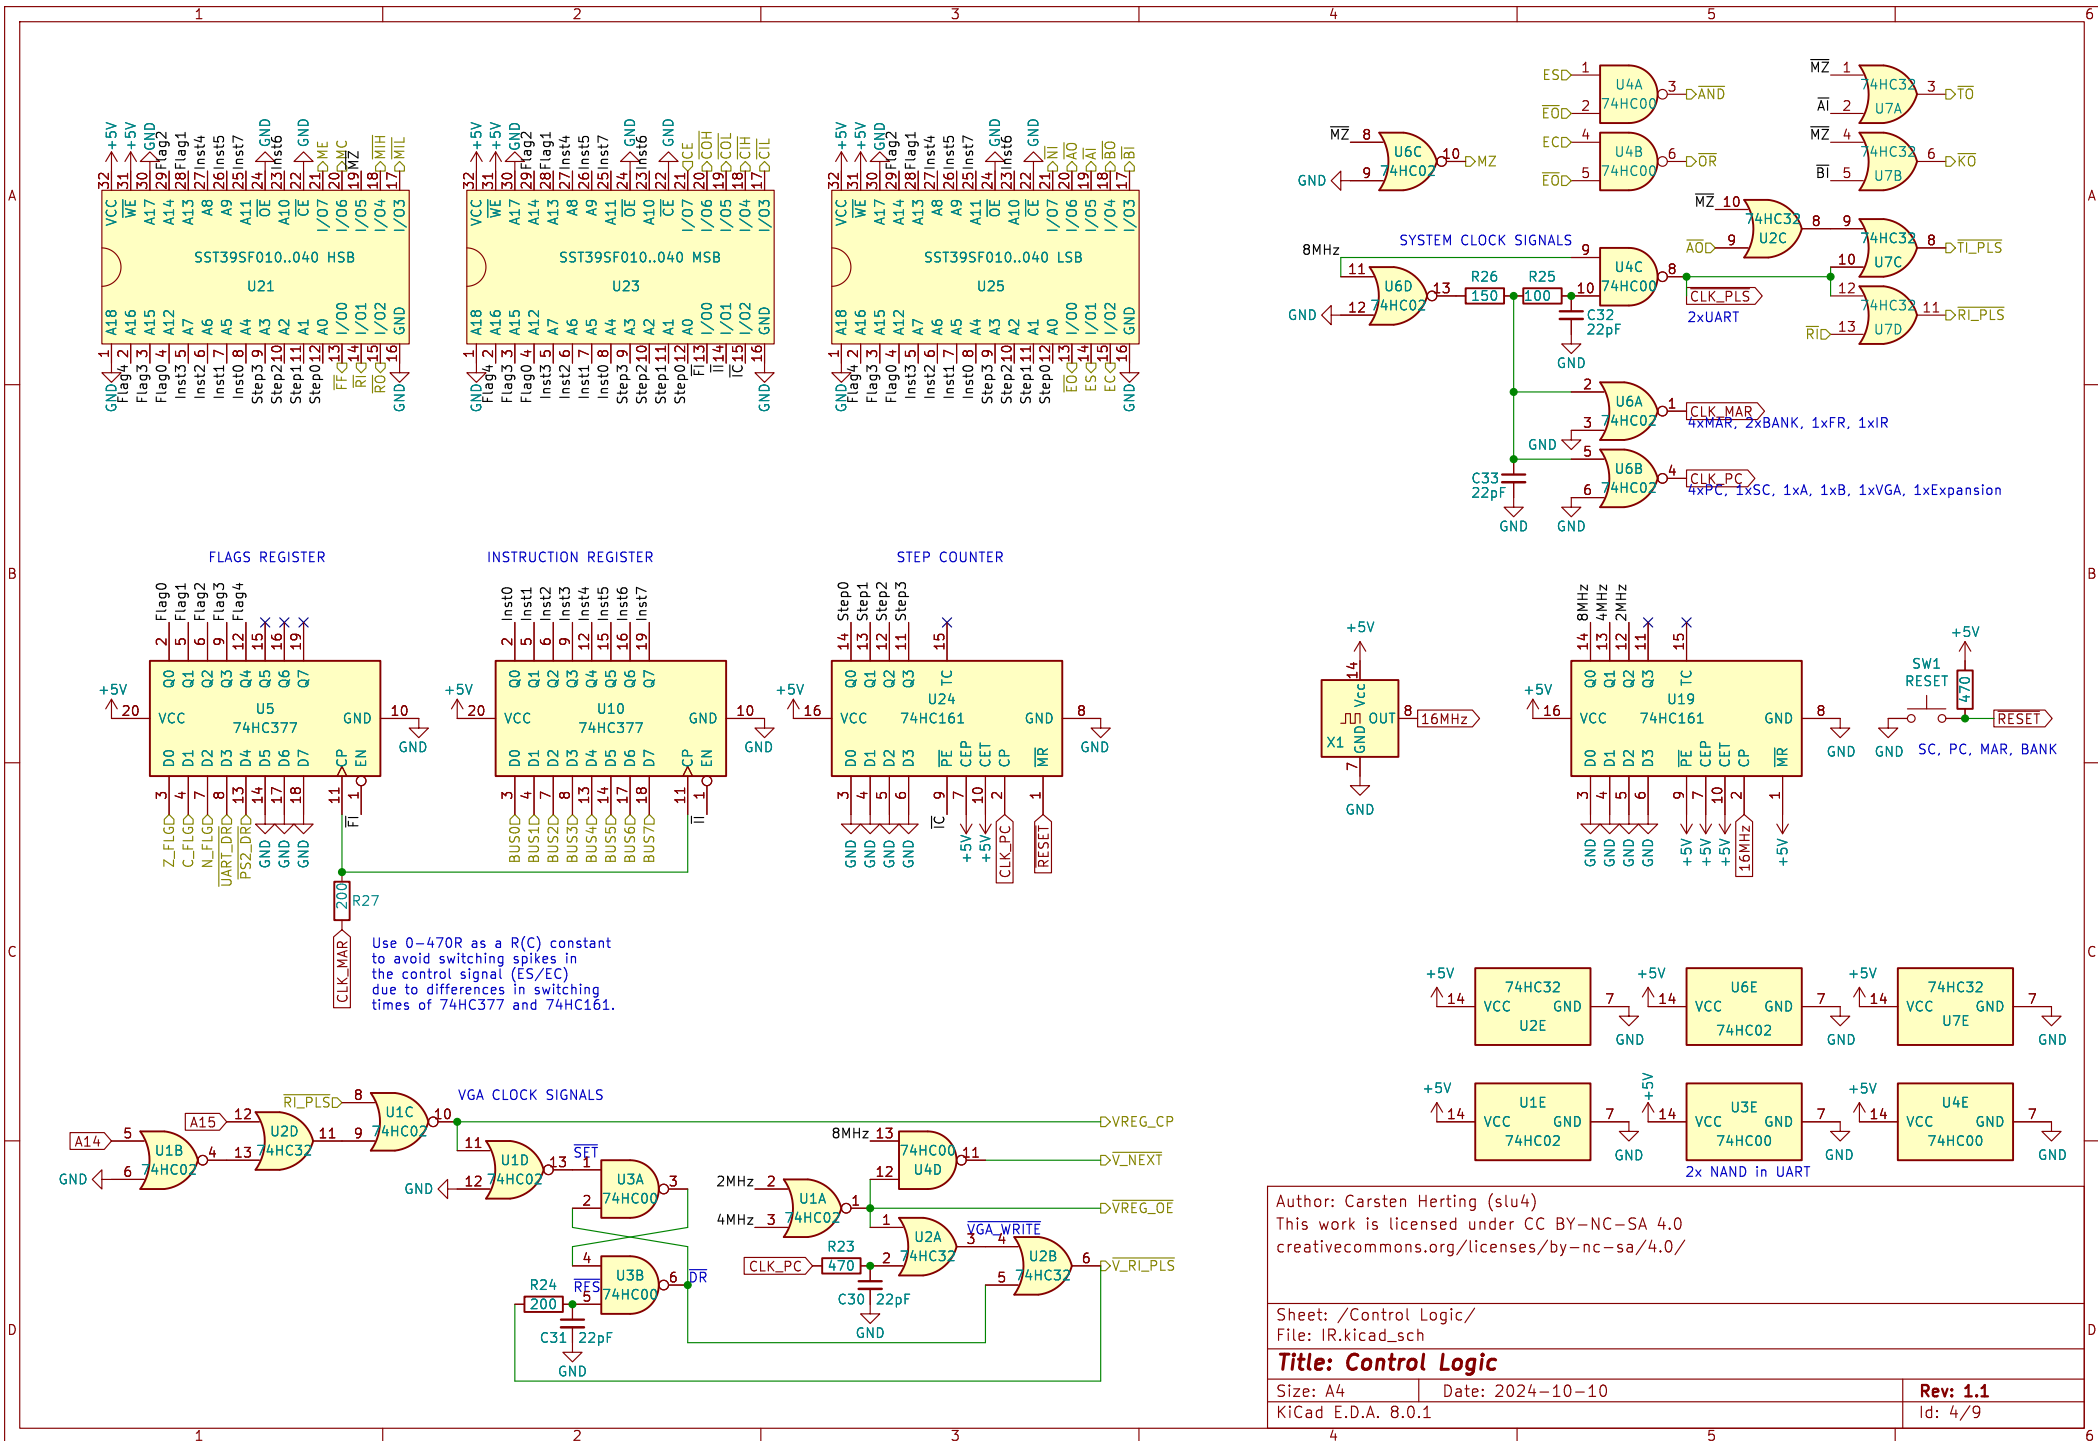



Author: Carsten Herting (slu4)
This work is licensed under CC BY-NC-SA 4.0
creativecommons.org/licenses/by-nc-sa/4.0/

Sheet: /Control Logic/
File: IR.kicad_sch

Title: Control Logic

Size: A4 Date: 2024-10-10
KiCad E.D.A. 8.0.1

Rev: 1.1
Id: 4/9

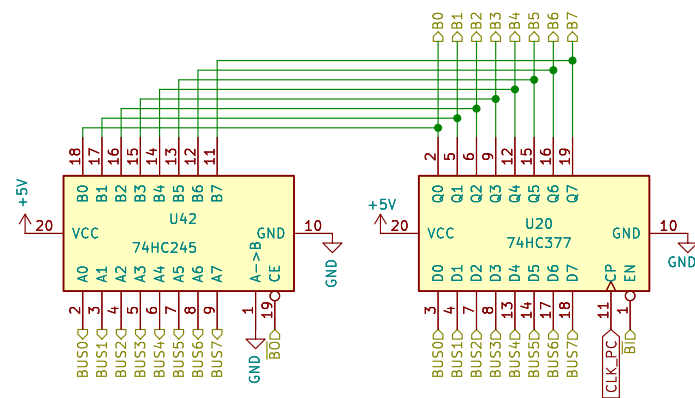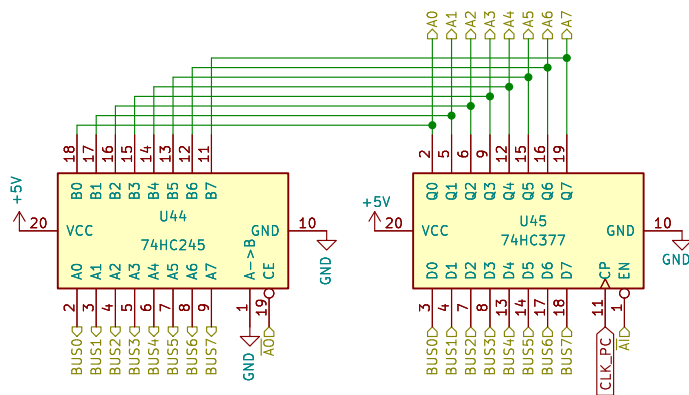


Author: Carsten Herting (slu4)
 This work is licensed under CC BY-NC-SA 4.0
creativecommons.org/licenses/by-nc-sa/4.0/

Sheet: /Registers/
 File: RegB.kicad_sch

Title: Registers A & B

Size: A4	Date: 2024-10-10	Rev: 1.1
KiCad E.D.A. 8.0.1		Id: 7/9

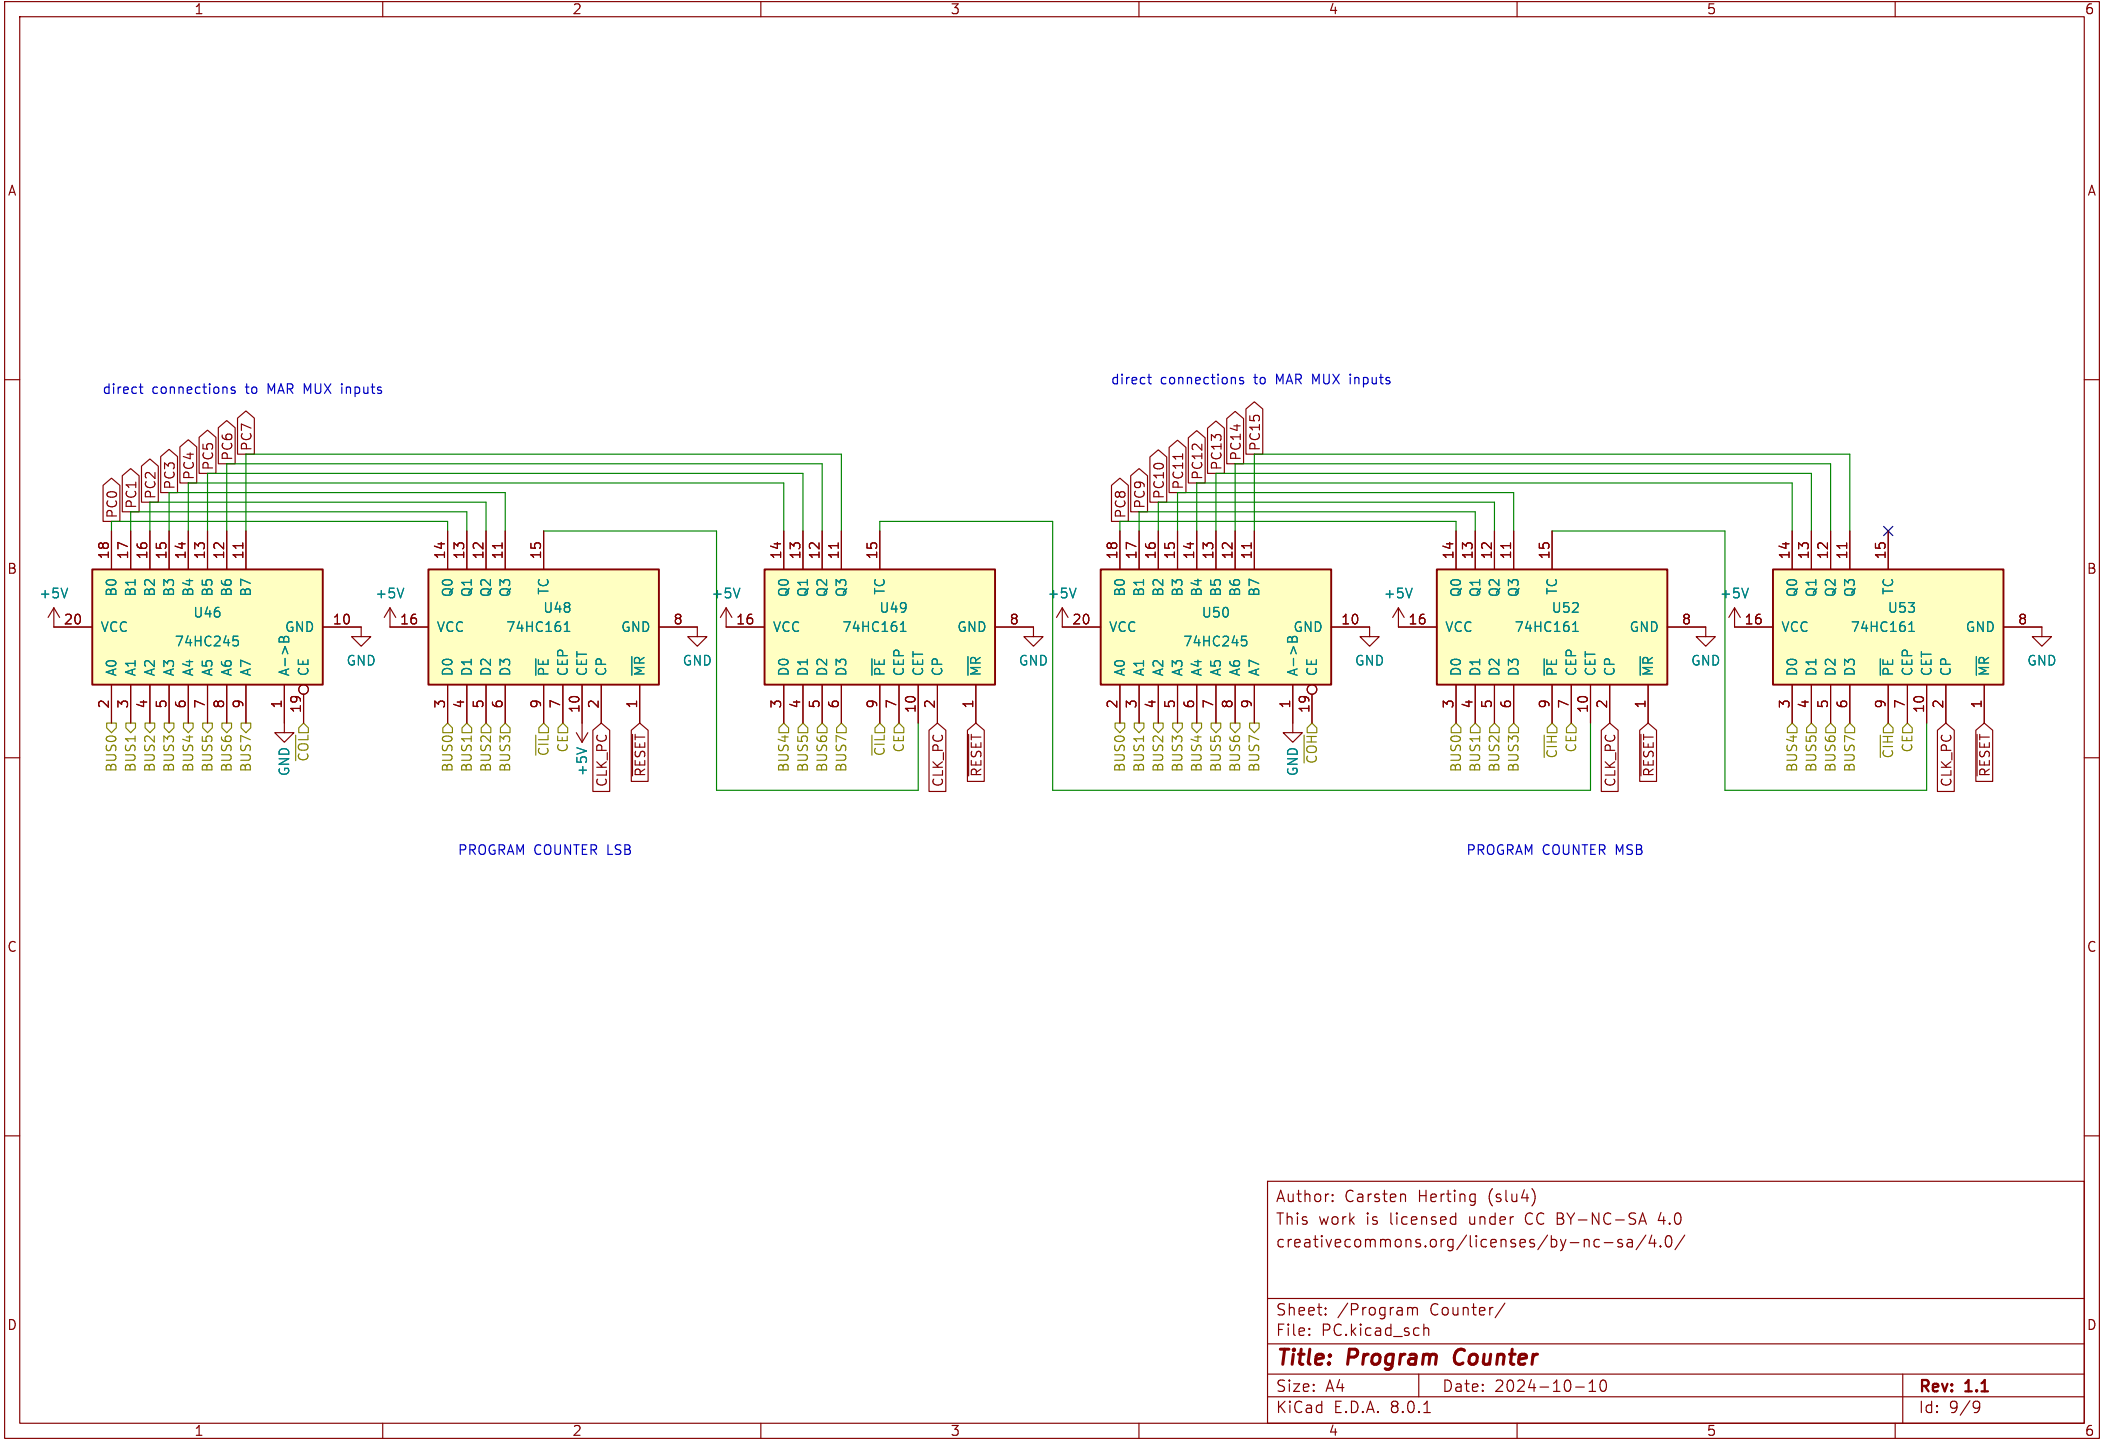

Author: Carsten Herting (slu4)
This work is licensed under CC BY-NC-SA 4.0
creativecommons.org/licenses/by-nc-sa/4.0/

Sheet: /Program Counter/
File: PC.kicad_sch

Title: Program Counter

Size: A4 Date: 2024-10-10

KiCad E.D.A. 8.0.1

Rev: 1.1

Id: 9/9

