


PLAN OF TOP OF BASE FRAME

SCALE : 1/20


제작 참고용 도면

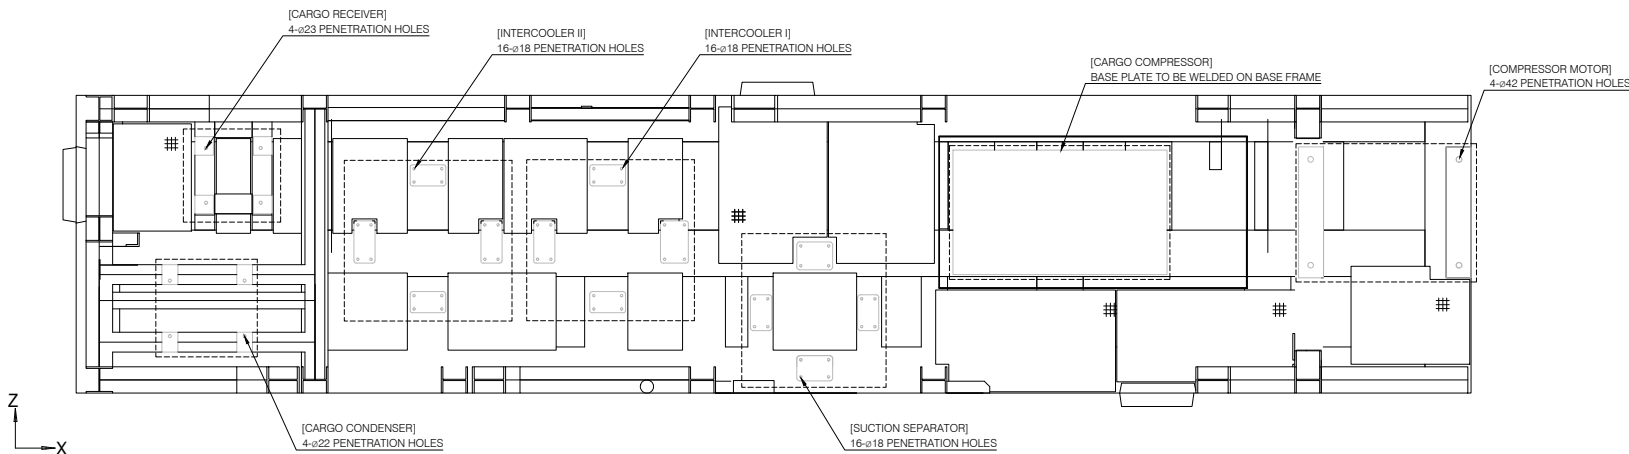


NOTES:

1. ALL SHARP CORNERS TO BE ROUNDED MIN. R2
2. GENERAL TOLERANCES ACCORDING TO ISO 2768-1m
3. DETAIL DIMENSION SHOULD BE CHECKED ON 3D MODELLING
4. JACKING PLATES FOR MOTOR SHOULD BE APPLIED ON ALL OF LEGS OF MOTOR (TOTAL: 8 EA)
5. ADJUSTABLE CHOCK FOR MOTOR SHOULD BE PROVIDED BY FABRICATION VENDOR. IF HEIGHT OF CHOCK IS DIFFERENT FROM DETAIL, FABRICATION VENDOR ADJUST HEIGHT OF WELDING LINER.

TYP. DWG OF SEAT FOR PRESSURE VESSEL

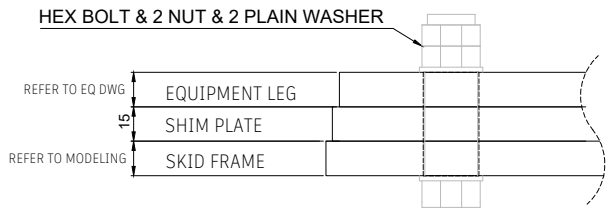

TYP. DWG OF SEAT FOR CARGO CONDENSER

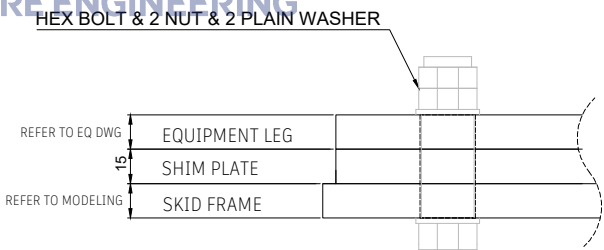

TORQUE VALUE FOR EQUIPMENT

EQUIPMENT	BOLT SIZE	TORQUE (NM)	MATERIAL (BOLT/NUT)
CARGO COMPRESSOR	M36	1400-1600	SCM435 GR 8.8 (HOT DIP GALV)
CARGO COMPRESSOR MOTOR	M36	1400-1600	SCM435 GR 8.8 (HOT DIP GALV)
SUCTION SEPARATOR	M16	106-148	SUS304
INTERCOOLER I	M16	111-156	SCM3 GR 8.8 (HOT DIP GALV)
INTERCOOLER II	M16	111-156	SCM3 GR 8.8 (HOT DIP GALV)
CARGO RECEIVER	M20	164-229	SUS304
INCONDENSABLE GAS RECEIVER	M20	164-229	SUS304
CARGO CONDENSER	M20	200	SUS304

NOTE) TORQUE VALUE ARE FOR LUBRICATED BOLTS



00	2028-02-24	SUBMITTED FOR INFORMATION	SJH			
REV.	DATE	DESCRIPTION	DRWN	CHKD	APPD	APPD



TITLE
FABRICATION & ASSEMBLY DETAIL DRAWING
FOR LPG RELIQUEFACTION SKID
EQUIPMENT FOUNDATION DETAIL DRAWING

3531 / 3532
PROJECT NUMBER