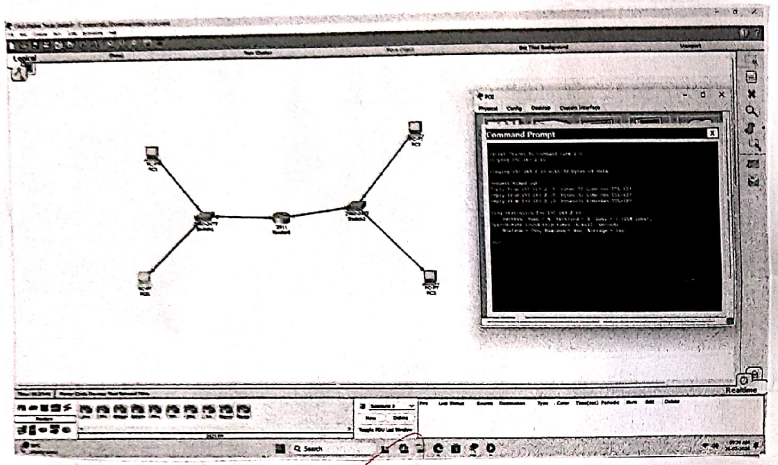


EX3A: TO UNDERSTAND THE ENVIRONMENT OF CISCO PACKET TRACER TO DESIGN A SIMPLE NETWORK.

AIM: To study the cisco packet tracer simulation environment and design a simple computer network using the networking devices available in CISCO PACKET TRACER.

ALGORITHM:

Step1: Open Cisco Packet Tracer

Step2: Select the required networking devices from device library.

Step 3: Place the devices on the workspace.

Step4: Connect the devices using appropriate cables.

Step 5: Configure IP addresses for all hosts.

Step 6: Verify connections

Step 7: Save network topology.

PROCEDURE.

1. Launch "Cisco Packet Tracer"
2. Drag and drop One Hub and one switch from the Network Devices section.
3. Add 4-6 PC's from end devices section
4. Connect the PC's using Copper straight-Through Cables.
5. Configure the IP address for each PC in the same subnet.
6. Check whether all links turn green
7. Save the network design.

OUTPUT:

1. Successfully created a simple network.
2. All devices are connected properly
3. IP addresses were configured.
4. Network Topology was created -

RESULT:

The Cisco Packet Tracer Environment was successfully understood and a simple network was designed using the available networking devices.