

2.4GHz 3216 Chip Antenna: SRD3216R2G4

Application:

ISM band, Telemeter, Telemetry, Bluetooth, zigbee, WI-FI, keyless entry system...

Bluetooth/Wireless LAN/Home RF

ISM band 2.4GHz applications

Features

SMD, high reliability, ultra Impact, Omni-directional...

Part number

SRD 3216 R 2G4
(1) (2) (3) (4)


(1) Product Code	SRD
(2) Product Size	3.6mm × 1.6mm
(3) Version type	Release
(4) Frequency	2.4GHz

Electrical Specification

Centre Frequency	2400-2500MHz
Peak Gain	1.2 dBi (XZ-V)
Impedance	50 Ohm
Return loss	10 dB (Min.)
Polarization	Linear
Azimuth Beamwidth	Omni-directional
Operation Temperature(°C)	-40 ~85°C

The specification is defined on EVB.

Dimension and Terminal Configuration

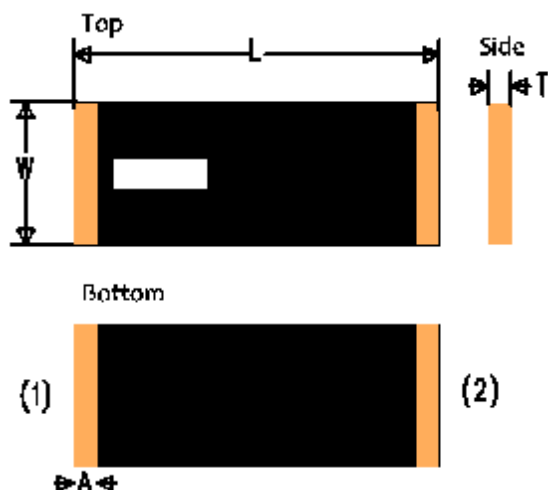

Dimension (mm)	
L	3.2+/-0.1
W	1.6+/-0.1
T	1.2+/-0.1
A	0.3+/-0.1


No.	Terminal Name
1	Feeding
2	Soldering

2.4GHz 3216 Chip Antenna: SRD3216R2G4

Evaluation Board Reference

PCB Dimension & Antenna Layout Reference


Test Board

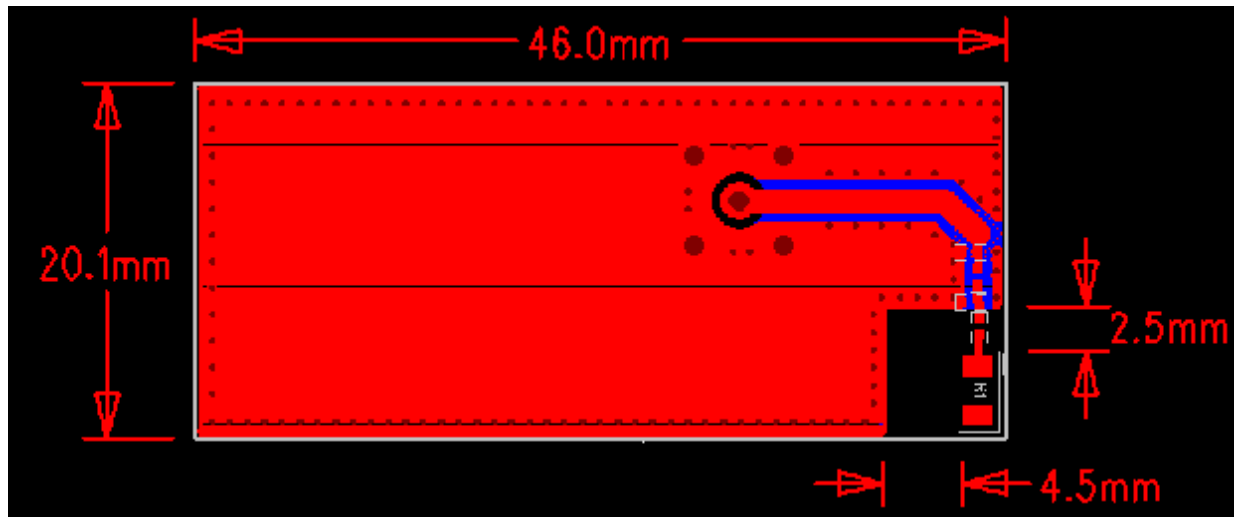

unit :mm

2.4GHz 3216 Chip Antenna: SRD3216R2G4

Electrical Characteristics

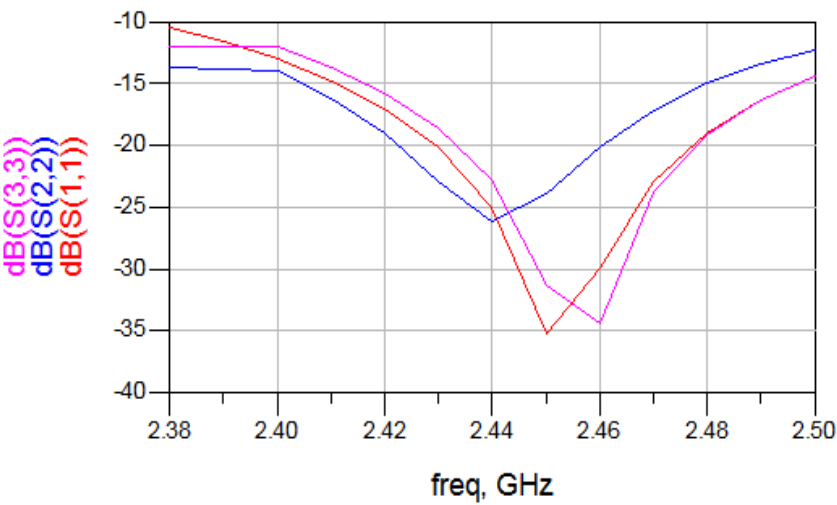

Frequency (MHz)	S11 (dB)
2400-2500MHz	-33.1

Revision History

Revision	Date	Content
1	2019/3/20	New issue