

# Magnetic Buzzer

## MCW12065-5V-2300-F



### DIMENSIONS


UNIT: mm

Tolerance:  $\pm 0.5$ mm


Wave soldering and washable

Housing material: NORLY

RoHS Compliance

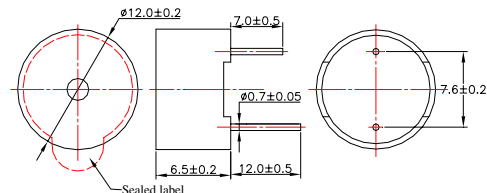

### FREQUENCY RESPONSE

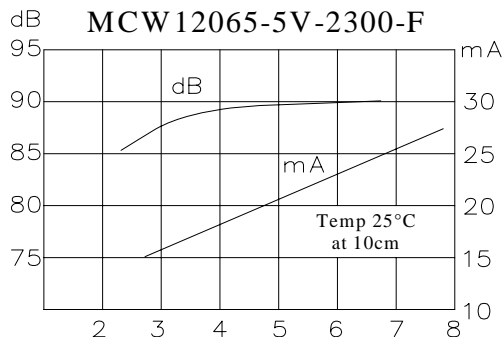

### SPECIFICATIONS:

Rated Voltage	(VDC)	5.0
Operating Voltage	(VDC)	3.0-8.0
Current on Rated Voltage	(mA)	30.0mA/5.0VDC
Resonant Frequency	(Hz)	2300 $\pm$ 500
Min Sound Pressure level	(dB)	85dB/5.0VDC/10CM
Operating temperature	(°C)	-20~+70
Storage temperature	(°C)	-30~+85
Weight	(g)	1.8