


25 CAL Cylinder with linear transducer

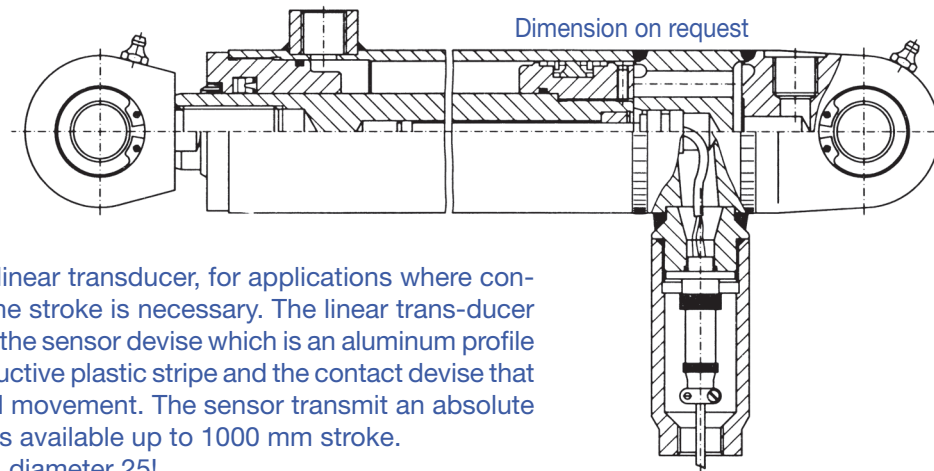

Cylinder with built in linear transducer, for applications where continuance reading of the stroke is necessary. The linear transducer consists of two parts, the sensor device which is an aluminum profile equipped with a conductive plastic stripe and the contact device that follows the piston rod movement. The sensor transmit an absolute analog output and it is available up to 1000 mm stroke.

Note! Min. piston rod diameter 25!

Technical information (for the transducer)

Pressure	35 Mpa
Speed	Max 1,0 m/s (contact us)
Working temp	-40°C to +125°C
Feed voltage	Max 40 V DC
Output	Depending on feed voltage
Resolution	Infinite
Linearity	$\pm 0,038 \dots 0,750\%$ of stroke (standard)
Repeatability	< 0,013 mm

In addition to the transducer presented above our cylinders can be supplied with transducers of noncontact types. For more information about these, please contact us.