

Pinout & Configuration

Clock Configuration

Proj

Software Packs

Pinout

Categories A-Z

RCC Mode and Configuration

Mode

High Speed Clock (HSE) Crystal/Ceramic Resonator

Low Speed Clock (LSE) Disable

☐ Master Clock Output

Configuration

Reset Configuration

NVIC Settings

GPIO Settings

Parameter Settings

User Constants

Configure the below parameters

Search (Ctrl+F)

System Parameters

VDD voltage (V)

3.3 V

Prefetch Buffer

Enabled

Flash Latency (WS)

0 WS (1 CPU cycle)

RCC Domains



Type here to search



F1

F2

F3

F4

F5


F6


F7


F8

F9

F10

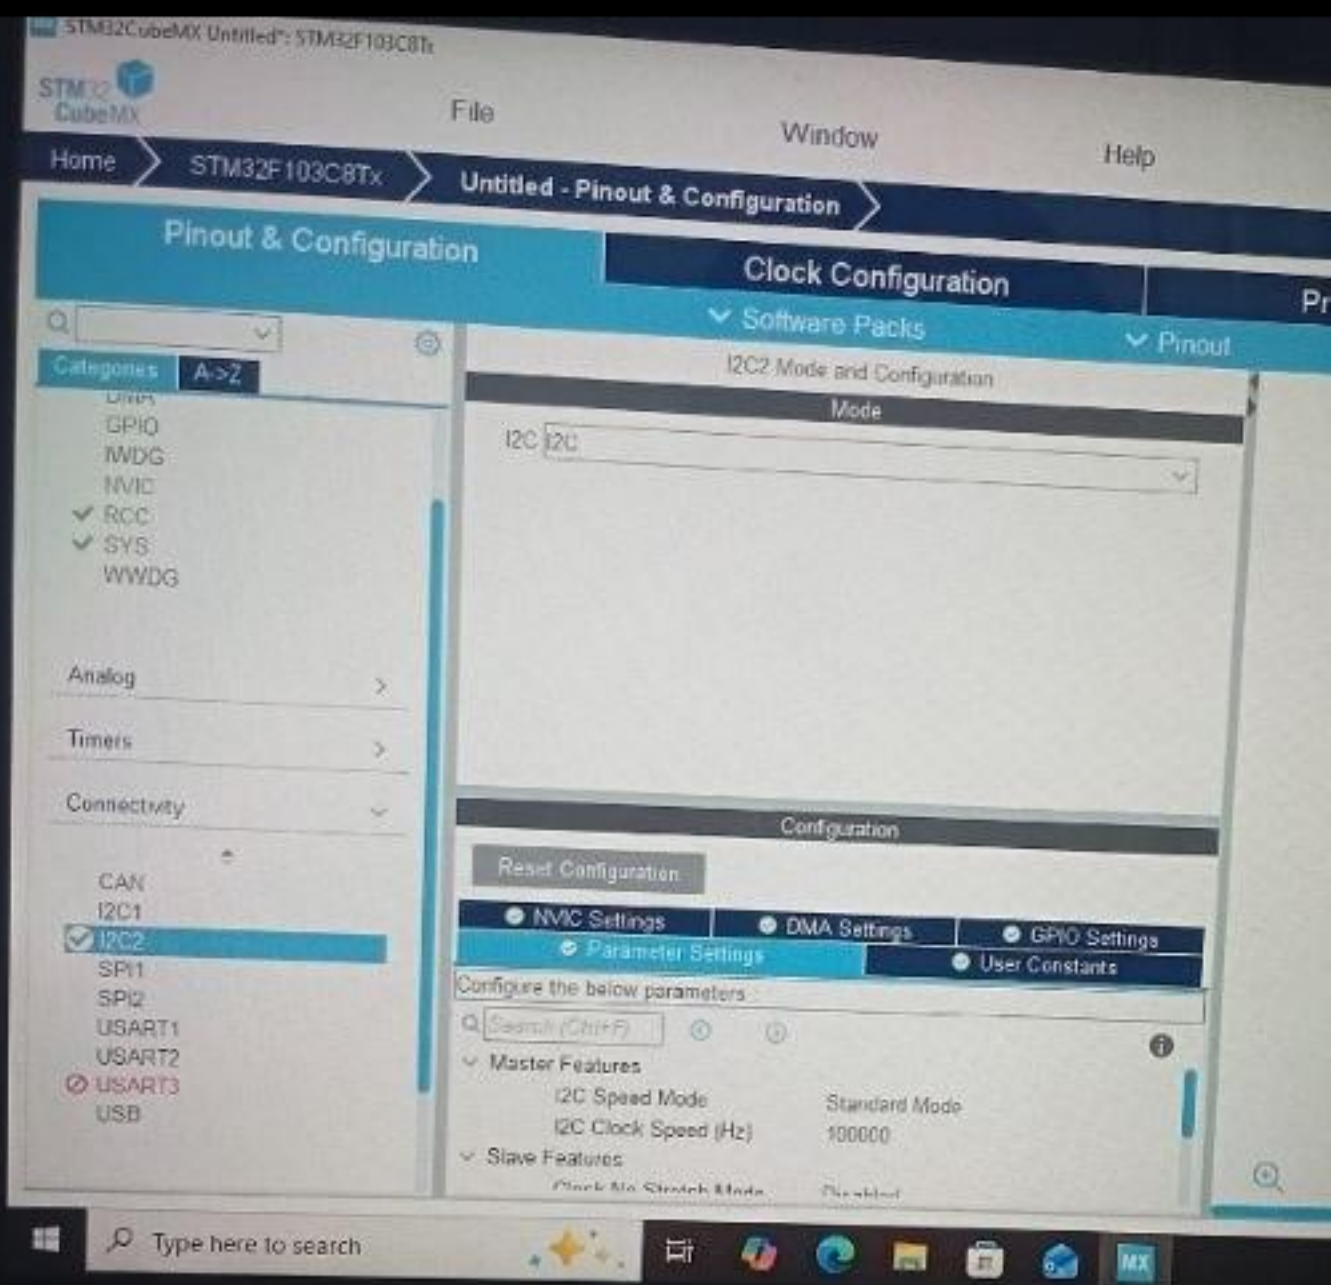

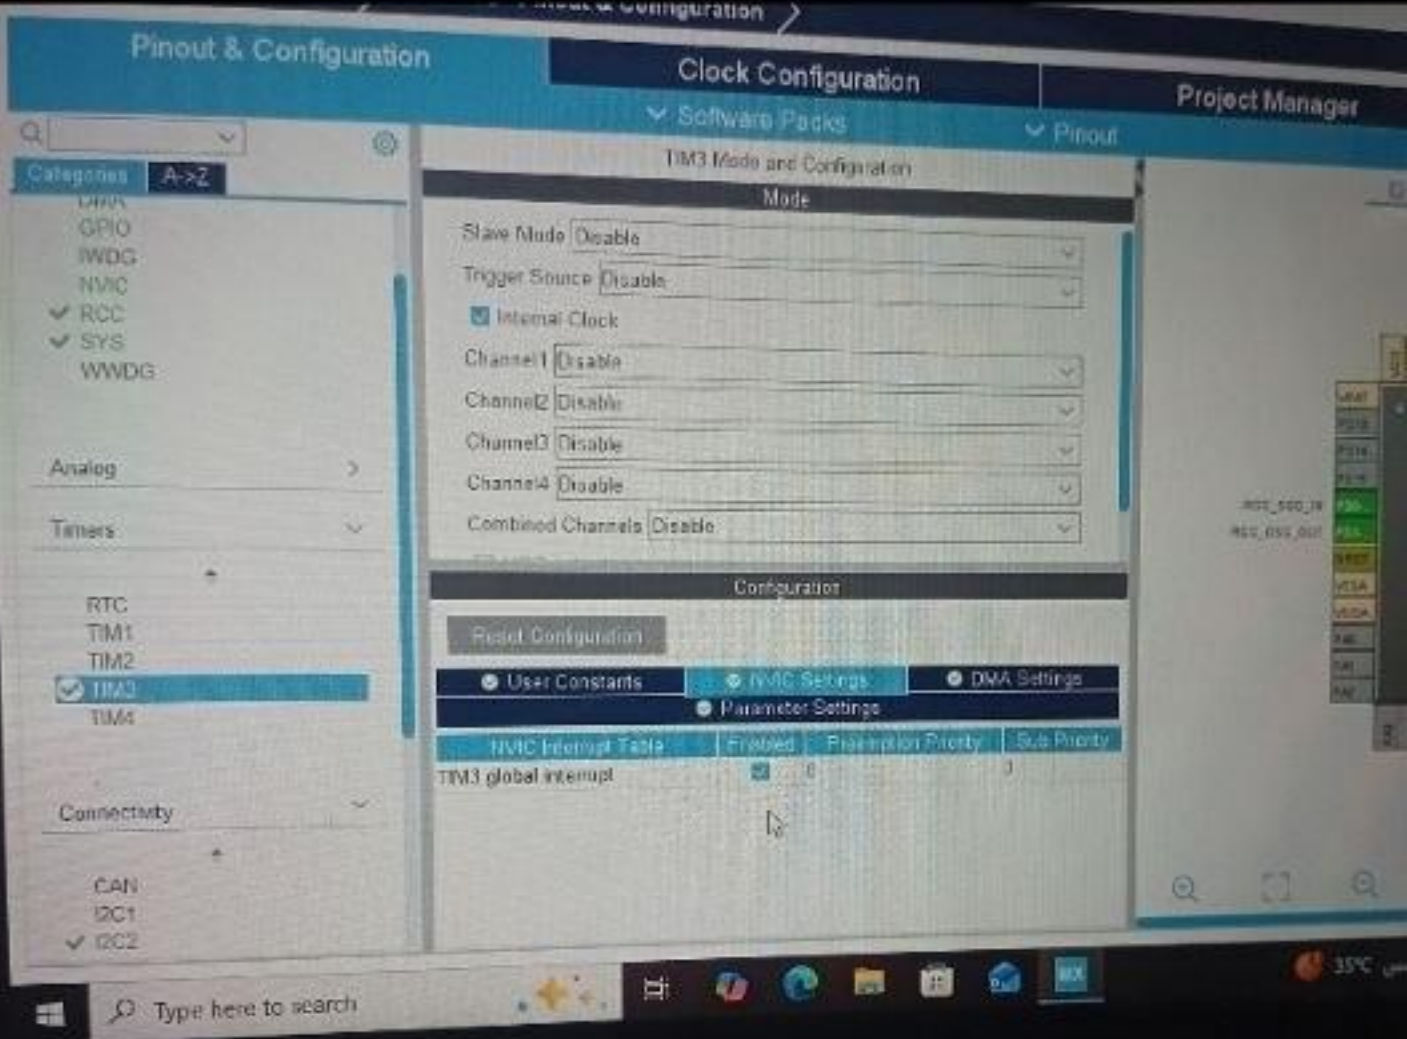

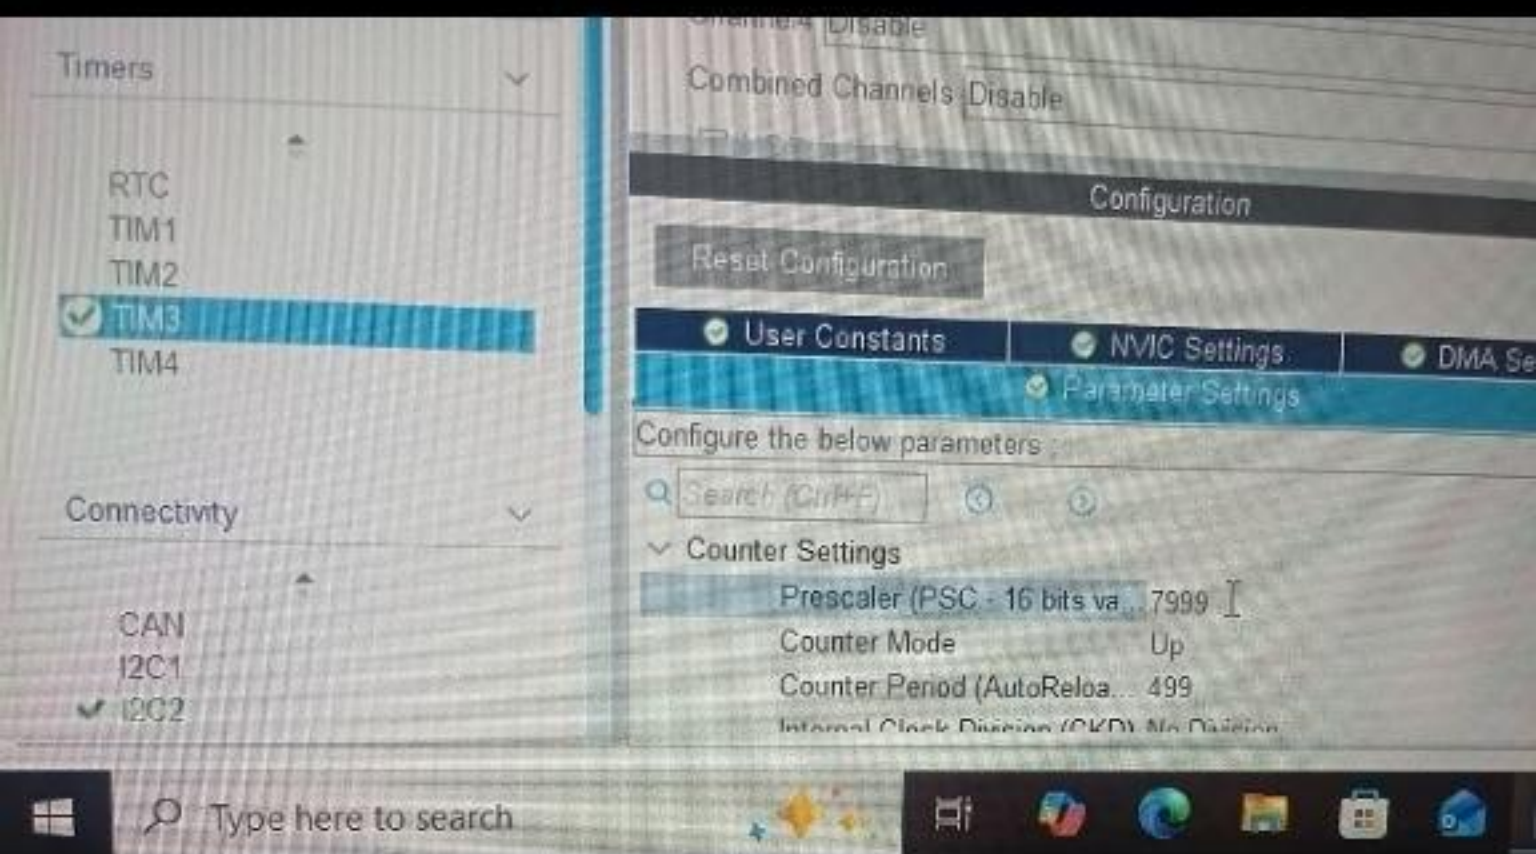

ed*: STM32F103C8Tx

File

Window

Help

32F103C8Tx

Untitled - Pinout & Configuration

t & Configuration

Clock Configuration

Projec

Software Packs

Pinout

TIM3 Mode and Configuration

Mode

Slave Mode Disable

Trigger Source Disable

☒ Internal Clock

Channel1 Disable

Channel2 Disable

Channel3 Disable

Channel4 Disable

Combined Channels Disable

Configuration

Reset Configuration

User Constants

NVIC Settings

DMA Settings

Parameter Settings

Configure the below parameters :

Search (Ctrl+F)

Counter Settings

Prescaler (PSC - 16 bits va 7999

Counter Mode Up

Counter Period (AutoReloa... 499

Internal Clock Prescaler (PVD) No Prescaler

e here to search