
Professional Online Academy Vu Topper RM

CS501-Advance Computer Architecture Update MCQ'S Quiz-4 File

Follow Us on YouTube:
@vutopperrm

For More Help Contact What's app Me!!!
Number's = # 0322-4021365, 0316-4980094

Rizwan Manzoor
Vu Topper RM

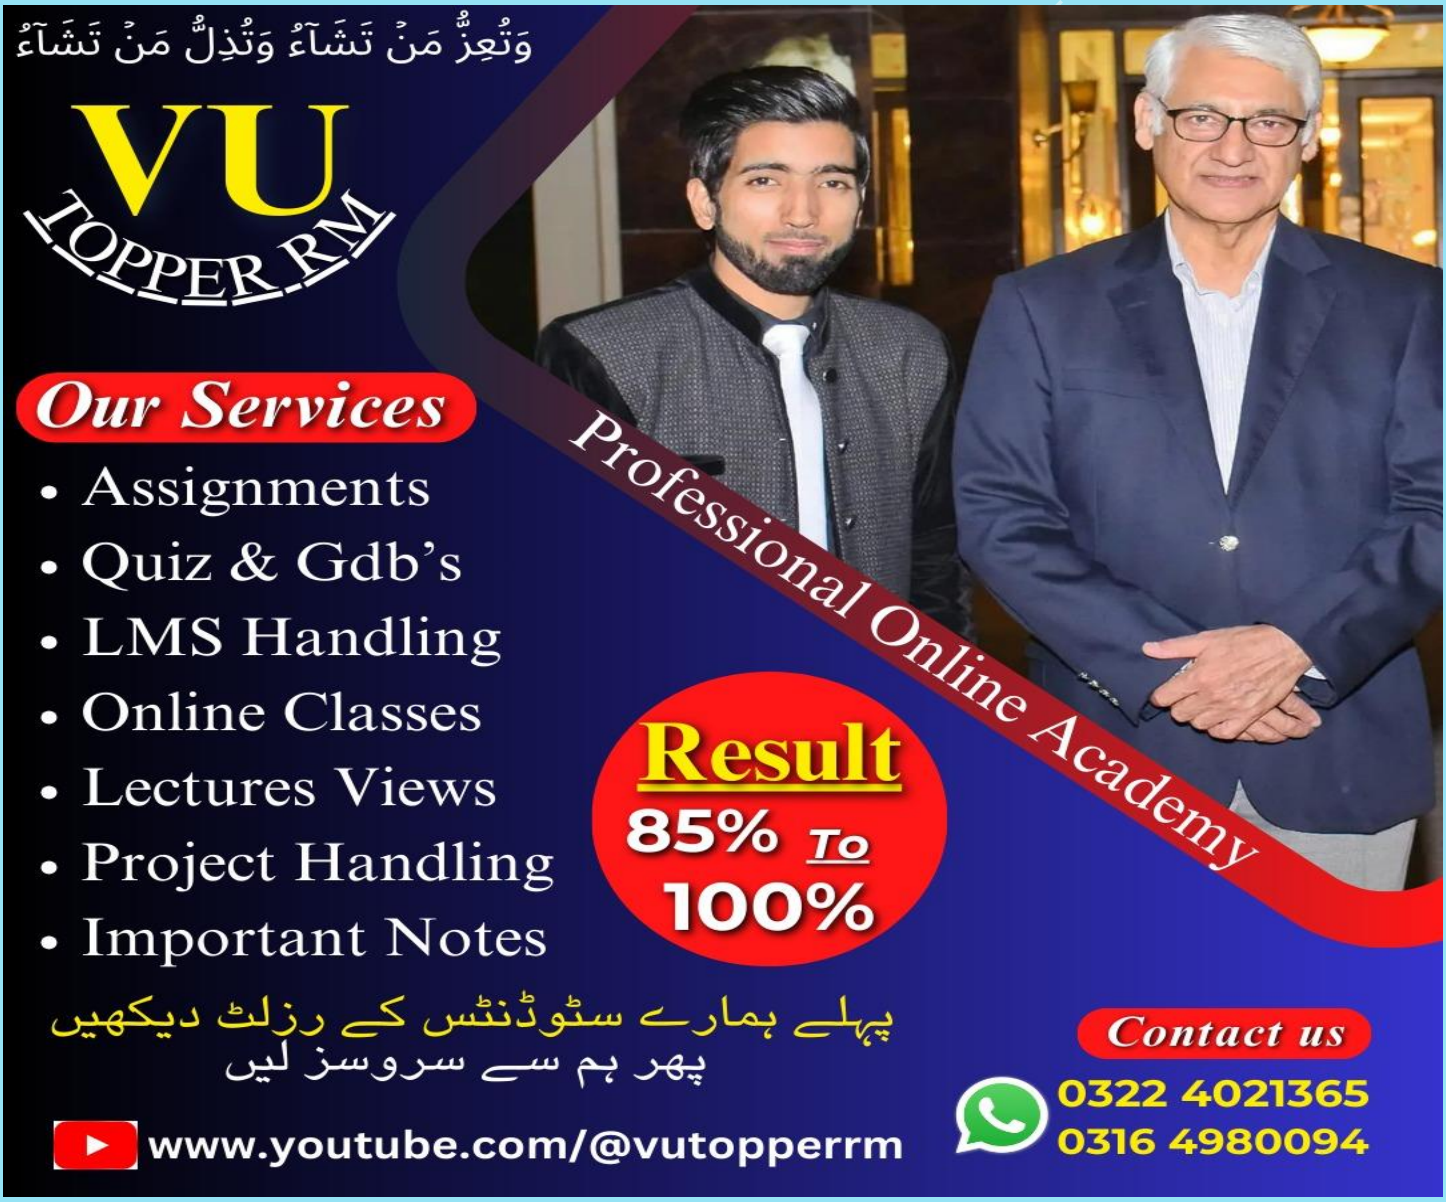

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Which one of the following is NOT a technique used when the CPU wants to exchange data with a peripheral device?

A. Direct Memory Access (DMA)
B. Virtual Memory
C. Interrupt driven I / O
D. Programmed I / O

The main memory is usually divided into partitions, one for ___ and other for _____.
Base Register , Limit Register

A. Operating system , User processes
B. Processes , Virtual Memory
C. Operating System , CPU
D. Answer Operating System , CPU

The average latency to the desired data is halfway round the disk so, what will be the average rotational latency if the disk rotates at 20,000 rpm.

A. 1.25ms
B. 1.0ms
C. 1.5ms
D. 2.0ms

Raid level __ distributes the parity strips across all disks.

A. 2
B. 5
C. 4
D. 3

How Interrupt driven I/O is better than polling because?
(A) Interrupt driver I/O is enhanced version of polling.
(B)Interrupt driven I/O is easy to program.
(C)Interrupt driver is easy to design

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Vu Topper RM

(D)Interrupt driver I/O does not waste time on checking which device is available.

The ___ of an m digit number x is \[{x^c} = {b^m} - 1 - x\]

A. Biased Representation
B. Radix compliment
C. Signed Magnitude form
D. Diminished Radix Compliment

Question No:1 **(Marks:1)** **Vu-Topper RM**

Adding a data pin to a chip with 2^m words of s bits increases the number of bits it can store by only a factor of _____

A. s/(s+1)
B. s^2/s
C. (s+1)/s **Page 320**
D. (s+2)/s

Question No:2 **(Marks:1)** **Vu-Topper RM**

The_____is m-bits wide and contains memory address generated by the CPU directly connected to the m-bit wide address bus Booth Recording

A. Program counter (PC)
B. Instruction Register(IR)
C. memory Buffer Register(MBR)
D. memory address register (MAR) **Page 316**

Question No:3 **(Marks:1)** **Vu-Topper RM**

_____ is a read-mostly memory that can be written into at any time without erasing prior contents

A. PROM
B. EPROM
C. EEPROM **Page 321**
D. Main memory

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Vu Topper RM

Question No:4 **(Marks:1)** **Vu-Topper RM**

By which file extension does the FALCON-A Assembler loads a FALCON-A assembly file?

A. .src
B. .exe
C. .org
D. .asmfa **Page 08**

Question No:5 **(Marks:1)** **Vu-Topper RM**

The conversion of numbers from a representation in one base to another is known as_____

A. Radix Conversion **Page 301**
B. Number Representation
C. Decimal representation
D. Hexadecimal Representation

Question No:6 **(Marks:1)** **Vu-Topper RM**

In Single-Precision Binary Floating Point Representation the exponent is _____

A. 1 bit
B. 8 bits **Page 313**
C. 11 bits
D. 23 bits

Question No:7 **(Marks:1)** **Vu-Topper RM**

In 1x8 memory cell arrangement, each block is connected through a bi-directional data bus implemented with _____ tri-state buffer(s).

A. 1
B. 2 **Page 317**
C. 4
D. 8

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Vu Topper RM

Question No:8 **(Marks:1)** **Vu-Topper RM**

Taking control of the system bus for a few bus cycles is known as _____.

A. Bus Stealing
B. None of given
C. Cycle Stealing **Page 288**
D. Cycle Transfering

Question No:9 **(Marks:1)** **Vu-Topper RM**

_____ is nonvolatile and may be written into only once.

E. PROM **Page 321**
F. EPROM
G. EEPROM
H. Main memory

Question No:10 **(Marks:1)** **Vu-Topper RM**

human works with base 10 and computers work with base _____.

A. 2 **Page 316**
B. 8
C. 10
D. 16

Question No:11 **(Marks:1)** **Vu-Topper RM**

The main issue/s in error control is/are_____.

A. Correction of Error
B. Avoidance of Error
C. Detection of Error
D. Both Detection of Error and Correction of Error **Google**

Question No:12 **(Marks:1)** **Vu-Topper RM**

Adding an address pin to a memory chip increases the capacity of memory by a factor of _____.

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Vu Topper RM

A. 2 **Page 320**
B. 3
C. 1.5
D. 2.5

Question No:13 **(Marks:1)** **Vu-Topper RM**
_____ is much faster than EPROM.
A. Rom
B. Hard disk
C. Flash Memory **Page 321**
D. Main memory

Question No:14 **(Marks:1)** **Vu-Topper RM**
The _____ is w-bit wide and contains a data word, directly connected to the data bus which is b-bit wide memory address register (MAR) .
A. Program counter (PC)
B. Instruction Register(IR)
C. memory Buffer Register(MBR) **Page 316**
D. memory address register (MAR)

Question No:15 **(Marks:1)** **Vu-Topper RM**
The information about interrupt vector is given in 8-bits, from bit 0 to 7, which is translated to bit _____ on the data bus.
A. 0 to 7
B. 8 to 15
C. 16 to 23 **Page 260**
D. 11 to 18

Question No:16 **(Marks:1)** **Vu-Topper RM**
For _____ of an error we just need to know that there exists an error.
A. Detection **Page 297**
B. Correction

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Vu Topper RM

C. None of the given
D. Both Correction and Detection

Question No:17 **(Marks:1)** **Vu-Topper RM**
Which is a status bit that indicates whether the block in cache has been modified or not modified?
A. End bit
B. Dirty bit **Page 327**
C. Access bit
D. Presence bit

Question No:18 **(Marks:1)** **Vu-Topper RM**
Which I/O technique will be used by a sound card that may need to access data stored in the computer's RAM?
A. Polling
B. Programmed I/O
C. Interrupt driven I/O
D. Direct memory access(DMA) **Page 271**

Question No:19 **(Marks:1)** **Vu-Topper RM**
A 16k×4 Static RAM Chip is arranged in the form of four _____ memory cells.
A. 4×16
B. 16×4
C. 64×256 **Page 318**
D. 256×256

Question No:20 **(Marks:1)** **Vu-Topper RM**
A typical one level decoder has _____ input(s) and _____ output(s).
A. n, n
B. n, 2^n **Page 318**
C. 2^n, n

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Vu Topper RM

D. n, n^2

Question No:21 **(Marks:1)** **Vu-Topper RM**

When a particular sector is found, the data is transferred to _____.

A. RAM

B. I/O module **Page 293**

C. Cache memory

D. Instruction register

Question No:22 **(Marks:1)** **Vu-Topper RM**

_____ is the concept in which a process is copied into the main memory from the secondary memory according to the requirement.

A. Paging

B. Segmentation

C. Logical Partition

D. Demand Paging **Page 329**

Question No:23 **(Marks:1)** **Vu-Topper RM**

What is the basic idea of "carry look ahead"?

A. To reduce congestion

B. To solve the redundancy

C. To speed up the ripple carry **Page 308**

D. To synchronize with CPU clock

Question No:24 **(Marks:1)** **Vu-Topper RM**

Given an m-digit base b number x, the _____ of x is xc=(bm−x)modbm

A. Radix Compliment **Page 304**

B. Biased Representation

C. Signed Magnitude Form

D. Diminished Radix Compliment

Question No:25 **(Marks:1)** **Vu-Topper RM**

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

_____ is the simplest form for representing a signed number

A. None of the given

B. Sign Magnitude Form **Page 304**

C. Biased Representation

D. Diminished Radix Compliment Form

Question No:26 **(Marks:1)** **Vu-Topper RM**

Each memory reference issued by the CPU is translated from the logical address space to _____.

A. Virtual Address

B. Cache Address

C. Physical Address **Page 328**

D. Effective Address

Question No:27 **(Marks:1)** **Vu-Topper RM**

When an I/O module has a capability of executing a specific set of instructions for specific I/O devices in the memory without the involvement of CPU is called _____.

A. I/O Channel **Page 291**

B. Cycle Stealing

C. I/O processors

D. Selector Channel

Question No:28 **(Marks:1)** **Vu-Topper RM**

_____refers to the fact when a given address has been referenced, the next address is highly probable to be accessed within a short period of time

A. Full Locality

B. Half Locality

C. Spatial Locality **Page 322**

D. Temporal Locality

Question No:29 **(Marks:1)** **Vu-Topper RM**

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

_____ depends upon the present position of the head and the position of the required sector.

A. Seek time **Page 293**

B. Throughput

C. Execution time

D. Direct memory Access

Question No:30 **(Marks:1)** **Vu-Topper RM**

The Memory Management unit (MMU) is located between _____ and _____.

A. ROM and RAM

B. The CPU and the physical memory **Page 328**

C. Main memory and secondary memory

D. Secondary memory and Virtual memory

Question No:31 **(Marks:1)** **Vu-Topper RM**

_____ is non volatile i-e it retains the information in it when power is removed from it

A. ROM **Page 230**

B. RAM

C. Cache

D. Hard disc

Question No:32 **(Marks:1)** **Vu-Topper RM**

Along with the information bits, we add up another bit, which is called?

A. Start bit

B. Stop bit

C. Parity bit **Page 297**

D. Header bit

Question No:33 **(Marks:1)** **Vu-Topper RM**

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Vu Topper RM

_____chips have quartz windows and by applying ultraviolet light data can be erased from them.

A. PROM
B. EPROM **Page 321**
c. EEPROM
D. Flash Memory

Question No:34 **(Marks:1)** **Vu-Topper RM**

For write to complete in Write through, the CPU has to wait. This wait stateis called _____.

A. Write Stalls **Page 327**
B. Cache Miss
C. Write Buffer
D. Write Allocate

Question No:35 **(Marks:1)** **Vu-Topper RM**

CRC has ---------- overhead as compared to Hamming code.

A. Equal
B. Lesser **Page 298**
C. Greater
D. None of the given

Question No:36 **(Marks:1)** **Vu-Topper RM**

A component connected to the _____ and with which the master component can communicate during a particular bus cycle. Normally the CPU with its bus control logic is the master component.

A. System bus **Page 288**
B. Bus component
C. Slave component
D. Master component

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Question No:37 **(Marks:1)** **Vu-Topper RM**

The _____ can be determined from the number of platters and the number of tracks.

A. Latency
B. execution time
C. storage capacity **Page 293**
D. Speed of processing

Question No:38 **(Marks:1)** **Vu-Topper RM**

_____ is a combination of arithmetic, logic and shifter unit along with some multiplexers and control unit.

A. ALU **Page 313**
B. Flip Flop
C. Control Unit
D. Barrel Rotator

Question No:39 **(Marks:1)** **Vu-Topper RM**

---------- allows a peripheral to read and write memory without intervention by the CPU.

A. Polling
B. Programmed I/O
C. Interrupt driven I/O
D. Direct memory access(DMA) **Page 287**

Question No:40 **(Marks:1)** **Vu-Topper RM**

What should be the behavior of interrupts during critical sections?

A. Must remain Enable
B. Must remain Disable **Page 197**
C. Depends on current situation
D. Only important interrupts be enable.

Question No:41 **(Marks:1)** **Vu-Topper RM**

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

VuTopper RM

The Direct memory access (DMA) scheme results in direct link between _____ and _____,

A. Cache memory and Registers
B. the CPU and the physical memory
C. Secondary memory and Virtual memory
D. main memory and secondary memory **Page 331**

Question No:42 **(Marks:1)** **Vu-Topper RM**

The register file is a collection of _____bit wide registers used for data transfer between memory and the CPU .

A. 16
B. 64
C. 32 **Page 316**
D. 8

Question No:43 **(Marks:1)** **Vu-Topper RM**

Dirty bit is a status bit which is used to indicate whether _____.

A. The block is valid or not
B. The block is accessible or not
C. The block has been modified or not **Page 327**
D. The block has been accessed frequently or not

Question No:44 **(Marks:1)** **Vu-Topper RM**

In computers,floating-point representation uses _____to encode significand,exponent and their sign in a single word

A. Octal Number
B. Binary Numbers **Page 313**
C. Decimal Numbers
D. Hexa decimal Numbers

Question No:45 **(Marks:1)** **Vu-Topper RM**

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Shifting of the radix point towards left or right is called _____

A. Scaling **Page 302**

B. Shifting

C. Right Shift

D. Logical Shift

Question No:46 **(Marks:1)** **Vu-Topper RM**

_____ is said to occur when a 0 is received instead of a stop bit.

A. Parity Error

B. Block Error

C. Framing Error **Page 221**

D. Over-run Error

Question No:47 **(Marks:1)** **Vu-Topper RM**

_____ hazard occurs when attempting to access the same resource in different ways at the same time

A. Data

B. Branch

C. Structural **Page 198**

D. Instruction

Question No:48 **(Marks:1)** **Vu-Topper RM**

_____ controls the sequence of the flow of microinstructions.

A. Multiplexer

B. DMA Controller

C. Virtual Memory

D. Micro program controller **Page 208**

Question No:49 **(Marks:1)** **Vu-Topper RM**

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Vu Topper RM

The multiplexer_____ is used to decide which value is transferred to be written back to the register file.

A. MP2
B. MP3
C. MP4
D. MP5 **Page 195**

Question No:50 **(Marks:1)** **Vu-Topper RM**

Pipeline hazard occurs when an instruction depends on the result of _____ instruction that is not yet complete.

A. First
B. Next
C. Previous **Page 198**
D. Ongoing

Question No:51 **(Marks:1)** **Vu-Topper RM**

Connection to a CPU that provides a data path between the CPU and external devices, such as a keyboard, display, or reader is called----------

A. I/O port
B. Buffer
C. Processor
D. Memory mapping

Question No:52 **(Marks:1)** **Vu-Topper RM**

Why DMA is faster than Programmer I/O technique because?

A. DMA uses buffers with CPU
B. DMA uses interrupted driven I/O
C. DMA transfers data directly using CPU.
D. DMA transfers data directly without using CPU **Google**

Question No:53 **(Marks:1)** **Vu-Topper RM**

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Vu Topper RM

_____ signal is used in printer with DB-25 interface to reset its controller.

A. #PE
B. #INIT
C. #SLCT
D. #STROB

Question No:54 **(Marks:1)** **Vu-Topper RM**

How can you define an interrupt?

A. A process where input devices can takeover the working of the microprocessor
B. A process where memory can speed up programs execution speed
C. A process where an external device can speedup the working of the microprocessor
D. A process where an external device can get the attention of the microprocessor

Question No:55 **(Marks:1)** **Vu-Topper RM**

Below given RTL description belongs to which stage of pipe-lining?
IR2 ← M [PC];
PC2 ← PC+4;

A. Memory Access
B. Instruction Fetch
C. ALU Operation
D. Instruction Decode

Question No:56 **(Marks:1)** **Vu-Topper RM**

Identify the following type of serial communication error condition:
"The prior character that was received was not still read by the CPU and is over written by a new received character."

A. Parity error

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Vu Topper RM

B. Framing error
C. Overrun error **Page 240**
D. Under-run error

Question No:57 **(Marks:1)** **Vu-Topper RM**
Super-scalar processor divides the instructions into _____ classes.
A. 4
B. 3
C. 2
D. 5

Question No:58 **(Marks:1)** **Vu-Topper RM**
The _____ instruction is completed once memory access has been made and the memory location has been written to.
A. Store **Page 192**
B. Link
C. Branch
D. Control

Question No:59 **(Marks:1)** **Vu-Topper RM**
_____ is a technique in which some of the CPU's address lines forming an input to the address decoder are ignored.
A. Pipelining
B. Partial decoding **Page 235**
C. Microprogramming
D. Instruction pre-fetching

Question No:60 **(Marks:1)** **Vu-Topper RM**
_____ form the control signal field in the micro instruction.
A. A bits
B. B bits
C. C bits **Page 206**
D. D bits

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Question No:61 **(Marks:1)** **Vu-Topper RM**

A combination of parallel and sequential hardware used to build a multiplier is known as _____

A. Booth Recording
B. Parallel Array Multiplier
C. Series Parallel Multiplier **Page 379**
D. None of the these

Question No:62 **(Marks:1)** **Vu-Topper RM**

The cache contains a copy of portions of the _____.

A. ROM
B. EPROM
C. Flash Memory
D. Main memory **Page 321**

Question No:63 **(Marks:1)** **Vu-Topper RM**

When _____ signal is high, this would correspond to a read operation equivalent to having an input data to the CPU and output from the memory.

A. R/W **Page 316**
B. REQUEST
C. COMPLETE
D. None of the given

Question No:64 **(Marks:1)** **Vu-Topper RM**

Every interrupt handler has an interrupt return (IRET) instruction, this instruction is an example of _____ return.

A. FAR
B. NEAR
C. SHORT
D. RELATIVE

Vu Topper RM

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Question No:65 **(Marks:1)** **Vu-Topper RM**

In which one of the following methods, does the CPU poll to identify the interrupting module and branches to an interrupt service routine on detecting an interrupt?

A. Daisy chain
B. Software poll
C. Multiple interrupt lines
D. All of given option

Question No:66 **(Marks:1)** **Vu-Topper RM**

_____ are computed by the ALU and stored in processor status register.

A. Condition codes **Page 311**
B. Fraction Division
C. Conditional Branches
D. None of the given

Question No:67 **(Marks:1)** **Vu-Topper RM**

Raid Level ____ is not a true member of the RAID family.

A. 0 **Page 365**
B. 1
C. 2
D. 3

Question No:68 **(Marks:1)** **Vu-Topper RM**

A very large page size results in increased_____.

A. Delay
B. Through put
C. Access time **Page 330**
D. Execution time

Question No:69 **(Marks:1)** **Vu-Topper RM**

Every time you press a key, an interrupt is generated.

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Vu Topper RM

A. Software interrupt
B. Hardware interrupt **Page 275**
C. None of the given
D. All of the given

Question No:70 **(Marks:1)** **Vu-Topper RM**
What is the status of the ACKNLG# signal when a character is completely received by the printer?
A. It toggles its state
B. It remains unaffected
C. It goes from low to high
D. It goes from high to low **Page 239**

Question No:71 **(Marks:1)** **Vu-Topper RM**
A _____signal decides whether the input word should be shifted or bypassed.
A. Shift/bypass **Page 384**
B. Control Read
C. Control Write
D. None of the given

Question No:72 **(Marks:1)** **Vu-Topper RM**
In virtual memory mechanism, pages are formulated in the _____ memory and brought into the _____ memory.
A. Main, cache
B. Main, secondary
C. Secondary, main **Page 328**
D. Secondary, cache

Question No:73 **(Marks:1)** **Vu-Topper RM**
Along with information bits we add up another bit which is called the_____bit.
A. CRC

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

B. Parity **Page 328**
C. Hamming
D. Error Detection

Question No:74 **(Marks:1)** **Vu-Topper RM**
Select the parts of a hard disk.
A. Header only
B. Data section only
C. Data section and a trailer
D. Header, data section and a trailer

Question No:75 **(Marks:1)** **Vu-Topper RM**
If a character is not available at the beginning of an interval, an _____ is said to occur.
A. Parity Error
B. Framing Error
C. Overrun Error
D. Under-run Error **Page 262**

Question No:76 **(Marks:1)** **Vu-Topper RM**
In which technique does the hardware directly access host memory for reading or writing independent of CPU?
A. Polling
B. Programmed I/O
C. Interrupt driven I/O
D. Direct Memory Access (DMA)

Question No:77 **(Marks:1)** **Vu-Topper RM**
Most parallel I/O ports used with peripheral devices are mapped on a range of_____.
A. Cache
B. Bus addresses
C. Contiguous addresses **Page 287**

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

D. Direct memory access

Question No:78 **(Marks:1)** **Vu-Topper RM**

How does DMA saves CPU time?

A. By periodically polling
B. By issuing a interrupt request to the CPU to request attention
C. By storing all data in a buffer to be later transferred to the CPU
D. By controlling transfer between I/O devices and memory directly

Question No:79 **(Marks:1)** **Vu-Topper RM**

_____ form the branch control field in the micro instruction.

A. A bits
B. B bits **Page 206**
C. M bits
D. D bits

Question No:80 **(Marks:1)** **Vu-Topper RM**

A parallel port can be considered to be a big _____ gate.

A. OR
B. AND
C. NOR
D. NOT

Question No:81 **(Marks:1)** **Vu-Topper RM**

_____ lets the user execute the program, one instruction at a time.

A. Execute
B. List File
C. Change PC
D. Single Step **Page 7**

Question No:82 **(Marks:1)** **Vu-Topper RM**

For input ports, the incoming data should be placed on

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Vu Topper RM

the data bus only during the I/O read bus cycle. For this purpose, _____ are used.

A. Flip Flops
B. Registers
C. AND Gates
D. Tri-state Buffers

Question No:83 **(Marks:1)** **Vu-Topper RM**

At the start of the transfer operation in synchronous communication, the master activates the _____ signal.

A. Data
B. Read
C. Enable
D. Acknowledge

Question No:84 **(Marks:1)** **Vu-Topper RM**

The directive _____ is used to define variables.

A. .db
B. .exe
C. .org
D. .equ

Question No:85 **(Marks:1)** **Vu-Topper RM**

---------- is the time needed by the CPU to recognize (not service) an interrupt request.

A. Throughput
B. Timer delay
C. Interrupt Latency **Page 256**
D. Response Deadline

Question No:86 **(Marks:1)** **Vu-Topper RM**

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

_____hazard occurs when an instruction attempts to access some data value that has not yet been updated by the previous instruction.

A. Data **Page 198**

B. Branch

C. Structural

D. Instruction

Question No:87 **(Marks:1)** **Vu-Topper RM**

In _____, a separate address space of the CPU is reserved for I/O operations.

A. All of above

B. Isolated I/O **Page 217**

C. None of above

D. Memory Mapped I/O

Question No:88 **(Marks:1)** **Vu-Topper RM**

The Pentium does allow the use of some part of its _____ accumulator register EAX

A. 8 bits

B. 16 bits

C. 32 bits **Page 230**

D. 64 bits

Question No:89 **(Marks:1)** **Vu-Topper RM**

A collection of ----------is called a micro program.

A. DMA

B. Registers

C. Microinstructions **Page 205**

D. large scale operations

Question No:90 **(Marks:1)** **Vu-Topper RM**

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Vu Topper RM

_____ is an electrical pathway through which the processor communicates with the internal and external devices attached to the computer.

A. DISK
B. Hazard
C. Memory
D. Computer Bus

Question No:91 **(Marks:1)** **Vu-Topper RM**

Where does the processor store the address of the first instruction of the ISR?

A. Interrupt handler
B. Interrupt request
C. Interrupt vector **Page 277**
D. All of the given options

Question No:92 **(Marks:1)** **Vu-Topper RM**

_____ signal has input direction with respect to printer

A. PE#
B. BUSY
C. ACKNLG#
D. STROBE#

Question No:93 **(Marks:1)** **Vu-Topper RM**

Identify the following type of serial communication error condition in which no character is available at the beginning of an interval.

A. Parity error
B. Overrun error
C. Framing error
D. Under-run error **Page 240**

Question No:94 **(Marks:1)** **Vu-Topper RM**

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Vu Topper RM

_____ form the branch address field in the micro instruction.

A. A bits
B. B bits
C. M bits **Page 206**
D. D bits

Question No:95 **(Marks:1)** **Vu-Topper RM**

_____ is/are example(s) of synchronous communication.

A. All of the given
B. Register to Memory
C. Memory to Memory
D. Register to Register

Question No:96 **(Marks:1)** **Vu-Topper RM**

ET = _____.

A. CPI x IC/T
B. CPI / IC x T
C. CP x IC x T
D. CPI x IC x T **Page 118**

Question No:97 **(Marks:1)** **Vu-Topper RM**

To set the value of micro-PC from external address, the value of 4 to 1 multiplexer is _____.

A. 00
B. 01
C. 10
D. 11

Question No:98 **(Marks:1)** **Vu-Topper RM**

Tri-state buffers are used for removing _____.

A. bus collision
B. bus contention
C. Instruction collision

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Vu Topper RM

D. Instruction contention

Question No:99 (Marks:1) Vu-Topper RM

Which of the following pins of processor is designated for maskable interrupts?

A. MI
B. NMI
C. RINT
D. INTR

Question No:100 (Marks:1) Vu-Topper RM

Which one of the following is NOT a technique used when the CPU wants to exchange data with a peripheral device?

A. Virtual Memory Page 268
B. Programmed I/O
C. Interrupt driven I/O
D. Direct Memory Access (DMA)

Question No:101 (Marks:1) Vu-Topper RM

Which is the last instruction of the ISR that is to be executed when the ISR terminates?

A. INT
B. IRQ
C. NMI
D. IRET Page 255

Question No:102 (Marks:1) Vu-Topper RM

In the little-endian format exchanging data between computers, the data transmitted by one will be received in a “swapped” form by the other.

A. Signals
B. Swapped Google
C. Arranged
D. Organized

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What’s app 03224021365

Vu Topper RM

Question No:103 **(Marks:1)** **Vu-Topper RM**

Identify the type of serial communication error condition in which "0" is received instead of a stop bit (which is always a "1")?

A. Parity error
B. Overrun error
C. Framing error **Page 240**
D. Under-run error

Question No:104 **(Marks:1)** **Vu-Topper RM**

_____ means that the CPU should input data from an input device only when the device is ready to provide data and send data to an output device only when it is ready to receive data.

A. Data transfer
B. Data location
C. Data synchronization **Page 218**
D. Asynchronous transmission

Question No:105 **(Marks:1)** **Vu-Topper RM**

The third stage of the Pipelined version of SRC is;

A. Register write
B. ALU operation **Page 190**
C. Memory access
D. Instruction Fetch

Question No:106 **(Marks:1)** **Vu-Topper RM**

A _____ processor is based on a very long instruction word.

A. SRC
B. VLIW **Page 202**
C. FALCON-E
D. FALCON-A

Question No:107 **(Marks:1)** **Vu-Topper RM**

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

In which one of the following methods for resolving the priority, the device with the highest priority is placed in the first position, followed by lower-priority devices up to the device with the lowest priority, which is placed last in the series?

A. Parallel
B. Asynchronous
C. Semi-synchronous
D. Daisy-Chaining Priority

Question No:108 (Marks:1) Vu-Topper RM

_____ signal has Output direction with respect to printer

A. INIT#
B. D<7..0>
C. STROBE#
D. ACKNLG#

Question No:109 (Marks:1) Vu-Topper RM

Interrupt driven I/O is better than _____.

A. Stall
B. Polling Page 259
C. First In First Out
D. Data Forwarding

Question No:110 (Marks:1) Vu-Topper RM

From an n bit control word we may have _____ bit signal values.

A. Nxn
B. n^2
C. 2^n Page 210
D. 2xn

Question No:111 (Marks:1) Vu-Topper RM

The source file of FALSIM should contain _____ text only.

A. UFT

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Vu Topper RM

B. ANSI
C. ASCII **Google**
D. Unicode

Question No:112 **(Marks:1)** **Vu-Topper RM**
_____ usually involves calculating the target address and evaluating a condition.
A. Pipelined SRC
B. ALU instructions
C. Branch Instructions **Page 193**
D. Load/Store instructions

Question No:113 **(Marks:1)** **Vu-Topper RM**
The SRC uses a hazard detection unit. The hazard can be resolved using either pipeline stalls or by _____.
A. Data forwarding **Page 199**
B. Data compressing
C. Instruction handling
D. Instruction forwarding

Question No:114 **(Marks:1)** **Vu-Topper RM**
Connection to a CPU that provides a data path between the CPU and external devices, such as a keyboard, display, or reader is called----------
A. Buses
B. Program
C. Processor
D. Memory address

Question No:115 **(Marks:1)** **Vu-Topper RM**
Which temporary register is loaded with either a register value from the register file or a constant from the instruction?
A. Z4
B. X3

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

VuTopperRM

C. Y3 **Page 191**
D. Z5

Question No:116 **(Marks:1)** **Vu-Topper RM**
Which one of the following methods for resolving the priority makes use of individual bits of a priority encoder?
A. Parallel Priority
B. Asynchronous Priority
C. Daisy-Chaining Priority
D. Semi-synchronous Priority

Question No:117 **(Marks:1)** **Vu-Topper RM**
VLIW stands for _____.
A. Very Long Instruction Word
B. Very Long Instruction Width
C. Variable Length Instruction Width
D. Variable Length Instruction Word **Page 202**

Question No:118 **(Marks:1)** **Vu-Topper RM**
Which of the following is not True regarding serial communication?
A. Slow
B. High cost
C. Inefficient
D. Easy to implement.

Question No:119 **(Marks:1)** **Vu-Topper RM**
In a printer with DB-25 interface, _____ signal is is better for edge triggered systems.
A. PE#
B. BUSY#
C. STROB#
D. ACKNLG# **Page 242**

Vu Topper RM

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Question No:120 **(Marks:1)** **Vu-Topper RM**

Which of the followings is not an example of super-scalar processors?

A. Intel P6

B. IAPX88

C. PowerPC 601

D. DEC Alpha 21164

Question No:121 **(Marks:1)** **Vu-Topper RM**

A software routine performed when an interrupt is received by the computer is called as ---------

A. Trap

B. Interrupt

C. Exception

D. Interrupt handler

Question No:122 **(Marks:1)** **Vu-Topper RM**

An interface that can be used to connect the microcomputer bus to _____is called an I/O Port.

A. Memory

B. Flip Flops

C. Multiplexers

D. Peripheral devices **Page 216**

Vu Topper RM

Visit My YouTube Channel
For Subjective and More

Important Files
Channel Name = #VuTopperRM

Vu Topper RM

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365