

MULTI-SWITCHES & AMPLIFIERS

Up to 4 SAT positions



MULTISWITCH SERIES – SDC

The GSS SDC multiswitch series is built for distributing satellite signals and terrestrial DVB services to multiple user points in professional installations.

Available in four different variants, the system distributes IF signals from 5, 9, 13 or 17 inputs and up to 32 outputs. Depending on the variant, it supports Quattro and Quad (Quattro-Switch) LNBs.

Each unit integrates automatic gain control for satellite and adjustable amplification for terrestrial inputs. High isolation and low insertion loss ensure signal quality across large cascades.

All models feature standby-efficient power supplies, built-in 22kHz generators, LED status indicators, and grounding clamps for safe installation.

MAIN FEATURES

- German Design
- Gain adjustment for each input
- Voltage Led Indicators
- High Insulation compact plug and play
- High performance and special power supply
- External TERR Input

MULTISWITCHES

SDC MULTISWITCH 5-SERIES TRANSPOSED

Type	SDC 508	SDC 516	SDC 524	SDC 532
SAT Inputs	4	4	4	4
Terr. Inputs	1	1	1	1
Subscriber Outputs	8	16	24	32
SAT Frequency	950-2150 MHz	950-2150 MHz	950-2150 MHz	950-2150 MHz
Terr. Frequency	47-870 MHz	47-870 MHz	47-870 MHz	47-870 MHz
SAT Gain	23–25 dB	23–25 dB	23–25 dB	23–25 dB
Terr. Gain	+3 dB ±1	+3 dB ±1	+3 dB ±1	+2 dB ±1
Equalizer	-1 dB ±1	-3 dB ±1	+1 dB ±1	-8 dB ±1
Cascade Loss SAT	+4 dB ±1	+4 dB ±1	+4 dB ±1	+4 dB ±1
Cascade Loss Terr.	-2 dB ±1	-3 dB ±1		-5 dB ±1
Max SAT Input	98 dBμV	98 dBμV	98 dBμV	98 dBμV
Max Terr. Input	81 dBμV	81 dBμV	81 dBμV	81 dBμV
Max SAT Output	102 dBμV	102 dBμV	102 dBμV	102 dBμV
Max Terr. Output	85 dBμV	85 dBμV	85 dBμV	85 dBμV
Return Loss SAT	>33 dB	>33 dB	>33 dB	>33 dB
Return Loss Terr.	>37 dB	>37 dB	>37 dB	>37 dB
LNB Type	Quad&Quattro	Quad&Quattro	Quad&Quattro	Quad&Quattro
Subscriber Current	48 mA	48 mA	48 mA	48 mA
System Current	130 mA	130 mA	130 mA	260 mA
Total Current	630 mA	630 mA	630 mA	760 mA
Temperature	-15 to +40 °C	-15 to +40 °C	-15 to +40 °C	-15 to +40 °C
Dimensions	135x135x45 mm	135x190x45 mm	135x275x45 mm	135x320x45 mm
Weight	346 g	465 g	625 g	723 g
Accessories	SDP 1830			
Power Supply (Optional)	Power supply, In: 230V, Out: 18V 2.5A			

MULTISWITCHES

SDC MULTISWITCH 9-SERIES TRANSPOSED

Type	SDC 908	SDC 912	SDC 916	SDC 924	SDC 932
SAT Inputs	8	8	8	8	8
Terr. Inputs	1	1	1	1	1
Subscriber Outputs	8	12	16	24	32
SAT Frequency	950-2150 MHz	950-2150 MHz	950-2150 MHz	950-2150 MHz	950-2150 MHz
Terr. Frequency	47-870 MHz	47-870 MHz	47-870 MHz	47-870 MHz	47-870 MHz
SAT Gain	23-25 dB	23-25 dB	23-25 dB	23-25 dB	23-25 dB
Terr. Gain	+3 dB $\pm$ 1	+3 dB $\pm$ 1	+3 dB $\pm$ 1	+3 dB $\pm$ 1	+2 dB $\pm$ 1
Equalizer	-1 dB $\pm$ 1	+1 dB $\pm$ 1	+1 dB $\pm$ 1	+1 dB $\pm$ 1	-8 dB $\pm$ 1
Cascade Loss SAT	+4 dB $\pm$ 1	+4 dB $\pm$ 1	+4 dB $\pm$ 1	+4 dB $\pm$ 1	+4 dB $\pm$ 1
Cascade Loss Terr.	-2 dB $\pm$ 1				-5 dB $\pm$ 1
Max SAT Input	98 dB μ V	98 dB μ V	98 dB μ V	98 dB μ V	98 dB μ V
Max Terr. Input	81 dB μ V	81 dB μ V	81 dB μ V	81 dB μ V	81 dB μ V
Max SAT Output	102 dB μ V	102 dB μ V	102 dB μ V	102 dB μ V	102 dB μ V
Max Terr. Output	85 dB μ V	85 dB μ V	85 dB μ V	85 dB μ V	85 dB μ V
Return Loss SAT	>33 dB	>33 dB	>33 dB	>33 dB	>33 dB
Return Loss Terr.	>37 dB	>37 dB	>37 dB	>37 dB	>37 dB
LNB Type	Quattro	Quattro	Quattro	Quattro	Quattro
Subscriber Current	48 mA	48 mA	48 mA	48 mA	48 mA
System Current	130 mA	130 mA	130 mA	130 mA	260 mA
Total Current	630 mA	630 mA	630 mA	630 mA	760 mA
Temperature	-15 to +40 °C	-15 to +40 °C	-15 to +40 °C	-15 to +40 °C	-15 to +40 °C
Dimensions	200x135x45 mm	200x160x45 mm	200x190x45 mm	200x275x45 mm	200x320x45 mm
Weight	520 g	645 g	770 g	1120 g	1370 g
Accessories	SDP 1830				
Power Supply (Optional)	Power supply, In: 230V, Out: 18V 2.5A				

MULTISWITCHES

SDC MULTISWITCH 13-SERIES TRANSPOSED

Type	SDC 1308	SDC 1312	SDC 1316	SDC 1324	SDC 1332
SAT Inputs	12	12	12	12	12
Terr. Inputs	1	1	1	1	1
Subscriber Outputs	8	12	16	24	32
SAT Frequency	950-2150 MHz	950-2150 MHz	950-2150 MHz	950-2150 MHz	950-2150 MHz
Terr. Frequency	47-870 MHz	47-870 MHz	47-870 MHz	47-870 MHz	47-870 MHz
SAT Gain	23-25 dB	23-25 dB	23-25 dB	23-25 dB	23-25 dB
Terr. Gain	+3 dB $\pm$ 1	+2 dB $\pm$ 1	+2 dB $\pm$ 1	+1 dB $\pm$ 1	+1 dB $\pm$ 1
Equalizer	-1 dB $\pm$ 1	-2 dB $\pm$ 1	-3 dB $\pm$ 1	-6 dB $\pm$ 1	-8 dB $\pm$ 1
Cascade Loss SAT	+4 dB $\pm$ 1	+4 dB $\pm$ 1	+4 dB $\pm$ 1	+4 dB $\pm$ 1	+4 dB $\pm$ 1
Cascade Loss Terr.	-2 dB $\pm$ 1	-2 dB $\pm$ 1	-3 dB $\pm$ 1	-4 dB $\pm$ 1	-5 dB $\pm$ 1
Max SAT Input	98 dB μ V	98 dB μ V	98 dB μ V	98 dB μ V	98 dB μ V
Max Terr. Input	81 dB μ V	81 dB μ V	81 dB μ V	81 dB μ V	81 dB μ V
Max SAT Output	102 dB μ V	102 dB μ V	102 dB μ V	102 dB μ V	102 dB μ V
Max Terr. Output	85 dB μ V	85 dB μ V	85 dB μ V	85 dB μ V	85 dB μ V
Return Loss SAT	>33 dB	>33 dB	>33 dB	>33 dB	>33 dB
Return Loss Terr.	>37 dB	>37 dB	>37 dB	>37 dB	>37 dB
LNB Type	Quattro	Quattro	Quattro	Quattro	Quattro
Subscriber Current	41 mA	41 mA	41 mA	41 mA	41 mA
System Current	150 mA	150 mA	150 mA	280 mA	280 mA
Total Current	810 mA	810 mA	810 mA	940 mA	940 mA
Temperature	-15 to +40 °C	-15 to +40 °C	-15 to +40 °C	-15 to +40 °C	-15 to +40 °C
Dimensions	280x135x45 mm	280x160x45 mm	280x190x45 mm	280x275x45 mm	320x280x45 mm
Weight	628 g	750 g	871 g	1168 g	1354 g
Accessories	SDP 1830				
Power Supply (Optional)	Power supply, In: 230V, Out: 18V 2.5A				

MULTISWITCHES

SDC MULTISWITCH 17-SERIES TRANSPOSED

Type	SDC 1708	SDC 1712	SDC 1716	SDC 1724	SDC 1732
SAT Inputs	16	16	16	16	16
Terr. Inputs	1	1	1	1	1
Subscriber Outputs	8	12	16	24	32
SAT Frequency	950-2150 MHz	950-2150 MHz	950-2150 MHz	950-2150 MHz	950-2150 MHz
Terr. Frequency	47-870 MHz	47-870 MHz	47-870 MHz	47-870 MHz	47-870 MHz
SAT Gain	23-25 dB	23-25 dB	23-25 dB	23-25 dB	23-25 dB
Terr. Gain	+3 dB $\pm$ 1	+2 dB $\pm$ 1	+2 dB $\pm$ 1	+1 dB $\pm$ 1	+2 dB $\pm$ 1
Equalizer	-1 dB $\pm$ 1	-2 dB $\pm$ 1	-3 dB $\pm$ 1	-6 dB $\pm$ 1	-10 dB $\pm$ 1
Cascade Loss SAT	+4 dB $\pm$ 1	+4 dB $\pm$ 1	+4 dB $\pm$ 1	+4 dB $\pm$ 1	+4 dB $\pm$ 1
Cascade Loss Terr.	-2 dB $\pm$ 1	-2 dB $\pm$ 1	-3 dB $\pm$ 1	-4 dB $\pm$ 1	
Max SAT Input	98 dB μ V	98 dB μ V	98 dB μ V	98 dB μ V	98 dB μ V
Max Terr. Input	81 dB μ V	81 dB μ V	81 dB μ V	81 dB μ V	81 dB μ V
Max SAT Output	102 dB μ V	102 dB μ V	102 dB μ V	102 dB μ V	102 dB μ V
Max Terr. Output	85 dB μ V	85 dB μ V	85 dB μ V	85 dB μ V	85 dB μ V
Return Loss SAT	>33 dB	>33 dB	>33 dB	>33 dB	>33 dB
Return Loss Terr.	>37 dB	>37 dB	>37 dB	>37 dB	>37 dB
LNB Type	Quattro	Quattro	Quattro	Quattro	Quattro
Subscriber Current	41 mA	41 mA	41 mA	41 mA	41 mA
System Current	150 mA	150 mA	150 mA	280 mA	360 mA
Total Current	790 mA	790 mA	790 mA	920 mA	1020 mA
Temperature	-15 to +40 °C	-15 to +40 °C	-15 to +40 °C	-15 to +40 °C	-15 to +40 °C
Dimensions	320x135x45 mm	320x160x45 mm	320x190x45 mm	320x275x45 mm	320x275x90 mm
Weight	753 g	835 g	1032 g	1314 g	1837 g
Accessories	SDP 1830				
Power Supply (Optional)	Power supply, In: 230V, Out: 18V 2.5A				

AMPLIFIERS

SDA AMPLIFIER SPECIFICATIONS


The GSS SDA amplifier line (SDA 521, 921, 1321, 1721) delivers active amplification for SAT and terrestrial signals in systems with 5, 9, 13 or 17 inputs.

Designed for large-scale multiswitch setups, each unit features fixed gain per input path (20dB SAT / 25dB terrestrial), high output levels (up to 105dBμV), and low return loss.

Compact form factors and external 230V power supplies allow for easy wall or rack installation. These amplifiers maintain signal strength and quality over long distances or cascaded segments – ideal for professional and commercial-grade systems.

MAIN FEATURES

- German Design
- Cascade gain amplifier
- High output level
- Adjustable amplification
- LNB ON OFF switch
- High Isolation

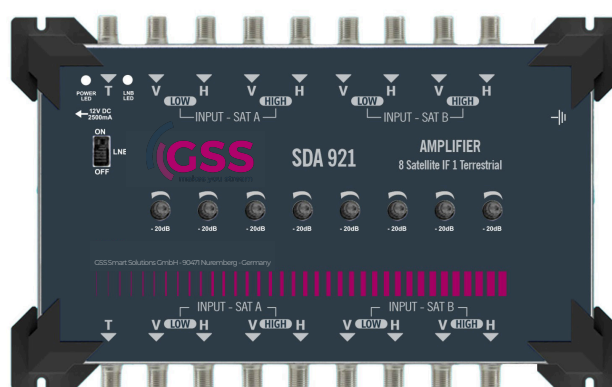

Type	SDA 521	SDA 921	SDA 1321	SDA 1721
SAT Inputs / Outputs	4	8	12	16
Terr. Inputs / Outputs	1	1	1	1
SAT Frequency	950-2150 MHz	950-2150 MHz	950-2150 MHz	950-2150 MHz
Terr. Frequency	47-862 MHz	47-862 MHz	47-862 MHz	47-862 MHz
SAT Gain	20±2 dB	20±2 dB	20±2 dB	20±2 dB
Terr. Gain	25±2 dB	25±2 dB	25±2 dB	25±2 dB
Max Output SAT	105 dBμV	105 dBμV	105 dBμV	105 dBμV
Max Output Terr.	100 dBμV	100 dBμV	100 dBμV	100 dBμV
Return Loss SAT	>10 dB	>10 dB	>10 dB	>10 dB
Return Loss Terr.	>10 dB	>10 dB	>10 dB	>10 dB
Power Supply	230 V AC	230 V AC	230 V AC	230 V AC
Power Consumption	3.5 W	4.0 W	5.0 W	6.0 W
Dimensions	130x110x53 mm	185x115x53 mm	185x135x53 mm	225x135x53 mm
Weight	340 g	490 g	600 g	725 g
Accessories	SDP 1230			
Power Supply (Optional)	Power supply, In: 230V, Out: 12V 2.5A			