

STREAM VISION 2x2 – PROFESSIONAL QUAD-VIEW MONITORING SOLUTION

Simultaneous display of up to four video streams with advanced overlays

PRODUCT DESCRIPTION

Stream Vision 2x2 is a professional quad-view display solution for simultaneous monitoring and display of up to four video streams. The system combines live sources in a clearly structured view and enhances them with precise overlay functions such as timer, ticker, and clock.

FEATURES

- **Quad-view monitoring**
for up to four parallel video streams
- **Advanced overlay functions**
Count-up/down, alarm, ticker, clock
- **Full control**
Comprehensive control via API commands/media management.
Event tracking via webhooks.
- **Web-based configuration**
for easy customization
- **Supports monitoring scenarios**
in security, broadcast, corporate, and event environments
- **Flexible display options**
for optimizing workflows and information flow

APPLICATION



Security & Surveillance

Monitor multiple camera feeds in control centers, SOC's, or critical infrastructures. Time-based overlays support logging, shift changes, and control processes.



Broadcast & TV productions

Monitoring of multiple live sources for news, sports, and studio productions. Timers and tickers support broadcast processes, on-air coordination, and editorial notes.



Corporate & Training

Deployed in conference and training environments for presentations, agenda notes, and time management. Supports internal communication and hybrid meeting scenarios.



Live events & event technology

Fast setup for conferences, hybrid events, and stage productions. Countdowns, tickers, and visual overlays are used for process control and audience information.


STREAM VISION 2x2 | STAND 2026-01

STREAM VISION 2x2



FUNCTION OVERVIEW

Stream Vision 2x2 - Dashboard View

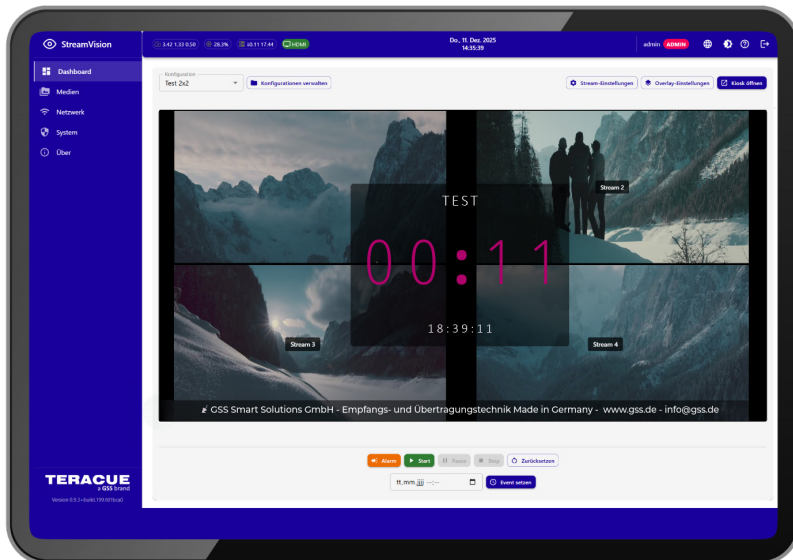

INPUT	
IP	SPTS (UDP/RTP) HLS (HTTP/S) RTSP
Medioplayer	.ts-files
PROCESSING	
Display layouts	Single, Dual Horizontal, Dual Vertical, Quad
OSD	Time Count-up/down (including timer) Label per input Alarm Ticker
OUTPUT	
AV-Interface	HDMI 2.0a
Resolution	4096x2160@60Hz
OTHER	
Network	1 x 1 GbE, 1 x 2.5 GbE
Control	Graphical User Interface API / Webhook
Design	Mini PC with VESA mount

STREAM VISION 2x2 | STAND 2026-01