


ARGO CARTON SEALER



ARGO CARTON SEALER

METHOD OF OPERATION

1. Operator breaks the light curtain and places loaded carton into the machine with the inner flaps closed
2. Once operator removes hands and a box is detected the machine will begin its cycle
3. A cylinder will advance the box forward where a Nordson hot melt glue system will apply glue to the folded flaps
4. The outer major flaps are then closed and box rides into a short compression area
5. Completed cartons are discharged out the backside of the machine

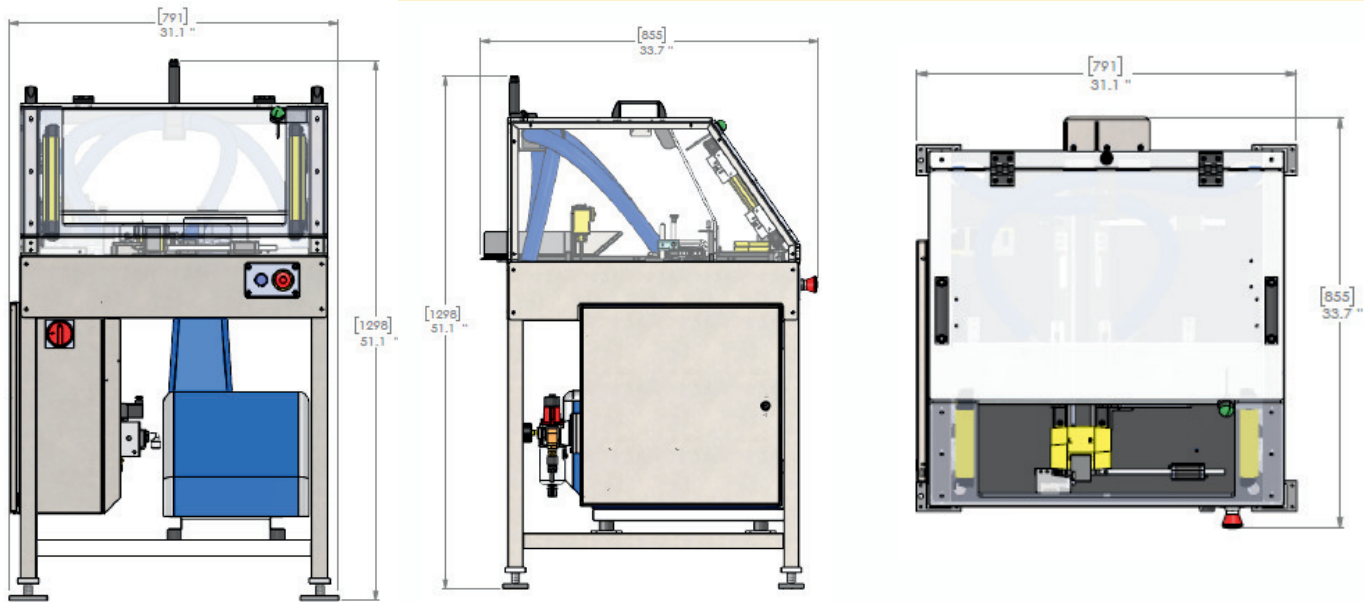

SPECIFICATIONS

Features

- Nordson Glue Tank
- Safety Light Curtain
- Quick Changeover
- Minimal Change Parts
- Compact Footprint
- Reduced Carton Size Range

Packing Materials

- Paperboard
- Corrugate

Speed

- Up to 30 Cartons per minute

Size Range

- Min: .75" x .75" x 1.25"
- Max: 4.5" x 2" x 6"

*Can be ordered outside the standard size range

Voltage & Controls

- 220 Volts 50/60 Hz, Single Phase

Air Consumption

- 60 PSI (4 bar)

Shipping

- Less than 360 lbs

*All Engineering Specifications and Designs are subject to change based on individual requirements