




REVERSE TRISEAL

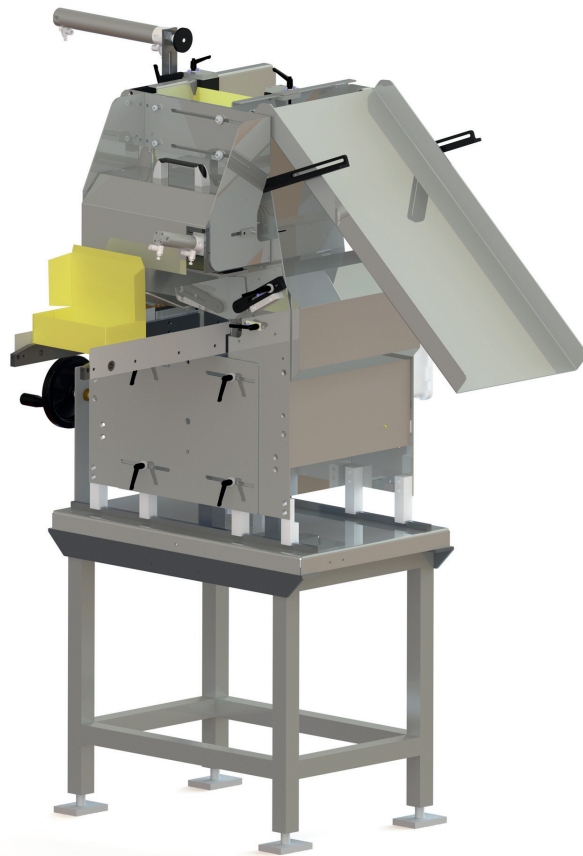

Reverse Triseal

METHOD OF OPERATION

1. The carton is presented with hinge cover leading into the sealing unit
2. The end flaps are sealed first, the carton is then elevated to a second station where the front flap is sealed

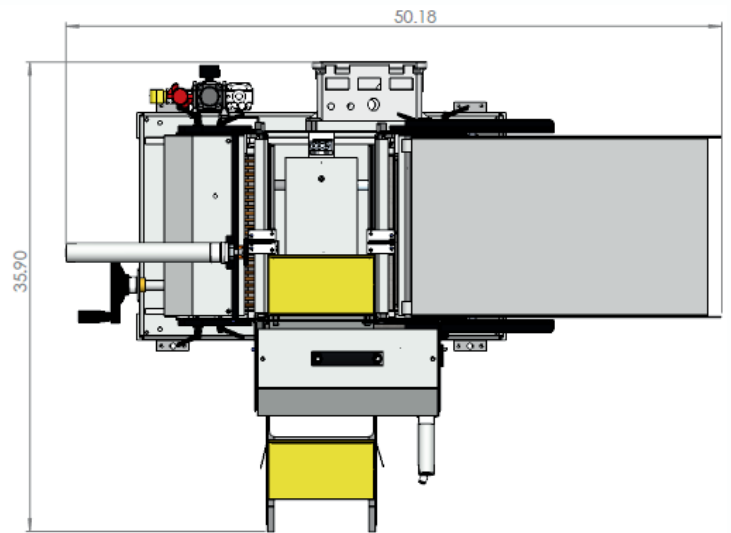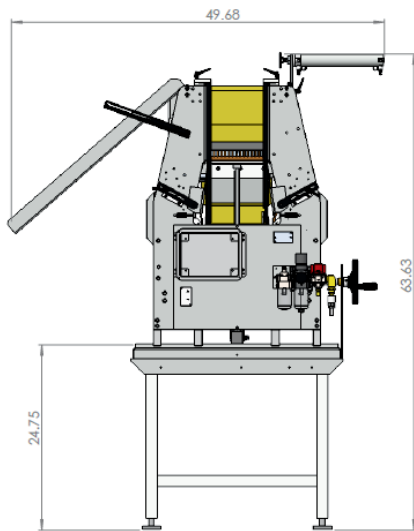

SPECIFICATIONS

Features

- Optional Automatic Loading
- Accepts all conventional style cartons
- Hooded cartons optional

Packing Materials

- Paperboard
- Corrugate

Speed

- Up to 30 Cartons per minute

Size Range

- Min: 3" x 3/4" x 3/4"
- Max: 12" x 12" x 4"

*Can be ordered outside the standard size range

Voltage & Controls

- 220 Volts 50/60 Hz, Single Phase
- 2100 Hot Melt System

Air Consumption

- 60 PSI (4 bar)

Shipping

- Less than 300 lbs (140 kg)

*All Engineering Specifications and Designs are subject to change based on individual requirements