

MKS-DLS32
IO Expander Boards
FOR/REV/PWM
Build-Brighton-CNC
v1.0 (02/05/2025)


NB: tab on the MKS board EXP connectors
is flipped 180 compared to tab on this board,
but pin number order is the same

IO to be patched on the MKS-DLC32:
gpio No. Net From To Notes
GPIO.0 SDA J2.3 EXP2.4 DFU Mode on reset
GPIO.4 SCL J2.4 EXP2.5

I2SO.7 has a 500mA OC/24V connector on the MKS
GPIO.32 has an 800mA OC/24V screw terminal on the MKS
These outputs do not have GND,
so cannot be use as switch outputs

Minimal changes to optoisolate VFD control outputs. Consider isolating AIR/MIST also.

Output Functions:
FOR
REV
PWM
FLOOD
MIST

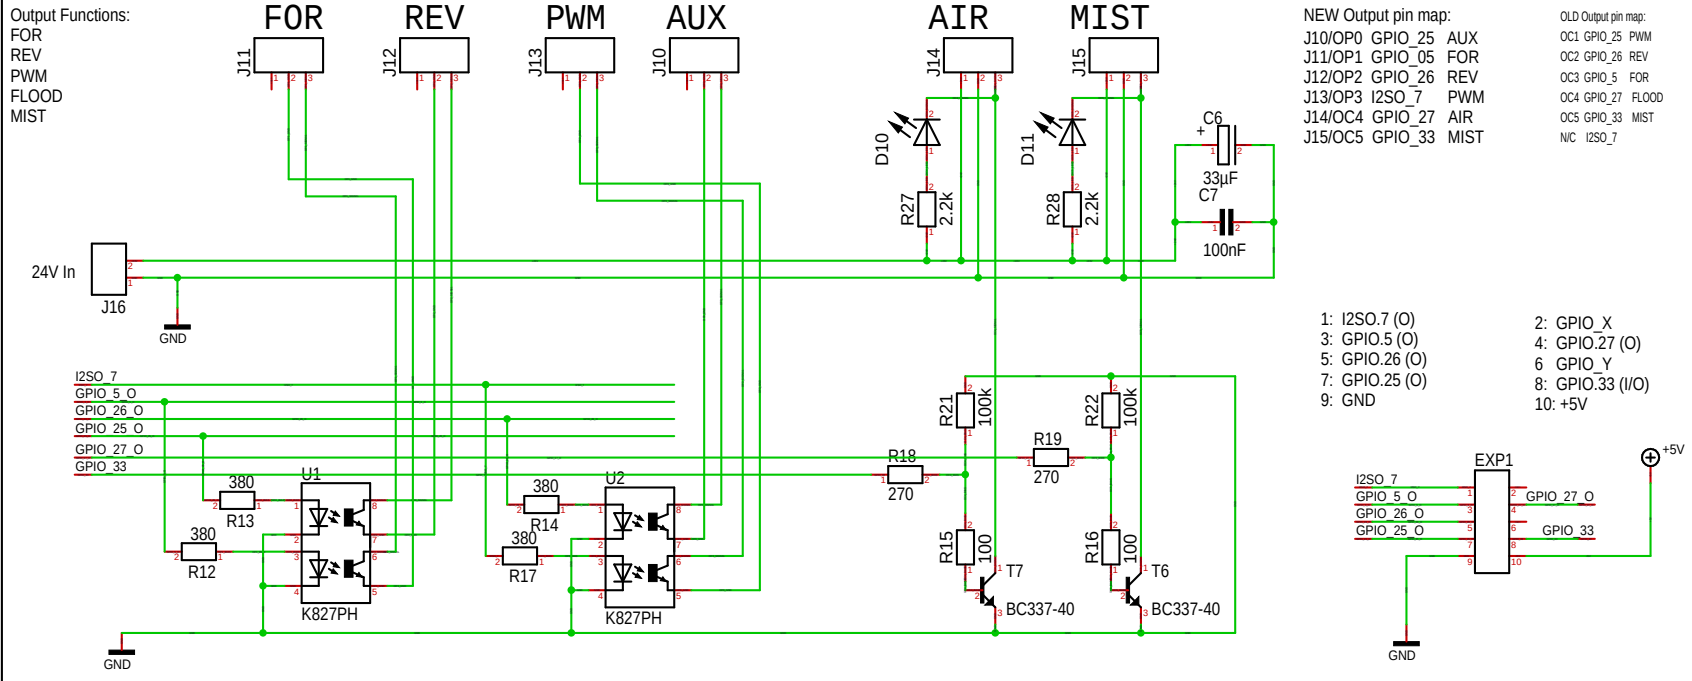

Input Functions:
START CYCLE
FEED HOLD
MACRO
RESET
PROBE*
SAFETY DOOR (TBD)

*PROBE to use GPIO.22,
J12 (Probe) on MKS board

