


- Specs:
 - Can handle between 2.7V and 5V powered through I2C

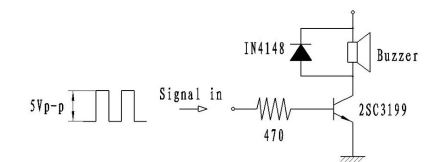

H1
MountingHole

H2
MountingHole

Rev: 0.8
Id: 1/1