


1. CONTRACTOR MUST VERIFY ALL CONTROLLING FIELD DIMENSIONS AND CONDITIONS BEFORE ORDERING OR FABRICATING ANY MATERIAL.
2. CONTRACTOR TO VERIFY IN THE FIELD THAT THE LOCATION OF POLE, CONCRETE COLUMN, AND UTILITIES DOES NOT CONFLICT WITH (E) BASEMENT WALL AND STRUCTURAL FRAMING BELOW. CONFIRMING LOCATION WITH CITY REPRESENTATIVE PRIOR TO CORING AND DRILLING IS REQUIRED BUT WILL NOT RELIEVE THE RESPONSIBILITY FROM CONTRACTOR TO LAYOUT THE POLE FOUNDATION LOCATION CORRECTLY PER PLAN AND FIELD CONDITIONS.
3. WHERE (E) SIDEWALK & SLAB ARE TO BE DEMOLISHED, CONTRACTOR SHALL PROTECT & RELOCATE (E) CONDUITS AND (E) PIPES AS REQUIRED AS PART OF THE INCIDENTAL WORK IF NOT SHOWN ON PLAN.
4. IF (E) CONDITIONS VARY WITHIN LIMITS OF WORK, IMMEDIATELY CONTACT THE CITY REPRESENTATIVE.
5. FOR ADDITIONAL INFORMATION NOT SHOWN, SEE ROADWAY PLANS.
6. HIGH GROUNDWATER LEVEL MAY BE PRESENT. DURING CONSTRUCTION, THE CONTRACTOR SHALL PROVIDE ALL NECESSARY PROTECTION OF BASEMENT STRUCTURE. THE CONTRACTOR SHALL BEAR ALL EXPENSE FOR REPAIR OR REPLACEMENT.
7. USE SMALL TOOLS AND CARE FOR DEMOLITION & PROTECT ADJACENT (E) BRICK ARCH ROOF.



REFERENCE INFORMATION
& FILE NO. OF SURVEYS

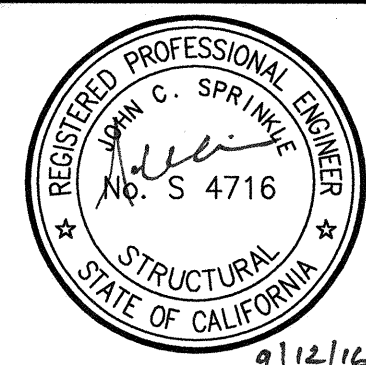

	Date:
	9/12/16
	9/20/16
	9/21/16

SCALE:
AS SHOWN
SHEET OF SHEETS

SCALE:
AS SHOWN
SHEET OF SHEETS

SUB-SIDEWALK BASEMENT
PARTIAL PLANS AT INTERSECTION
2ND STREET AND NATOMA STREET

SPECIFICATION NO.	1064J (R)
DRAWING NO.	S-202
FILE NO.	106,297
REV. NO.	