



10"–THICK CONCRETE PAVING (1)
SCALE: 3"=1'–0"

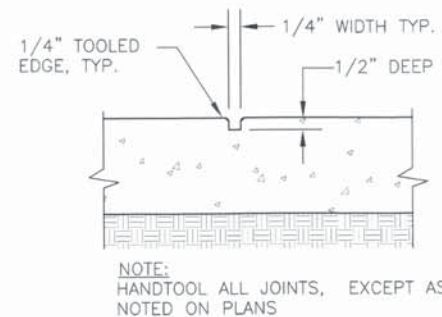


SCORE JOINT (2)
SCALE: 3"=1'–0"

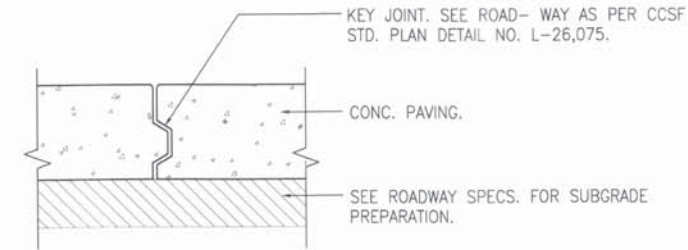


NOTE: LOCATE KEYED CONSTRUCTION JOINT
AS INDICATED ON PLANS AND BETWEEN ALL
SEPARATE POURS OF CONCRETE U.O.N.

KEYED CONSTRUCTION JOINT (3)
SCALE: 1"=1'–0"

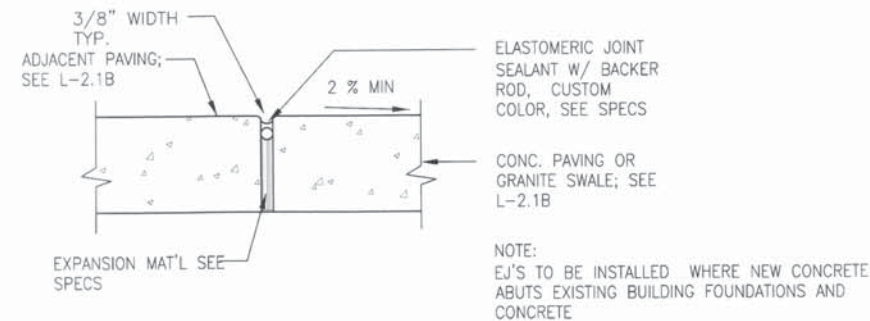


EXPANSION JOINT (4)
SCALE: 3"=1'–0"

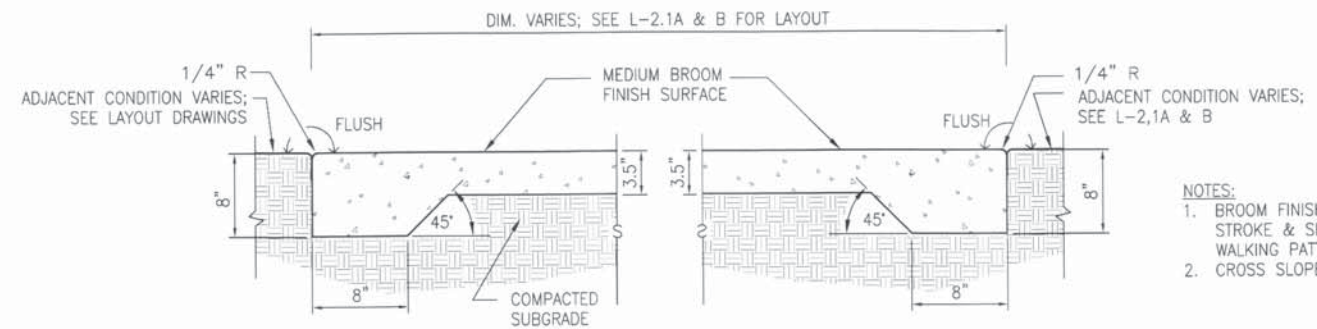

NOTES:
1. BROOM FINISH SHALL BE MEDIUM WEIGHT
STROKE & SHALL BE PERPENDICULAR TO
WALKING PATTERN.
2. CROSS SLOPE NOT TO EXCEED 2%.

3.5"–THICK CONCRETE PAVING (5)
N.T.S.

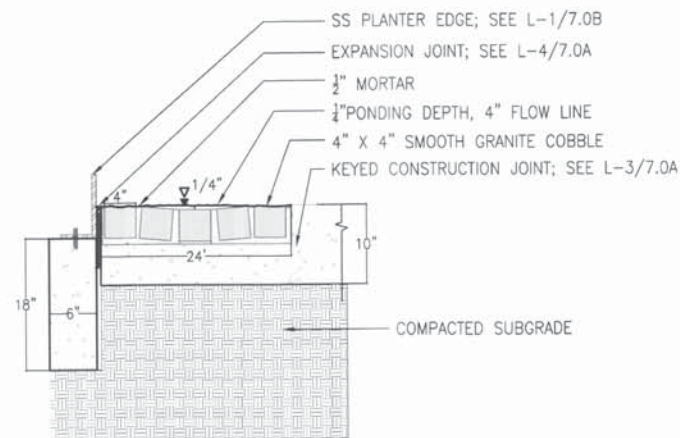

GRANITE COBBLE SWALE (6)
SCALE: NTS

NO.	DATE	DESCRIPTION	BY	APP.
TABLE OF REVISIONS				
THIS DRAWING WAS LAST MODIFIED: 03/30/18 14:22, BY: jbrooks				


REFERENCE INFORMATION
& FILE NO. OF SURVEYS



BUILDING DESIGN &
CONSTRUCTION
PUBLIC WORKS
CITY & COUNTY OF SAN FRANCISCO
30 VAN NESS AVENUE, 4TH FLOOR
SAN FRANCISCO, CA 94102 - 6028

Section Mgr. *[Signature]* 4/2/18
City Architect *[Signature]* 4/2/18

DESIGNED: DATE: 3/2018
JB/SP
DRAWN: DATE: 3/2018
JB/SP
CHECKED: DATE: 7/18
RW



SCALE:
AS NOTED
SHEET OF SHEETS

2ND STREET
IMPROVEMENTS PROJECT
NATOMA
LANDSCAPE CONSTRUCTION DETAILS

CONTRACT NO.
XXXX
DRAWING NO.
L-7.0A
FILE NO.
106,241.1
REV. NO.