
DAY – 5 HOME WI-FI NETWORK


1. **Open Cisco Packet Tracer and create a new project file named 'HomeWiFiNetwork.pkt' with three PCs and one wireless router connected appropriately.**

Ans:-

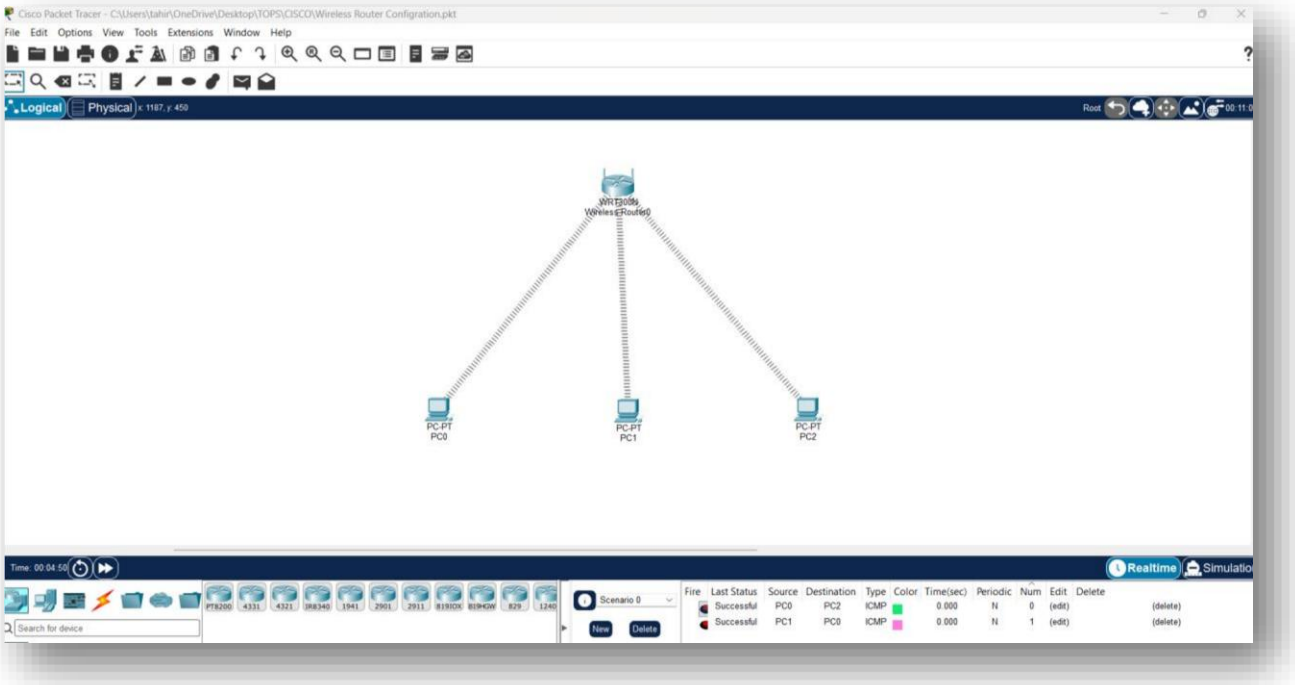


2. **Assign static IP addresses to each PC in your Packet Tracer network so they are on the same subnet (e.g., 192.168.10.x), and configure the default gateway to the router's IP.**

Ans:-

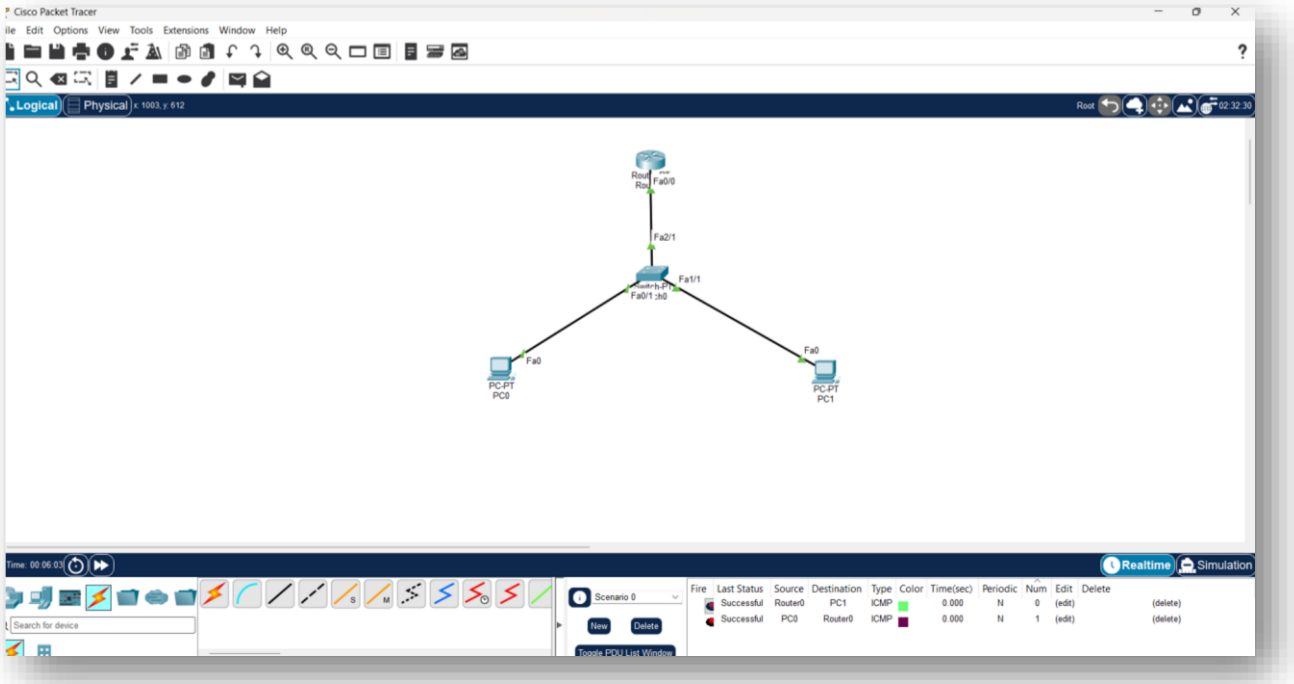

3. **Test connectivity by using the Packet Tracer 'ping' tool to verify that all PCs can communicate with each other and the router.**


Ans:-

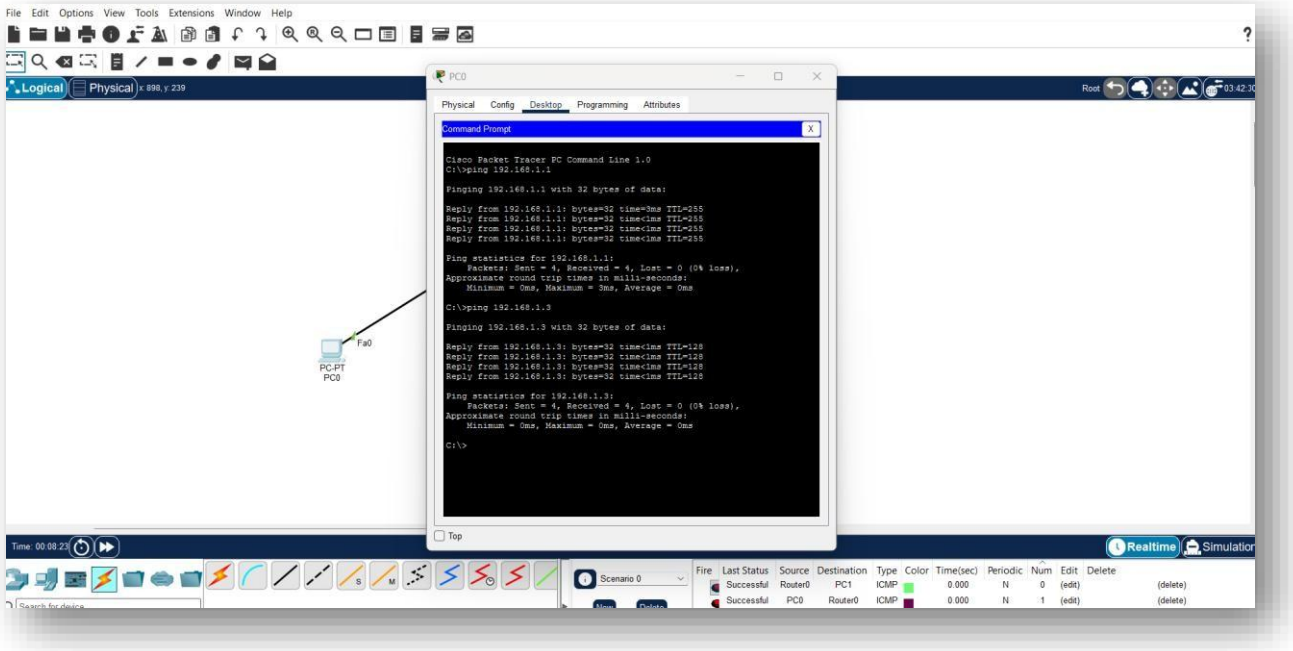

Result: Successfully tested connectivity using the ping command. All PCs can communicate with each other and the router.

4. **Document each step you took to build and configure your Packet Tracer network, including screenshots of your topology and the IP configuration windows for each PC, in a Word or PDF file.**

Ans:-

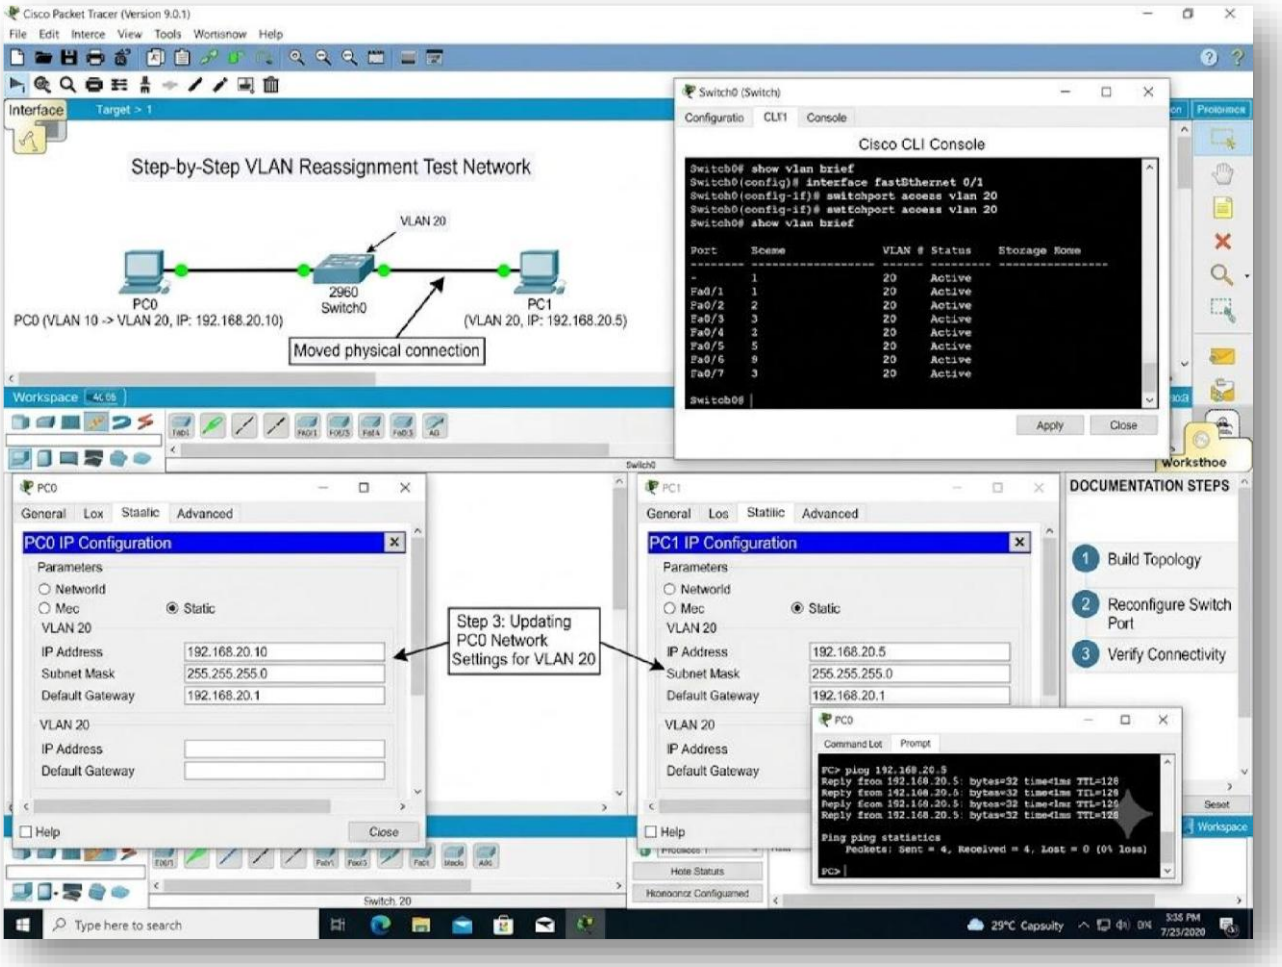

* **Steps to Build and Configure the Network in Cisco Packet Tracer**

Step 1: Add Network Devices

I opened Cisco Packet Tracer and added PCs, switches, and routers according to my network requirements.

Step 2: Connect the Devices

I connected the PCs to the switches and connected the network devices using suitable cables.

Step 3: Configure IP Addresses

I opened each PC, selected Desktop → IP Configuration, and assigned a unique IP address, subnet mask, and default gateway.

Step 4: Configure the Network

I configured the required switch ports and VLANs, where applicable, to organize the network devices.

Step 5: Verify the Configuration

I checked the IP configuration of each PC and verified that the devices were connected correctly.

Step 6: Test Connectivity

I opened the Command Prompt on each PC and used the ping command to test communication between devices.

Step 7: Save the Network

I saved my Packet Tracer project and captured screenshots of the network topology, PC IP configurations, and connectivity test results for documentation.