







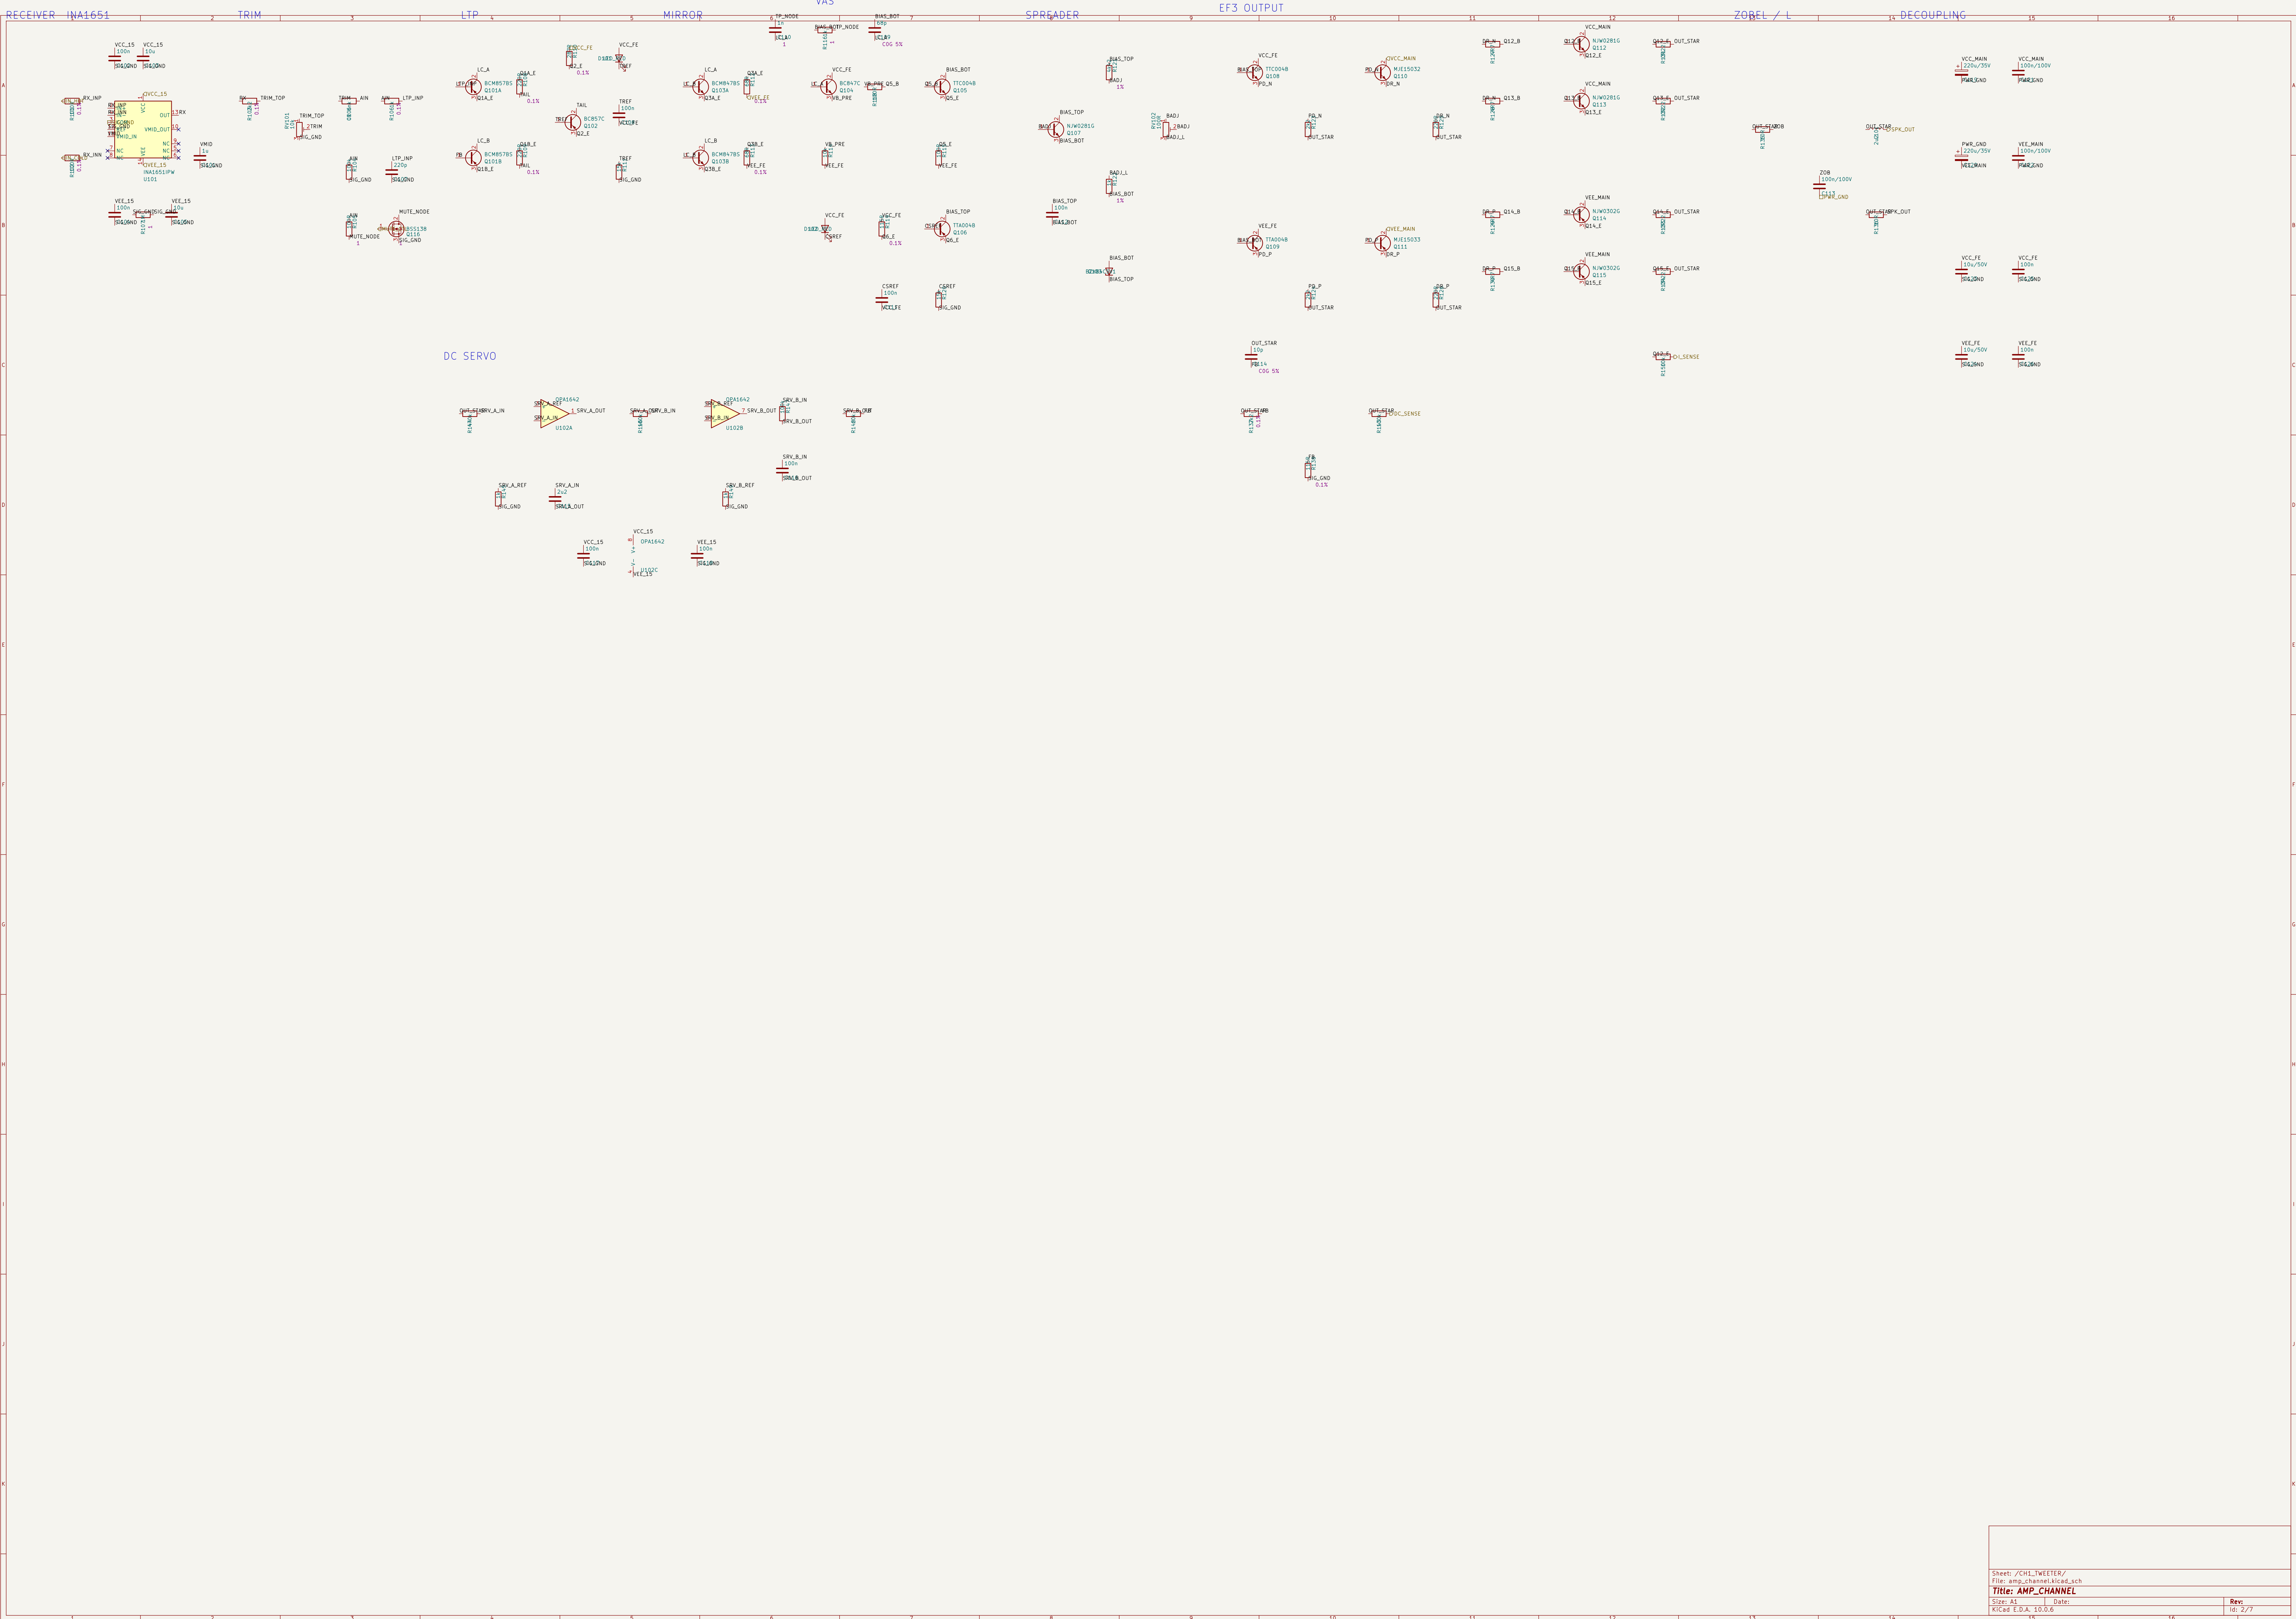

337 from aux) and ± 15 V (from ± 30 V)

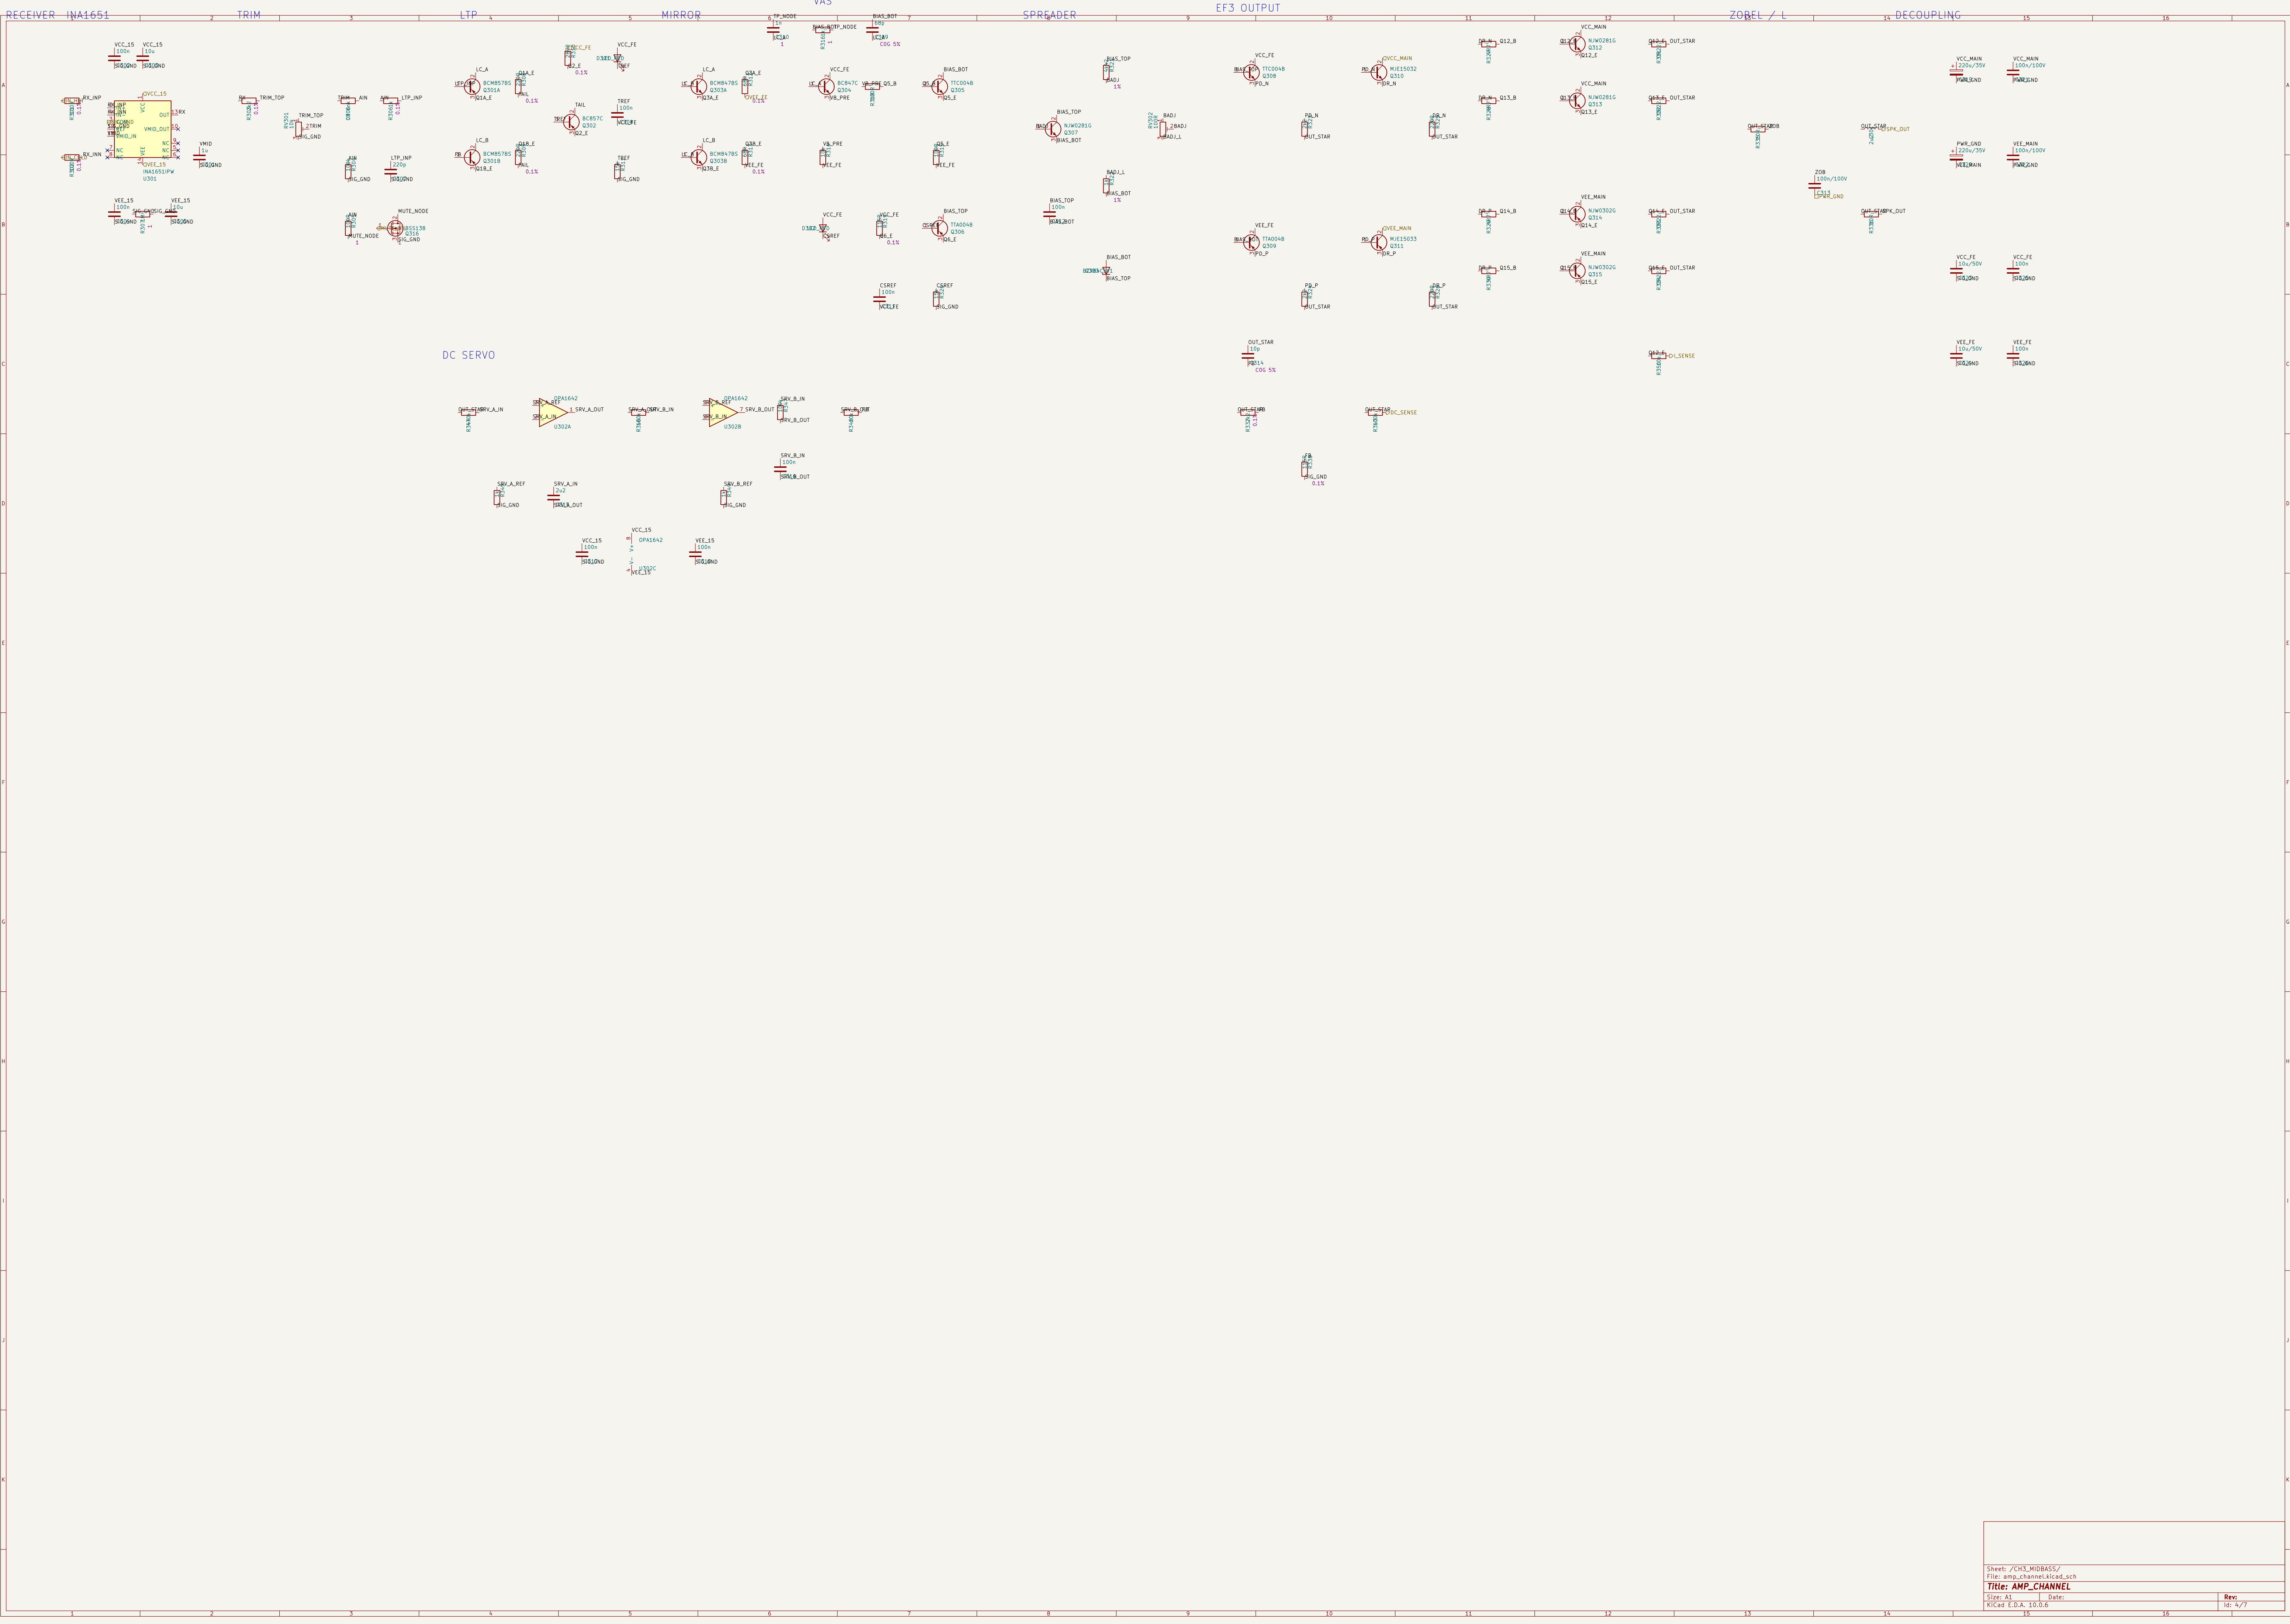

– see docs/04. Relay footprint G4A not yet drawn.

QDC_SENSE_T

QDC_SENSE_M

A

QDC_SENSE_B

Q_L_SENSE_T

Q_L_SENSE_M

Q_L_SENSE_B

D_MUTE_CTL

D_RELAY_T

D_RELAY_M

D_RELAY_B

D_SHUTDOWN

Q_REMOTE

QVCC_MAIN

QVEE_MAIN

QV_BATT

C

SIG_GND

PWR_GND

D

E

F

A

B

C






D

E

F

V_BATT

SIG_GND



MUTE_CTL






DC_SENSE_T

DC_SENSE_M

DC_SENSE_B

VCC_MAIN

VEE_MAIN



L_SENSE_T

L_SENSE_M

L_SENSE_B

REMOTE

SHUTDOWN

V_BATT

RELAY_T


V_BATT

RELAY_M

V_BATT


RELAY_B

V_BATT




PWR_GND

SPK_T



PWR_GND

SPK_M




PWR_GND

SPK_B



SIG_GND



V_BATT

V_BATT

V_BATT



SIG_GND



SIG_GND



SIG_GND

Sheet: /PROTECTION/
File: protection.kicad_sch

Title: PROTECTION

Size: A3

Date:

Rev:

KiCad E.D.A. 10.0.6

Id: 6/7

speakers, PSU entry, remote / shutdown


IN_HOT_T
IN_COLD_T
IN_HOT_M
IN_COLD_M
IN_HOT_B
IN_COLD_B
SPK_T
SPK_M
SPK_B
VCC_MAIN
VEE_MAIN
PWR_GND
AUX_POS
AUX_NEG
REMOTE
SHUTDOWN

SIG_GND
V_BATT


D

E


F




IN_HOT_T
IN_COLD_T




SPK_T
PWR_GND




IN_HOT_M
IN_COLD_M



SPK_M
PWR_GND



IN_HOT_B
IN_COLD_B



SPK_B
PWR_GND




VCC_MAIN
PWR_GND
VEE_MAIN



REMOTE
SIG_GND



SHUTDOWN
SIG_GND



AUX_POS
AUX_NEG
SIG_GND
V_BATT