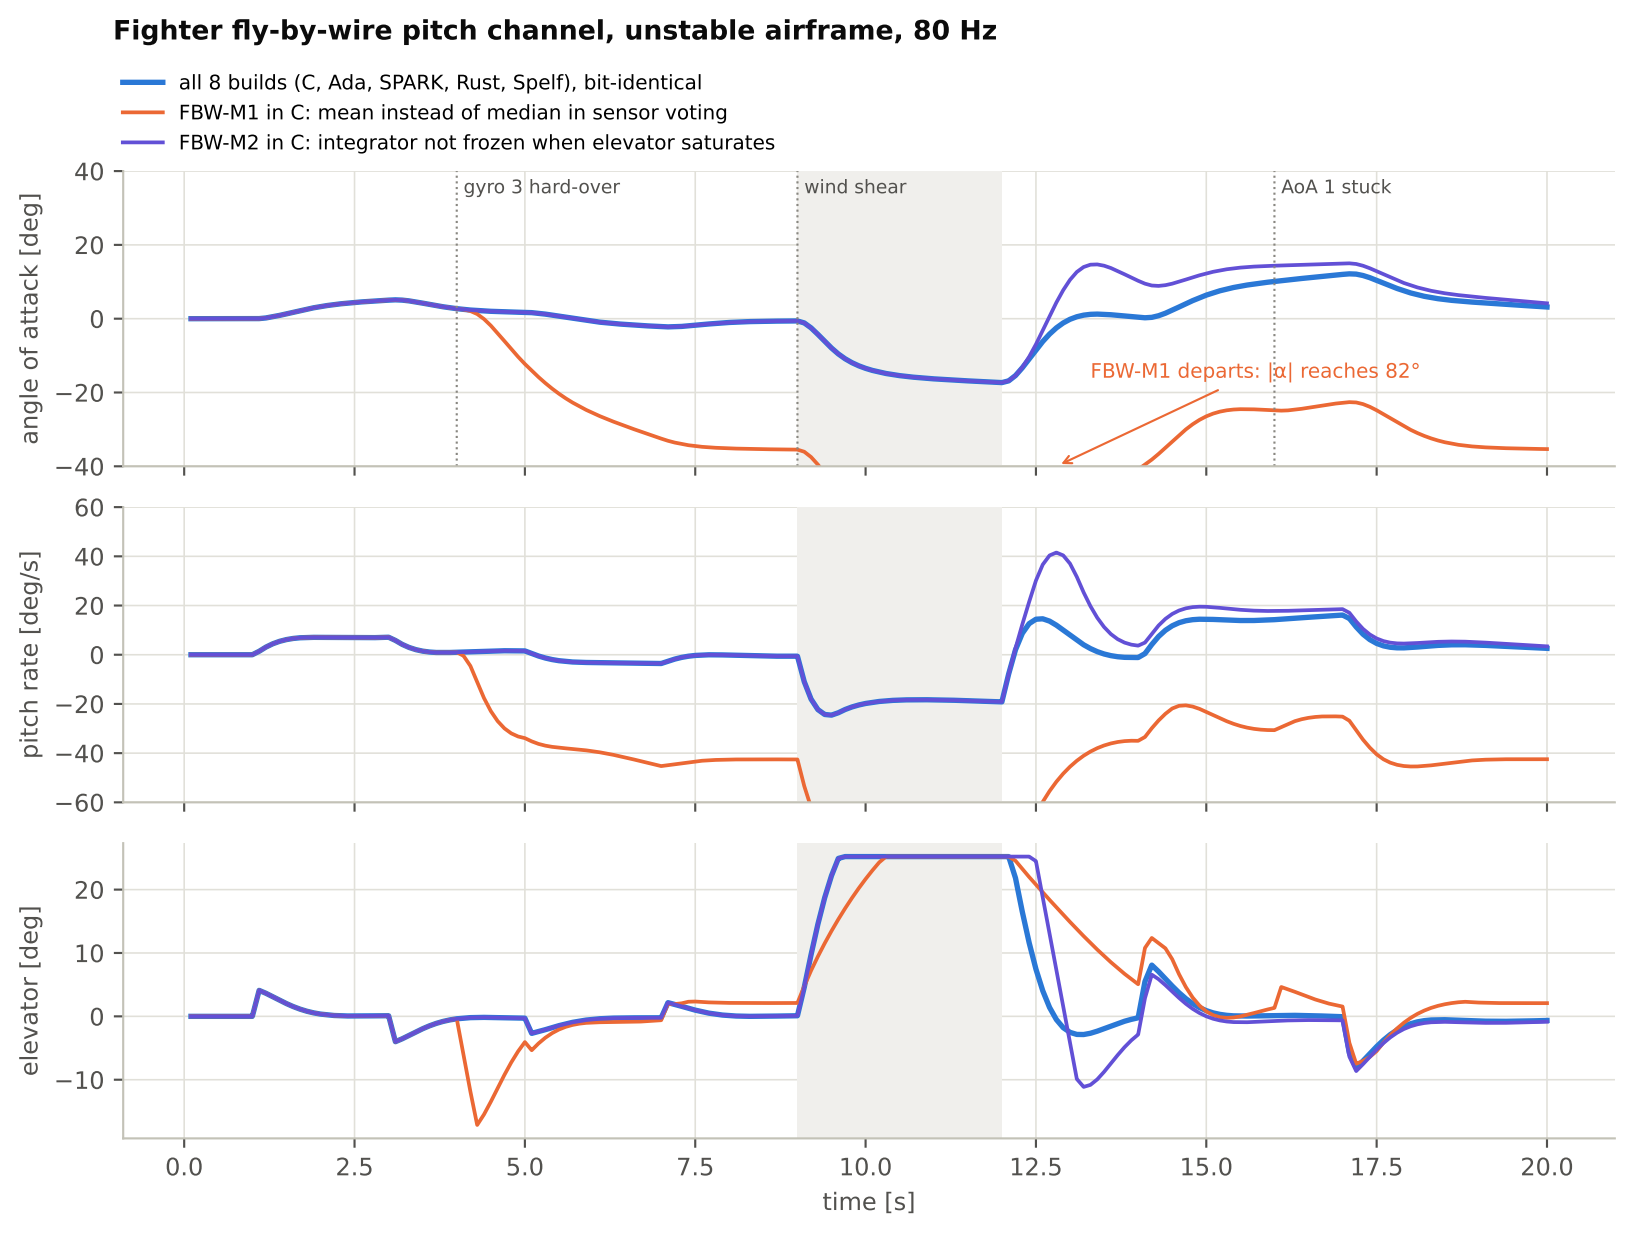
Fighter fly-by-wire pitch channel, unstable airframe, 80 Hz
all 8 builds (C, Ada, SPARK, Rust, Spelf), bit-identical
FBW-M1 in C: mean instead of median in sensor voting
FBW-M2 in C: integrator not frozen when elevator saturates
gyro 3 hard-over
wind shear
AoA 1 stuck
FBW-M1 departs: |α| reaches 82°
angle of attack [deg]
pitch rate [deg/s]
elevator [deg]
time [s]
40
20
0
−20
−40
60
40
20
0
−20
−40
−60
20
10
0
−10
0.0
2.5
5.0
7.5
10.0
12.5
15.0
17.5
20.0