
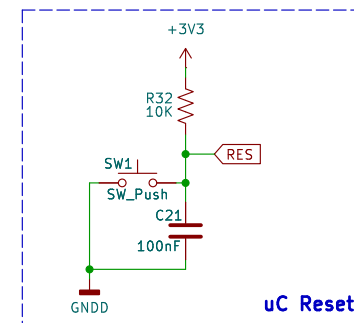

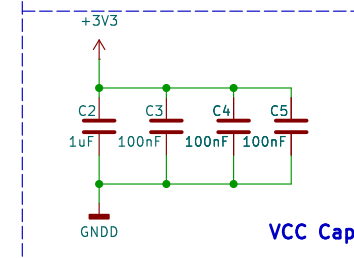



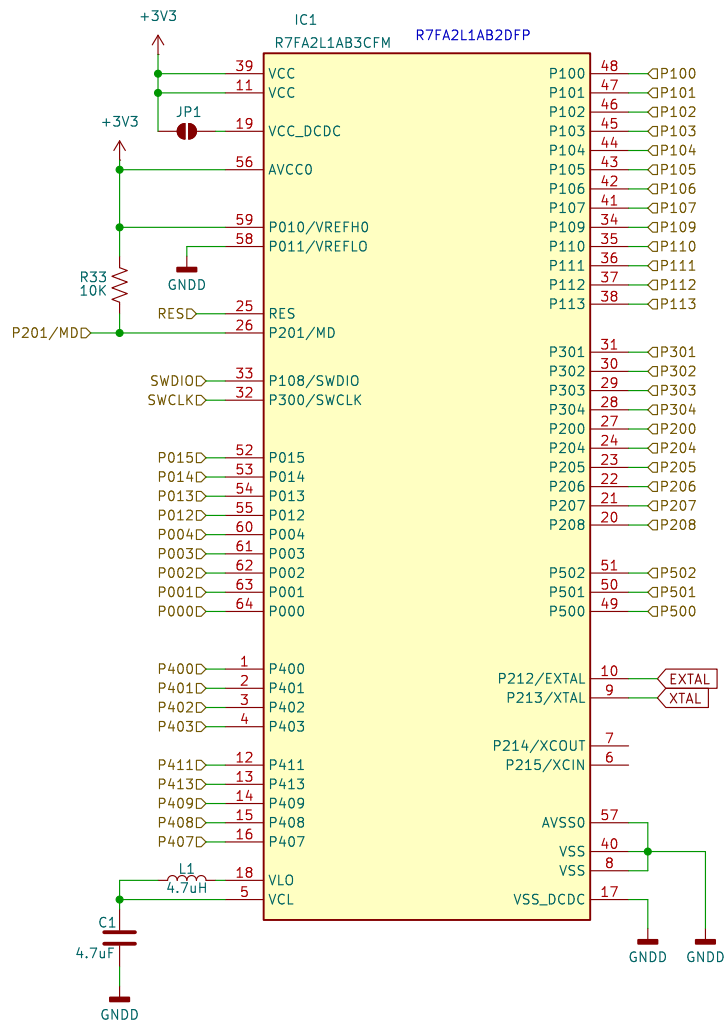

Sheet: /MCU/
File: MCU.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 9.0.1

Rev:



Id: 2/4

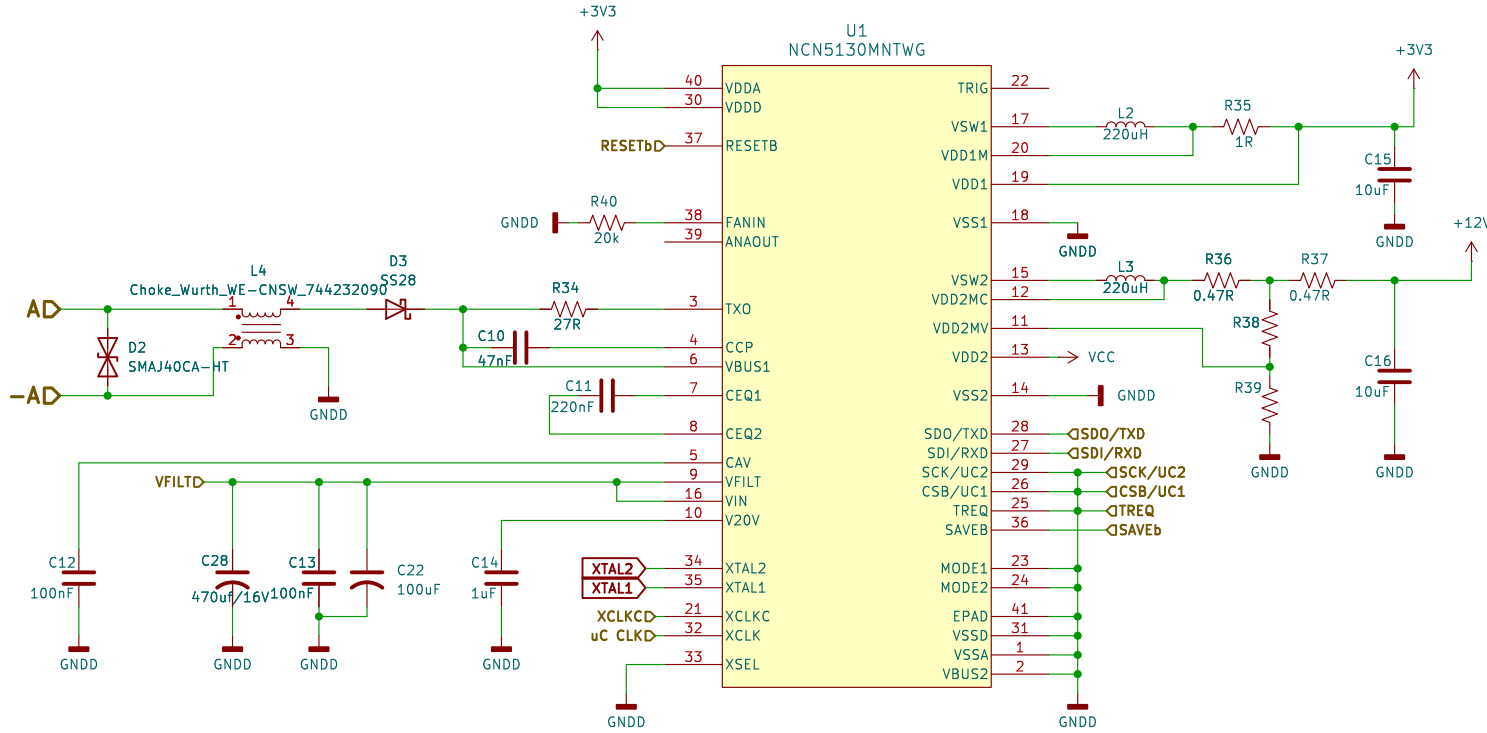

Typical Application Schematic, 9-bit UART Mode (19200bps), Dual Supply, External FANIN Configuration and 8 MHz Microcontroller Clock Signal

1. KNX gerekliliklerini karşılamak için C13 ve C14'nin toplam yükü 121 mC'yi aşmamalıdır.
2. C14 yüksek kondansatör değeri, geliştirme süresini etkileyebilir.
3. C14 Bu pini VFILT piniyle kısa devre yapmak mümkündür
4. R40 Herhangi bir direnç bağlanmamışsa veya 3,3 V'a çekilmemişse, KNX cihazı 10 mA'lık bir veri yolu yükü olarak sertifikalandırılmalıdır. Toprağa kısa devre yapıldığında, KNX cihazı 20 mA'lık bir veri yolu yükü olarak sertifikalandırılmalıdır. Toprağa 10 k ile 93,1 k arasında bir direnç bağlanırsa, cihaz 10 mA (42,2 k), 20 mA (20 k), 30 mA (13,3 k) veya 40 mA (10 k) bus yükü olarak sertifikalandırılmalıdır.

Comp.	Function	Min	Typ	Max	Unit
C13	Storage and filter capacitor VFILT	12.5	100	4000	uF
C14	Load Capacitor V20V	—	1	—	uF
R35	DC1 sensing resistor	0.47	1	10	R

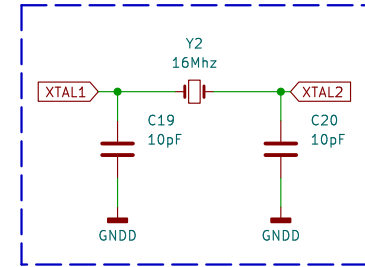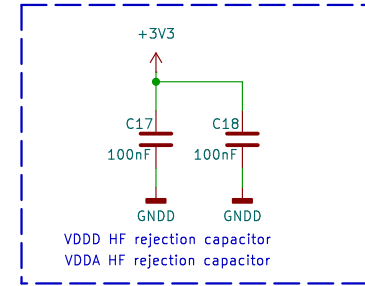

TREQ	MODE2	MODEL
0	0	UART
1	0	SPI 500kpbs

UC1	UC2	
0	0	9-bit, 19200bps
0	1	8-bit, 19200bps
1	0	9-bit, 38400bps
1	1	8-bit, 38400bps

Sheet: /Transceiver for KNx/
File: Transceiver for KNx.kicad_sch

Title:




Size: A4

Date:

KiCad E.D.A. 9.0.1

Rev:

Id: 3/4

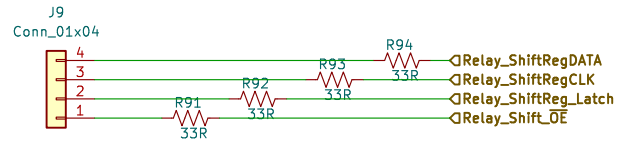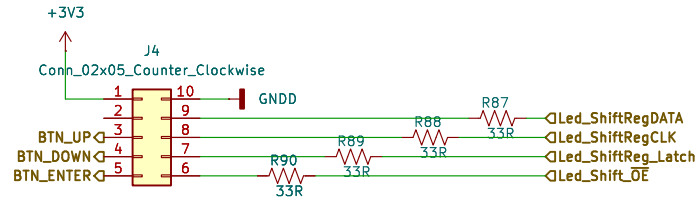

Sheet: /Connectors/
File: Connectors.kicad_sch

Title:

Size: A5
KiCad E.D.A. 9.0.1

Date:

Rev:

Id: 4/4