


www.zydexpaints.com



Zydex[®]

**ULTRA DURABLE
MINERAL PAINTS**





Zydex®

**ULTRA DURABLE
MINERAL PAINTS**



Established
in 1997



Innovating
to create a sustainable world through
conservation of resources



State-of-the-art R&D Labs
provide a strong foundation for its research
team to innovate for the anticipated needs
of tomorrow with a focus on sustainability




Pioneers
in non-polluting, non-hazardous and
durable technologies



Operates
across 4 business verticals - Textiles, Roads,
Paints & Waterproofing, and Agriculture



Our People, are our Pride!
we nurture and develop talent and help
them unleash their potential to create a
world-class organization



Globally Patented
nanotechnology solution provider



Global Presence
in over 40 countries

INNOVATING FOR SUSTAINABILITY




ABOUT US

Construction technologies from Zydex ranging from waterproofing to adhesives, sealants and paints are all designed for an exceptionally long service life of 20+ years, aiming for resource minimization. Zydex construction technologies make homes & buildings durable, beautiful and water resistant, thereby reducing the overall life cycle cost of construction.

The new range of Zydex mineral paint technologies are very durable, unlike the conventional polymer based paint. We aim to make the world look fresh and beautiful always. Our performance warranties can extend up to 15-25 years.

INTERIOR PAINTS | EXTERIOR PAINTS
WATERPROOFING | ADMIXTURES

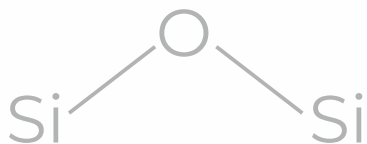

Zydex[®]

**ULTRA DURABLE
MINERAL PAINTS**

THE SILICATE MINERAL PAINT WITH Si-O-Si TECHNOLOGY FIRST TIME IN INDIA

Zydex Silicate Mineral Paints are built on the ultra-strong Si-O-Si bond, the same bond found in stone, tiles, and ceramics. Immune to UV rays and free radical damage, this mineral backbone gives unmatched durability and colour stability. Across the world, silicate-painted buildings have stood beautiful for over a century. Perfect for India's harsh sun, Zydex Silicate Mineral Paints keep your facades vibrant and protected for decades.



BREATHABLE

Mineral paints from Zydex are resistant to water ingress while maintaining the breathability of the surface. Thus, these paints can “exhale” water vapour while not allowing liquid water into the structure. This provides an ideal moisture balance that creates a more pleasant interior climate and a robust exterior facade.



Zydex®

**ULTRA DURABLE
MINERAL PAINTS**

FADE FREE

Zydex Mineral paints use only the highest quality lightfast earth metal oxide pigments. These pigments are completely stable against atmospheric UV, acids and weathering ensuring a fade-free facade for the lifetime of the paint. Thus, the combination of silicate binders and oxide pigments ensure that buildings retain their vibrant look for decades!

PENETRATIVE BONDING (NO PEEL-OFF)

Silicate paints exclusively use inorganic mineral pigments for their coloring properties. Due to their mineral nature these pigments are stable to UV. The UV stability of the mineral bond and its penetrative nature combined with mineral pigments ensure Zydex Silicate Mineral paints do not peel off, flake or fade and instead weather gracefully like stone over decades!



Zydex®

**ULTRA DURABLE
MINERAL PAINTS**



FIRE RESISTANT

The inorganic nature of the paint is highly resistant to flame spread in case of fire. This feature make these paints particularly safe for public places such as schools, libraries, hospitals, commercial buildings and residential high-rises.



WASHABLE

Zydex Mineral Paints are engineered for superior washability, allowing easy removal of stains and surface contaminants without impacting the finish. The mineral-bonded paint retains its brilliant matt appearance even after repeated cleaning. Designed to stay fresh, and visually consistent over the years.



Zydex®

**ULTRA DURABLE
MINERAL PAINTS**



BRILLIANT MATT

The crystalline nature of the binder results in a paint matrix that is essentially composed of millions of tiny crystals of glass. This results in unmatched transparency and brilliance that allows the natural radiance of the pigments to shine through. The sharp edged nature of these crystals also imparts a deep mineral matt effect that lends a luminous yet natural appearance to your structure.



ULTRA LOW VOCs

Mineral paints from Zydex rely on mineral binders such as potassium silicate that do not require any plasticisation from solvents thus eliminating the major source of Volatile Organic Content (VOCs). This makes mineral paints one of the greenest category of paints available. The paints are completely odour free and rooms can be occupied within 30 mins of painting. The absence of volatile solvents creates a more comfortable and safe environment for sensitive groups such as children, elderly and allergy sufferers. All mineral paints from Zydex are GreenPro® certified.



Zydex®

**ULTRA DURABLE
MINERAL PAINTS**



WATER RESISTANT

Mineral paints from Zydex are modified with cross-linking silicones to ensure excellent resistance to water ingress. Zydex mineral paints pass the RILEM test and can withstand extreme wind driven rains for sustained periods of time. Combined with their natural breathability and quick drying properties, Zydex Mineral Paints ensure your structures remain dry in the most demanding weather conditions.



EXTREME DIRT PICKUP RESISTANCE

Mineral paints from Zydex have very low organic content and retain their hardness on the hottest of days unlike acrylic paints. Thus, these paints do not become soft or tacky and do not bind to dust. Their mineral nature dissipates static charge from wind driven friction and does not actively attract dust in contrast to acrylic paints. Any dust that is loosely settled on the surface is instantly washed away through natural rainfall or washing during building maintenance.



Zydex[®]

**ULTRA DURABLE
MINERAL PAINTS**




Zydex[®]

**ULTRA DURABLE
MINERAL PAINTS**

CERTIFIED



GRIHA



Zydex[®]

**ULTRA DURABLE
MINERAL PAINTS**

EXTERIOR PAINT SOLUTIONS

Stonix

Ultra Durable Exterior Mineral Paint

Stonix is a ultra-durable mineral paint with a binder system comprising potassium silicate for exterior application. Made using only lightfast inorganic pigments it offers a service life of 15+ years without fading or peeling when applied on mineral surfaces. Its purely mineral character offers extreme dirt pickup resistance and its inherent alkalinity inhibits algae and fungal growth. Stonix has an ultra-matt appearance that enhances light reflectivity and effectively hides surface defects. Its inherent crystallinity provides unsurpassed color depth. Available in 230+ long lasting shades.

SPECIFICATIONS

Density	: 1.2 - 1.5 g / cm ³
Gloss at 85°	: 1.5
pH	: Approximately 11

APPLICATION

Stonix must be applied as two coat system. Both coats can be diluted between 20-30 percent using Potable Water depending on surface. The second coat is to be applied with a minimum gap of 12 hours between coats. Cover all surfaces which are not to be painted, in particular those that are mineral in nature such as glass, stone, ceramics etc.

COVERAGE

Approximately 4.6 m² / ltr (50 sq.ft. / ltr) for 2 coats. Consumption guideline is quoted for smooth surfaces with normal absorbency. Actual consumption may vary substantially based on surface characteristics.

KEY FEATURES

- › No Fading
- › No Peel-Off
- › Breathable
- › Water Impermeable
- › Extreme Dirt-Pickup Resistance
- › Flame Spread Resistant
- › Intense Colours
- › Ultra Matt



PACKING

1L, 4L & 20L



Xtend Ultra

High Performance Exterior Paint

Xtend Ultra is a high performance paint for exterior application. Made using only lightfast inorganic pigments it offers a service life of 10+ years without fading or peeling. Its combination of a special binder design and unique fillers offer excellent dirt pickup resistance. Its inherent breathability and water impermeability naturally inhibits algae and fungal growth. Xtend Ultra has a mineral matt appearance that enhances light reflectivity and effectively hides surface defects. Available in 59+ durable shades.

SPECIFICATIONS

Density	: 1.2 - 1.5 g / cm ³
Gloss at 85°	: 1.5
pH	: Approximately 11

APPLICATION

Xtend Ultra must be applied as two coat system. Both coats can be diluted between 20-30 percent using Potable Water depending on surface. The second coat is to be applied with a minimum gap of 12 hours between coats. Cover all surfaces which are not to be painted, in particular those that are mineral in nature such as glass, stone, ceramics etc.

COVERAGE

Approximately 4.6 m² / ltr (50 sq.ft. / ltr) for 2 coats.
Consumption guideline is quoted for smooth surfaces with normal absorbency. Actual consumption may vary substantially based on surface characteristics.

KEY FEATURES

- › No Fading
- › No Peel-Off
- › Breathable
- › Water Impermeable
- › Excellent Dirt-Pickup Resistance
- › Ultra Matt
- › 10+ Years of Service Life



PACKING

1L, 4L & 20L



Xtend

Premium Exterior Paint

Xtend is a premium paint for exterior application. Made using only lightfast pigments it offers a service life of 7+ years without fading or peeling. Its special organo-silicate binder design and unique filler composition offers excellent dirt pickup resistance and its inherent breathability combined with water repellent nature inhibits algae and fungal growth. Xtend has a mineral matt appearance that enhances light reflectivity and effectively hides surface defects. Available in 59+ durable shades.

SPECIFICATIONS

Density	: 1.20 - 1.50 g / cm ³
Gloss at 85°	: 1.5
pH	: Approximately 10.5

APPLICATION

Xtend must be applied as two coat system. Both coats can be diluted between 20-30 percent using Potable Water depending on surface. The second coat is to be applied with a minimum gap of 12 hours between coats. Cover all surfaces which are not to be painted, in particular those that are mineral in nature such as glass, stone, ceramics etc.

COVERAGE

Approximately 4.6 m² / ltr (50 sq.ft. / ltr) for 2 coats. Consumption guideline is quoted for smooth surfaces with normal absorbency. Actual consumption may vary substantially based on surface characteristics.

KEY FEATURES

- › No Fading
- › No Peel-Off
- › Breathable
- › Water Impermeable
- › Excellent Dirt-Pickup Resistance
- › Ultra Matt
- › 7+ Years of Service Life
- › GreenPro® Certified



PACKING

1L, 4L & 20L





Zydex®

**ULTRA DURABLE
MINERAL PAINTS**



Xtend Brick

Ready to Apply Natural Brick Tone Paint

Xtend Brick is a high performance natural brick tone paint for exterior application on surfaces such as old brick facades. It can also be used on other general surfaces to create brick effects. It preserves the breath-ability of bricks while providing protection against weathering elements. It's brilliant matt look and a classic brick tone provide a unique aesthetic to your walls that cannot be replicated with standard acrylic paints. This product comes with a standard 7 year performance warranty.

SPECIFICATIONS

Density	: 1.20 - 1.50 g / cm ³
Gloss at 85°	: 1.5
pH	: Approximately 11

APPLICATION

Xtend Brick must be applied as two coat system. Both coats can be diluted between 20-30 percent using Potable Water depending on surface. The second coat is to be applied with a minimum gap of 12 hours between coats. Cover all surfaces which are not to be painted, in particular those that are mineral in nature such as glass, stone, ceramics etc.

COVERAGE

Approximately 3.25 m² / ltr (35 sq.ft. / ltr) for 2 coats on brick surfaces.

Consumption guideline is quoted for brick surfaces with normal absorbency. Actual consumption may vary substantially based on surface characteristics and will increase for smooth surfaces.

KEY FEATURES

- › No Fading
- › No Peel-Off
- › Breathable
- › Water Impermeable
- › Excellent Dirt-Pickup Resistance
- › Ultra Matt
- › 7+ Years of Service Life
- › Natural Brick Tone



PACKING


1L, 4L & 20L





Zydex[®]

**ULTRA DURABLE
MINERAL PAINTS**



Zydex®

**ULTRA DURABLE
MINERAL PAINTS**

INTERIOR PAINT SOLUTIONS

Premium Matt

Premium Matt Interior Paint

Premium Matt is a premium interior paint with a rich matt finish. It's inherent deep matt effect and carefully selected pigments provide unsurpassed color depth and brilliancy even in the most difficult lighting conditions. Premium Matt's ability to hide surface defects leads to an even and consistent finish even at sharp angles. The paint is extremely resistant to burnishing and mechanical abrasion making it suitable for even the most demanding high traffic interior spaces. Being highly breathable, it is extremely resistant to peel-off and blistering. Designed for excellent dirt release, it is easily washable and highly scrub resistant. Available in a wide range of colours.

SPECIFICATIONS

Density	: 1.20 - 1.50 g / cm ³
Gloss at 85°	: < 2
Flash Point	: N/A

APPLICATION

Premium Matt must be applied in principle as a two coat system diluted with water up to 30 percent. In case of patchy or inhomogeneous surfaces a third coat may be required. A minimum gap of 4 hours must be observed between subsequent coats. Cover all surfaces which are not to be painted. Please ensure that at no point is Premium Matt diluted beyond 30 percent as this may severely affect the end film properties.

COVERAGE

Approximately 7 m² / ltr (75 sq.ft. / ltr) for 2 coats. Consumption guideline is quoted for smooth surfaces with normal absorbency. Actual consumption may vary based on surface characteristics and is the responsibility of the applicator.

KEY FEATURES

- › Rich Matt Finish
- › Low Odour, Low VOC
- › Breathable
- › Excellent Burnish Resistance
- › Anti-Fungal
- › Bright Colours
- › Washable
- › Wide Range of Colours

PACKING

1L, 4L & 20L





Marvella

Luxury Interior Paint

Marvella is a luxury interior paint with a pleasant sheen that results in a soft glow on your walls. The paint has a soft hand feel with a smooth lustrous finish. Enhanced with ceramics, it is a highly washable paint with excellent stain release properties with even the toughest of stains. The innovative binder technology eliminates patchiness during application and provides an odourless experience for the occupier of the space. It is available in an extremely wide range of colours.

SPECIFICATIONS

Density	: 1.20 - 1.50 g / cm ³
Gloss at 85°	: 8-12
Flash Point	: NA

APPLICATION

Marvella must be applied in principle as a two coat system diluted with water between 20 to 30 percent. A minimum gap of 4 hours must be observed between subsequent coats. Cover all surfaces which are not to be painted. Please ensure that at no point is Marvella diluted beyond 30 percent as this may severely affect the end film properties.

COVERAGE

Approximately 7.5 m² / ltr (80 sq.ft. / ltr) for 2 coats. Consumption guideline is quoted for smooth surfaces with normal absorbency. Actual consumption may vary based on surface characteristics and is the responsibility of the applicator.

KEY FEATURES

- › Pleasant Soft Sheen
- › Low Odour, Low VOC
- › Seamless Finish
- › Excellent Stain Resistance
- › Anti-Fungal
- › Bright Colours
- › Highly Washable
- › Wide Variety of Colours

PACKING

1L, 4L & 20L





Zydex®

**ULTRA DURABLE
MINERAL PAINTS**



PRIMER SOLUTIONS

PREMIUM **WALL PRIMER**

Water Based Acrylic Wall Primer for Interior and Exterior Application

Zydex Premium Wall Primer is an acrylic water based wall primer with excellent bonding and hiding characteristics. It has excellent sandability and provides a smooth base for over- painting. It is suitable for exterior and interior applications.

SPECIFICATIONS

Appearance	: White Viscous liquid
Chemical Nature	: Acrylic
Dilution Ratio	: 1 : 0.8 to 1.2
VOC	: < 50 gms. / litre

APPLICATION

Dilution : Dilute 1 ltr of Zydex Premium Wall Primer with 0.8 to 1.2 ltrs potable water.

Application : Brush, roll or spray 1 coat of Zydex Premium Wall Primer on prepared vertical walls. Allow it to dry for 6-8 hours.

COVERAGE

Interior Walls: 140–160 sqft (13–15 m²) / ltr

Exterior Walls: 100–120 sqft (9–11 m²) / ltr

Note: Actual coverage may vary depending on surface texture and application method.

KEY FEATURES

- › Excellent Opacity
- › Excellent Bonding
- › Easily Sandable
- › Smooth Finish
- › Interior and Exterior

PACKING

1L, 4L, 10L & 20L



Xtend WallPrime

Silicate Primer for Exterior

Xtend WallPrime is a silicate based wall primer with excellent bonding to masonry surfaces and old coatings while providing super top coat adhesion for silicate based paints from Zydex. It maintains breathability of the walls and is suitable for exterior use.

SPECIFICATIONS

Density : 1.20 - 1.50 g / cm³

pH : Approximately 11

APPLICATION

Xtend Wallprime must be applied as a single coat system. It can be diluted between 50-80 percent using Potable Water depending on surface. Cover all surfaces which are not to be painted, in particular those that are mineral in nature such as glass, stone, ceramics etc.

COVERAGE

Approximately 10 m² / ltr (108 sq.ft. / ltr) for single coats.

Consumption guideline is quoted for smooth surfaces with normal absorbency. Actual consumption may vary substantially based on surface characteristics.

KEY FEATURES

- › Silicate Based
- › Penetrative Bonding
- › Excellent Top Coat Adhesion
- › Breathable
- › For Exterior Use

PACKING

1L, 4L & 20L



Xtend WallPrime Stain Block

Stain Blocking Primer for Interior / Exterior

Xtend WallPrime Stain Block is a special primer to be used when painting with silicate based paints on poor surfaces where the absorbency is non-uniform leading to patchy appearance particularly in dark colours. It also prevents surface contaminants from rising to the surface such as oils and greases. It prevents paints from flashing prematurely which can lead to non-uniform appearance.

SPECIFICATIONS

Density : 1.20 - 1.50 g / cm³

pH : Approximately 9

APPLICATION

Xtend Wallprime Stain Block must be applied as a single coat system. It can be diluted between 50-80 percent using Potable Water depending on surface. Cover all surfaces which are not to be painted, in particular those that are mineral in nature such as glass, stone, ceramics etc.

COVERAGE

Approximately 8.5-10 m² / ltr (90-110 sq.ft. / ltr) for single coats.

Consumption guideline is quoted for smooth surfaces with normal absorbency. Actual consumption may vary substantially based on surface characteristics.

KEY FEATURES

- › Excellent Bonding
- › Barrier Coating
- › Excellent Top Coat Adhesion
- › Provides Uniform Appearance to Top Coat
- › For Interior / Exterior Use

PACKING

1L, 4L & 20L





Silicate Primer for Interior

PrimoSil Interior Silicate Primer is a silicate based wall primer for interior use with excellent bonding and hiding characteristics and is suitable for interior silicate paints from Zydex. It has excellent sandability and provides a smooth base for over-painting.

SPECIFICATIONS

Appearance	: White Viscous liquid
Chemical Nature	: Silicate
Dilution Ratio	: (1 : 0.8 to 1.2)
VCO Dilution Ratio	: < 50 gms. / litre

APPLICATION

PrimoSil must be applied as a single coat. It can be diluted between 80-120 percent using Potable Water depending on surface. Cover all surfaces which are not to be painted, in particular those that are mineral in nature such as glass, stone, ceramics etc.

COVERAGE

Interior: 130 sqft / ltr

*Actual coverage may vary due to factors such as method & condition of application, surface roughness and porosity.

KEY FEATURES

- › Excellent Opacity
- › Excellent Bonding
- › Easily Sandable
- › Smooth Finish
- › Interior Use

PACKING

1L, 4L & 20L



Xtend WallTex

Wall Textures

Elevate your walls with the perfect blend of resilience and design. Choose from range of textures for a surface that performs as beautifully as it looks. The Textures are designed to bring both aesthetic appeal and robust protection to your surfaces. These are prepared using finest quartz and Dolomite dispersed in a silicon acrylic medium enhanced with high-performance fungicides and bio-cides. They are easy to apply and are ideal for exterior surfaces. Can also be used on interior cement plaster, gypsum board, and woodwork.





Zydex[®]

**ULTRA DURABLE
MINERAL PAINTS**








Designer Textures

Transform your walls into dynamic, high-performance surfaces with Xtend WallTex Designer Textures. Crafted to deliver exceptional durability with stunning aesthetic appeal, Xtend WallTex enables you to create unique, seamless, and visually captivating wall finishes.

The intricate blend of colours forms a vibrant, speckled texture that beautifully conceals surface imperfections while adding depth and character to any interior.

KEY FEATURES

- › **Exceptional Durability:** Highly resistant to abrasion and impact, ensuring a long-lasting, pristine surface.
- › **Aesthetic Versatility:** Available in a wide range of multi-colour flake blends, offering limitless design possibilities.
- › **Low Maintenance:** Easy to clean and maintain, ensuring a hygienic and elegant finish.
- › **Seamless Application:** Creates a uniform, joint-free wall surface that combines functionality with beauty.
- › **Exclusive for Walls:** Specially formulated for vertical applications, ensuring optimal adhesion and superior appearance.
- › **Sunlight Resistance:** Contains non-yellowing agents that provide superior UV protection, preventing colour fading.
- › Elevate your interiors with the perfect balance of resilience and design.
- › Choose Xtend WallTex Designer Textures - a surface that performs as beautifully as it looks.

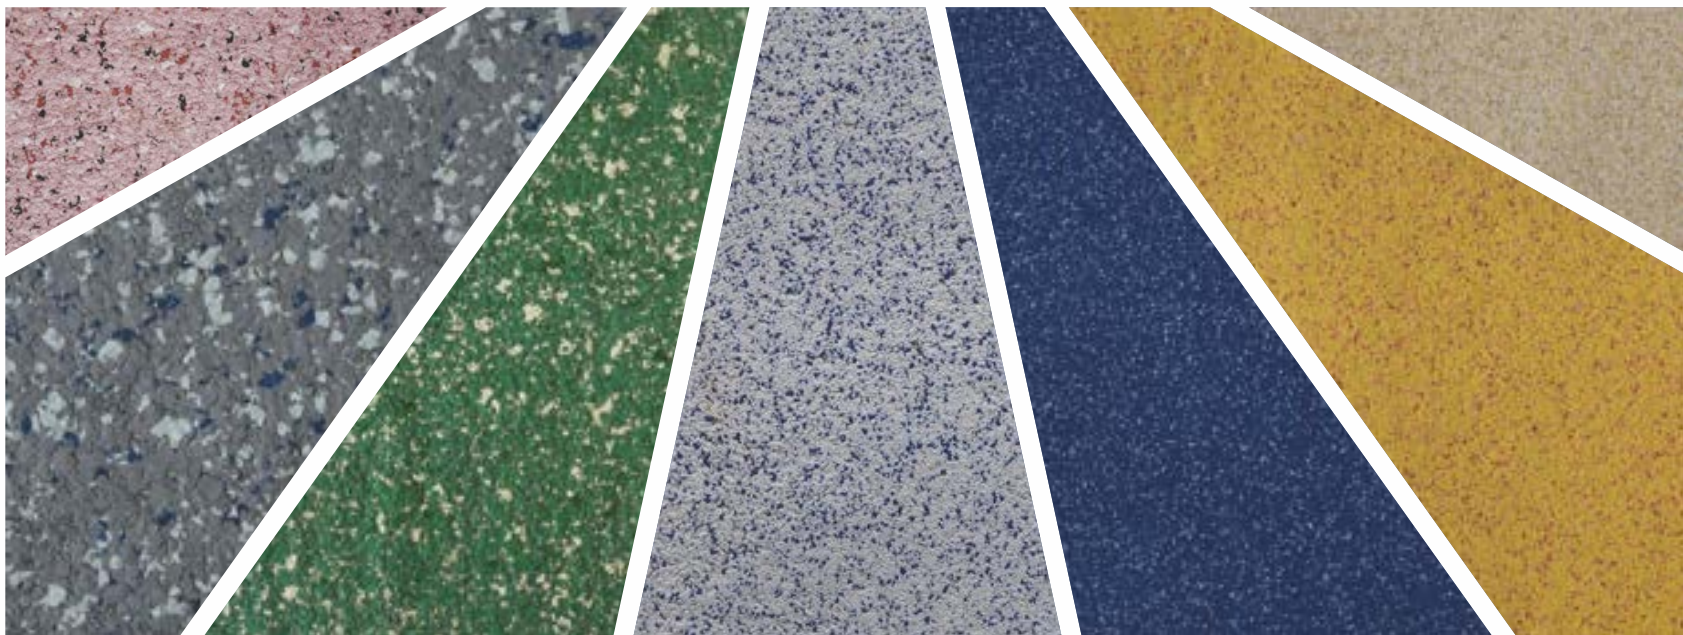



WATERPROOFING SOLUTIONS



Organosilane based Reactive Waterproofing Technology

ZycoSil+ is a reactive organosilane based water proofing agent that seals upto nano-pore level. It has an ability to penetrate upto 2 mm deep inside the substrate and becomes a permanent integral part of the structure. It reacts and converts the hydrophilic chemical groups of the substrate into hydrophobic groups. ZycoSil+ is water dilutable, safe, sprayable and easy to apply. ZycoSil+ is non-leachable, UV resistant, breathable and does not present peel-off issues unlike conventional polymer coatings.

SPECIFICATIONS

Form	: Light Pale Yellow Clear Liquid
Viscosity @ 25°C	: < 100 cps
Specific Gravity	: 0.91 ± 0.01
Flash Point	: 12°C
Odour	: Low Odour
Solubility (in Water)	: Easily Soluble
pH	: Approx. 6 ± 1
Dilutant	: Clean Potable Water TDS < 1000 ppm pH - 6.5 to 7

COVERAGE

Horizontal	: 24-40 m ² (260 - 430ft ²)
Vertical	: 60-100 m ² (645 - 1075 ft ²)

Actual coverage may vary as it depends upon permeability and absorption characteristics of the substrate.

KEY FEATURES

- › Organosilane Technology
- › Reactive, Penetrative & Permanent
- › Easy to Apply
- › Breathable & UV Resistant
- › Protects against Algae and Fungal Growth
- › Waterproofs Vertical and Horizontal Surfaces
- › Protects Substrate from Deterioration due to Weathering

PACKING

100ml, 250ml, 1L, 5L & 20L





Acrylic Based Sealing, Bonding & Admixture Agent

ZycoPrime is an acrylic co-polymer emulsion supplied as a ready to use bonding agent with superior wet adhesion and universal compatibility. It is also a versatile latex that can be used as a cement modifier for spalled concrete slabs, overhangs, beams, columns and floors. It is also used as a bonding primer and porosity filler with ZycoSil+ during waterproofing applications.

SPECIFICATIONS

Form	: Milky White, Free flowing Liquid
Viscosity @ 25°C	: < 500 cps
Specific Gravity	: 1.01 to 1.02
Flash Point	: Non Flammable
Solid Content	: 35 ± 1%
pH @ 25°C	: 6 to 7
Dilutant	: Clean Potable Water TDS < 1000 ppm

COVERAGE

Vertical Surfaces (Concrete, Brick & Stone) : Approx. 60-100m² (645-1075 ft²) per 2 litres of ZycoPrime+ diluted in a 21 litre solution of 1:20 ZycoSil+ solution in water.

Horizontal Concrete Surfaces : Approx. 24-40m² (260-430 ft²) 2 litre of ZycoPrime+ diluted in a 21 litre solution of 1:20 ZycoSil+ solution in water.

The coverage may vary depending upon permeability of the substrate and surface absorptivity.

KEY FEATURES

- › Sealing & Bonding Agent
- › Multipurpose & Economical
- › Excellent Wet Adhesion
- › Universal Compatibility
- › Excellent Bonding to Cementitious Concrete & Plaster Surfaces
- › High-performance Cement Admixture

PACKING

250ml, 1L, 5L, 20L & 35L





New Generation Organosilane Reactive Waterproofing Technology

Zycosil Max is a new generation reactive organosilane based water proofing agent that seals nanopores & nano - cracks. It is concentrated, highly penetrative & a strong water-repellent. It has an ability to penetrate up to 4 mm deep inside the substrate & become an integral part of the structure. Zycosil Max is water dilutable, safe and easy to apply by roller & brush. It is non - leachable, UV - resistant, breathable & does not present peel-off issues like conventional polymer coatings.

SPECIFICATIONS

Form	: Pale Yellow Transparent Liquid
Viscosity @ 25°C	: 100 - 500 cps
Specific Gravity	: 1.18 ± 0.01 @ 30°C
Flash Point	: > 75°C
Odour	: Slightly Sweet
Solubility (in Water)	: Easily Soluble
pH @ 25°C	: Approx. 6 ± 1
Dilutant	: Clean Potable Water TDS < 1000 ppm pH - 6.5 to 7

COVERAGE

Horizontal: 24-40 m² (260-430 ft²)

Actual coverage may vary as it depends upon permeability and absorption characteristics of the substrate.

KEY FEATURES

- › Organosilane Technology
- › Reactive, Penetrative & Permanent
- › Easy to Apply
- › Breathable & UV Resistant
- › Protects against Algae and Fungal Growth
- › Suitable for Horizontal Surfaces Only
- › Protects Substrate from Deterioration due to Weathering
- › Penetrates Deep up to 4 mm

PACKING

1L & 5L



ZYCOBONDMAX

Nano Acrylic Sealer & Bonding Agent

ZycoBond Max is a nano acrylic co-polymer (70-90 nm primary particle size) for improved water resistance for concrete and cement plaster surfaces. ZycoBond Max when used in combination with ZycoSil Max seals and waterproofs siliceous construction materials.

It provides excellent wetting and bonding to the water repellent surfaces achieving excellent bond strength. It provides flexible, reactive and water resistant polymer film for long life.

SPECIFICATIONS

Form	: Translucent Liquid Dispersion
Solid content	: 35 ± 1%
Specific Gravity	: 1.0 ± 1.2
Flash Point	: Above 85°C
Bulk Viscosity	: < 200 cps
Solubility (in Water)	: Easily Soluble
pH	: 5.5 - 6.5
Particle Size	: < 90 nm

COVERAGE

Horizontal Concrete Surfaces : Approx. 24-40m² (260-430 ft²)

Vertical Surfaces (Concrete, Brick & Stone) : Approx. 60-100 m² (645-1075 ft²)

The coverage may vary depending upon permeability of the substrate and surface absorptivity.

KEY FEATURES

- › Reduces porosity
- › Excellent water resistance
- › Excellent wet adhesion
- › Strong bonding to cementitious concrete & plaster surfaces

PACKING

1L & 5L



ZYCOFLEX

SBR Based Sealer & Bonder

SBR Based Sealing, Bonding & Cementitious Membrane Coating

ZycoFlex is based on modified Styrene butadiene latex used for high performance applications in waterproofing and repairs. It is used for repairs of spalled concrete such as – floors, columns, beams, chhajjas, slabs & waterproofing of toilets & bathrooms & terraces. It bonds strongly to old & new concrete & plaster.

SPECIFICATIONS

Appearance	: Free flowing liquid
Colour	: Milky white
Specific Gravity @30°C. gms / ml	: 1.00 - 1.05
Non Volatile matter, %	: 42 - 44
pH value	: 7 - 10
Bond strength, N/sq mm	: 5
Chemical resistance	: Resists mild acids & alkalies
Freeze thaw resistance	: Excellent

COVERAGE

Horizontal: 24-40 m² (260-430 ft²)

Actual coverage may vary as it depends upon permeability and absorption characteristics of the substrate.

KEY FEATURES

- › Sealing & Bonding Agent
- › Multipurpose & Economical
- › Excellent Wet Adhesion
- › Universal Compatibility
- › Excellent Bonding to Cementitious Concrete & Plaster Surfaces
- › High-performance Cement Admixture

PACKING

1L & 5L





Zydex®

**ULTRA DURABLE
MINERAL PAINTS**





Zydex[®]

**ULTRA DURABLE
MINERAL PAINTS**

LIQUID MEMBRANES

ELASTOSTRETCH

ACRYLIC STRETCHABLE MEMBRANE

Single Component Acrylic Elastomeric Membrane

ElastoStretch is a high performance elastomeric roof coating designed to be used along with Zycosil+. It is highly UV durable and has a service life of up to 10 years. It features the ability to bridge cracks up to 1.5 mm. In combination with Zycosil+, ElastoStretch provides a waterproofing system that is a combination of a penetrative barrier with a seamless topcoat resulting in superior performance.

SPECIFICATIONS


Application Temp.	: 5°C to 35°C
Appearance	: Viscous Liquid
Color	: White & Terracotta
Specific Gravity	: 1.35
Viscosity	: 20,000 ± 2,000 cps
Solids by Wt. %	: 64 - 66%
Elongation	: 400%

COVERAGE

20-22 Sq.ft. / ltr per two coats

KEY FEATURES

- › UV Durable & Crosslinking
- › Crack-Bridging up to 1.5 mm
- › 10 years service life
- › To be used in combination with Zycosil+
- › Reduces surface temperature up to 10° C



PACKING

1L, 4L & 20L



ELASTOMAX PU

PU STRETCHABLE MEMBRANE

Single Component Polyurethane Modified Elastomeric Membrane

ElastoMax PU is a high performance elastomeric roof coating designed to be used along with Zycosil Max. It is highly UV durable and has a service life of up to 15 years. It features the ability to bridge cracks up to 2.5 mm. In combination with Zycosil Max, ElastoMax PU provides a waterproofing system that is a combination of a penetrative barrier with a seamless topcoat resulting in superior performance.

SPECIFICATIONS


Application Temp.	: 5°C to 35°C
Appearance	: Viscous Liquid
Color	: White & Terracotta
Specific Gravity	: 1.35
Viscosity	: 20,000 $\pm$ 2,000 cps
Solids by Wt. %	: 64 - 66%
Elongation	: 400%

COVERAGE

22-26 Sq.ft. / ltr per two coats

KEY FEATURES

- › UV Durable & Crosslinking
- › Crack-Bridging up to 1.5 mm
- › 15 Years Service Life
- › To be Used in Combination with Zycosil Max
- › Reduces Surface Temperature by 7-8 Degrees



PACKING

1L, 4L & 20L



ELASTOSIL

Waterproofing Elastomeric Membrane Formation with Grey Cement

Elastosil is a high performance elastomeric membrane for waterproofing on a cracked surface. It features curing through room temperature crosslinking and is highly water resistant. It can elongate up to 250 percent. It can be used on variety of substrates. Needs grey cement to be added for easy application and consistency.

SPECIFICATIONS

Form	: Creamish white Viscous Liquid
Solid content	: 75 ± 1%
Specific Gravity	: 1.49 to 0.01
Flash Point	: Non Flammable
Bulk Viscosity	: < 8000 cps
Diluent	: Clean potable Water TDS < 1000 ppm
pH @ 25°C	: 7.5 - 8.5

COVERAGE

20-22 ft² per litre for ElastoSil in 2 coats (Coverage may vary depending upon surface)

KEY FEATURES

- › High Elongation up to 250% depending on grey cement addition quantity
- › Elastomeric Waterproofing Membrane has excellent bonding to cement, metal and stone surfaces

PACKING

4L & 20L





High Performance Acrylic Based Waterproofing Elastomeric Membrane

Elastobar is a high performance elastomeric membrane for crack bridging. It features curing through crosslinking and is highly UV durable. It features ability to elongate up to 175 percent. It can be used on variety of substrates as a mortar mix with sand and cement.

SPECIFICATIONS

Form	: Milky White, Free flowing Liquid
Viscosity @ 25°C	: < 500 cps
Specific Gravity	: 1.35 ± 1%
Flash Point	: Non Flammable
Elongation	: Up to 250%
Solid Content	: 50 ± 1%
pH @ 25°C	: 7.5 to 8.5
Dilutant	: Clean Potable Water TDS < 1000 ppm

COVERAGE

Membrane coating with cement : 18-20 Sq.ft. per 2 coats

KEY FEATURES

- › High Elongation Elastomeric Waterproofing Membrane
- › Crosslinking & UV Durable
- › 175% Elongation
- › Can be Used as a Mortar Mix with Sand and Cement
- › 7 Years Service Life



PACKING

1Kg, 5Kg & 20Kg





Acrylic Sealant with Low Shrinkage & Excellent Elongation

Seal-It is a ready to use acrylic crack filling compound for both interior and exterior surfaces. It can fill the cracks of up to 5 mm width as deep as possible.

SPECIFICATIONS

APPEARANCE	: White viscous, ready to use paste
Specific Gravity	: 1.06 to 1.07
Drying Time	: Touch dry : 4-6 hours Complete drying : 7 days
Solid Content	: 83 ± 1%

COVERAGE

40 to 50 running feet for a 5 mm crack

KEY FEATURES

- › Extremely Strong Adhesion on Cementitious Surfaces
- › Easy to Apply
- › Highly Water Resistant
- › Withstand 6% Crack Movement

PACKING

600gms, 1.2Kg





Zydex[®]

**ULTRA DURABLE
MINERAL PAINTS**

ADMIXTURE
SOLUTIONS



Integral Waterproofing Liquid & Water Reducing Admixture for Concrete and Mortar

Zycrete 2X is a next generation liquid admixture used for cement-based applications, concrete and mortar structures. It reduces permeability of concrete/mortar thus imparting prolonged waterproofing and durability. Zycrete 2X can be used with all types of cement/sand and is ideal for critical applications like roof slabs and screeds, basements, external plastering, bathroom floors, water tanks, sumps, drains, etc.

PROPERTIES

Chloride content: As per IS: 2645-2003

Permeability: It reduces the permeability of water into concrete or mortar and increases the durability

Compatibility: Can be used with all types of cement including pozzolanic but not High Alumina Cement.

Setting Time: Can Maximize Initial setting time by 2 hours

Comprehensive Strength: Comprehensive Strength of the Concrete remains within the specification limits

Shrinkage: Reduces shrinkage / crack development in plaster and concrete due to reduced water requirement.

KEY FEATURES

- › Improves Workability
- › Enhances Concrete Quality
- › Minimises Porosity and Honeycombing
- › Increases Setting Time
- › Higher Strength

PACKING

500ml, 1L, 5L, 10L, 20L & 210L



Densiflex-P is next generation liquid cement admixture for plaster and mortar applications that provides higher bond strength and flexibility with less water.

SPECIFICATIONS

Appearance	: Creamish to Light brown light
Solid content	: 33 - 35%
Water Solubility	: Easily Dispersible
pH	: 6.0 - 8.0

PROPERTIES

Permeability: Reduces the permeability of plaster/mortar and increases the durability

Compatibility: Can be used with all types of portland cement including pozzolanic but not with high alumina cement.

Setting Time: Can maximize initial setting time

Comprehensive Strength: Comprehensive Strength of the plaster/mortar is improved significantly.

Shrinkage: Reduces shrinkage / crack development in cementitious plaster and mortar

KEY FEATURES

- › Higher strength
- › Improved densification
- › Enhances flexibility
- › Minimizes cracking
- › Enhances overall mix design quality
- › Compliant to IS:2645-2003

PACKING

210L, 20L & 5L





Zydex[®]

**ULTRA DURABLE
MINERAL PAINTS**



Zydex[®]

**ULTRA DURABLE
MINERAL PAINTS**

MEMBRANE SOLUTIONS



Waterproofing Membranes

Underground membrane installations are much more durable than conventional waterproofing systems. These membranes are capable of withstanding very high water pressure.

The installation of membranes makes building construction more efficient and cost-effective, while also enhancing the quality and durability of structures.

Zydex offers a wide variety of advanced **Membrane Solutions**:



ANCHOR GRIP:

A new-age solution for basement waterproofing.



DIMPLE SHEET:

Ideal waterproofing for basement retaining walls.



HDPE MEMBRANES:

Reliable solution for basement waterproofing




TPO MEMBRANES:

Excellent waterproofing for rooftops and terrace gardens.



SBS MEMBRANES:

Provides a durable and flexible barrier for waterproofing roofs, foundations, and walls; applied using a flame torch.



Zydex®

ULTRA DURABLE
MINERAL PAINTS

PUTTY SOLUTIONS



Cement Based Putty

Xtend Wall Cem is white cement based Universal Waterproof Putty . Its ready to use property makes it suitable for both interior and exterior surfaces. The advanced formulation of the product protects the walls from dampness and provides a smooth finish along with higher coverage.

TECHNICAL DATA

Appearance	: White fine powder
Color	: White
Application	: By putty knife/steel trowel
Water demand	: 40-50% per coat
Drying Time	: Touch Dry: 45-60 Min, Re-coat: 6-8 Hrs
Thickness	: 0.5-1.0 mm per coat
Covering	: 450-500 sq ft/40 kg per bag, 1.5mm thickness with two coat
Pot life of wet material	: 30-45 min
Water Permeability	: Excellent
Recommended Area	: Cement plaster, gypsum plaster, Concrete surface, Interior wall

DIRECTION OF USE

Clean the surface thoroughly. Mix **“Xtend WallCem”** Wall Putty with 30-35% water to make a homogenous paste. For best performance add 2 percent ZycoPrime on weight of the dry product in the water used for paste making. Allow the mixture to stay (mature) for 2-3 minutes. Wet the surface with water and apply first coat of **“Xtend WallCem”** using putty knife/trowel. Allow it to dry for minimum 4 hours. Wet the surface again and apply a second coat.

SPECIFICATIONS

PACKING: 40 kg.

SHELF LIFE: 12 months in seal packed bag

COVERAGE: 14-16 square feet for 2 coats
(2mm Thickness)



Zydex®

ULTRA DURABLE
MINERAL PAINTS

Zydex Industries Private Limited

HEAD OFFICE: Zydex House-61, Gotri-Sevasi, Vadodara, Gujarat - 390021

Tel.: +91 265 3312000 | **E-mail:** info@zydexgroup.com

CORPORATE OFFICE: 1710, 17th Floor Magnum Global Park, Golf Course Ext Road, Sector 58, Gurugram, Haryana - 122011.

E-mail: Paints@zydexgroup.com | **Web:** www.zydexpaints.com

CERTIFIED COMPANY

ISO 9001:2015 • ISO 14001:2015