




HTAC拥有本资料所有的知识产权，未经HTAC的书面许可，本文件及相关资料禁止全部或部分复制、转让、透露或另作他用  
This document contains information proprietary to HTAC  
This document and such information is not to be reproduced, transmitted, disclosed or used otherwise in whole or in part without the written authorization of HTAC

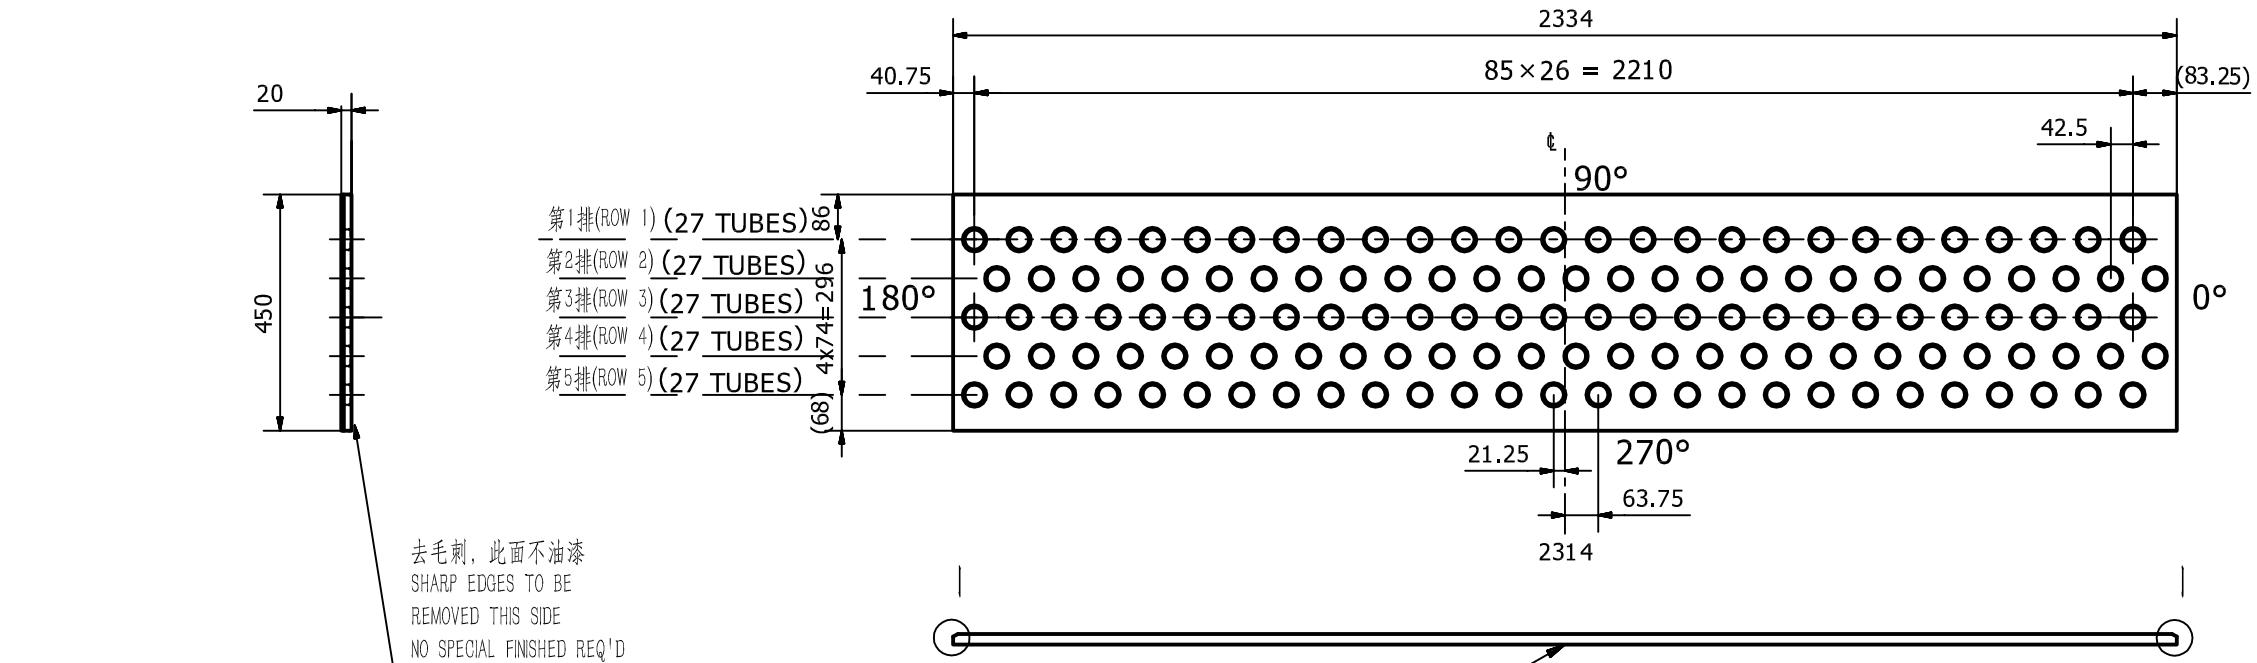



翅片管口详图  
TUBE HOLE DETAIL

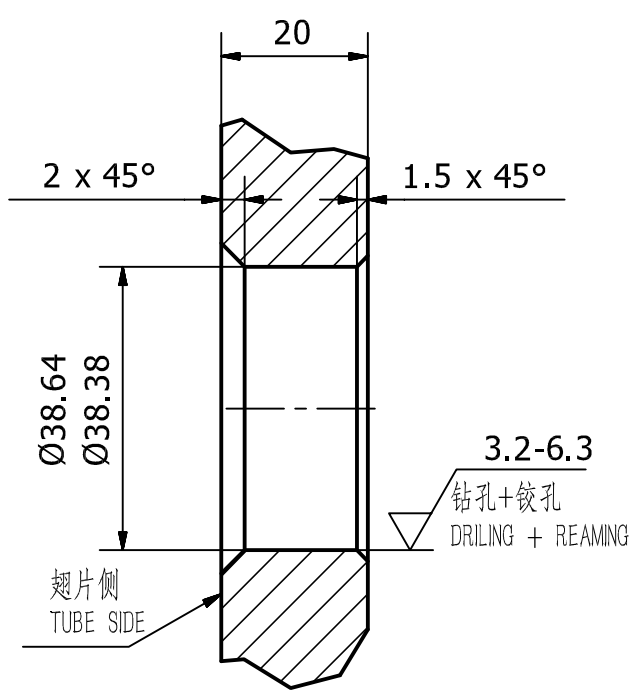

详图  
DETAIL I

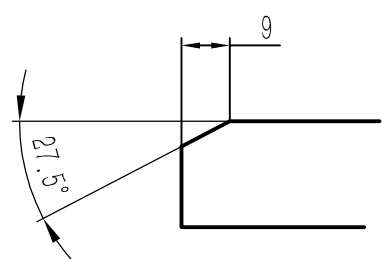

技术要求:  
1. 去毛刺, 最小半径为2mm。  
2. 油漆标准: C7046-PAI(TEP-1185508-P04-0001)。  
NOTE:  
1. REMOVE SHARP EDGES MINIMUM RADIUS = 2mm.  
2. THE PAINT IN ACCORDANCE WITH C7046-PAI(TEP-1185508-P04-0001).

出图部门 Drawn				材 料 Material		SA-516 Gr.70		质量 Mass kg		165	
4						顺流管束下管板 PLATE					
3											
2											
1						Mk.B-C7046-1400-HDD-001-02					
0											
修订号 Rev.	设计 Designed	日期 Date	工艺会签 Process checked	日期 Date	审核 Reviewed	日期 Date	批准 Approved	日期 Date			
 <b>HTAC 杭州汽轮辅机有限公司</b> HANGZHOU STEAM TURBINE AUXILIARY EQUIPMENT CO.,LTD										比例 Scale 1:10 第 1 页 共 1 页 Page 1 of 1	