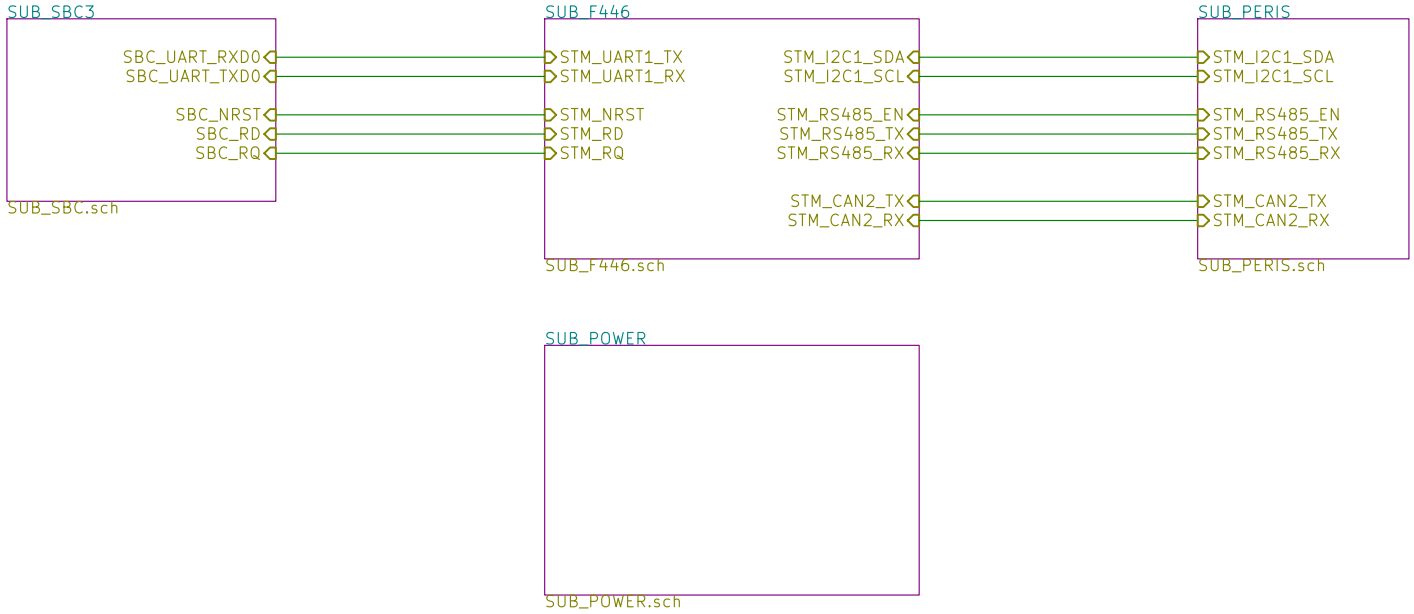

Sheet: / File: main.sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. kicad 4.0.2+dfsg1-stable		Id: 1/5

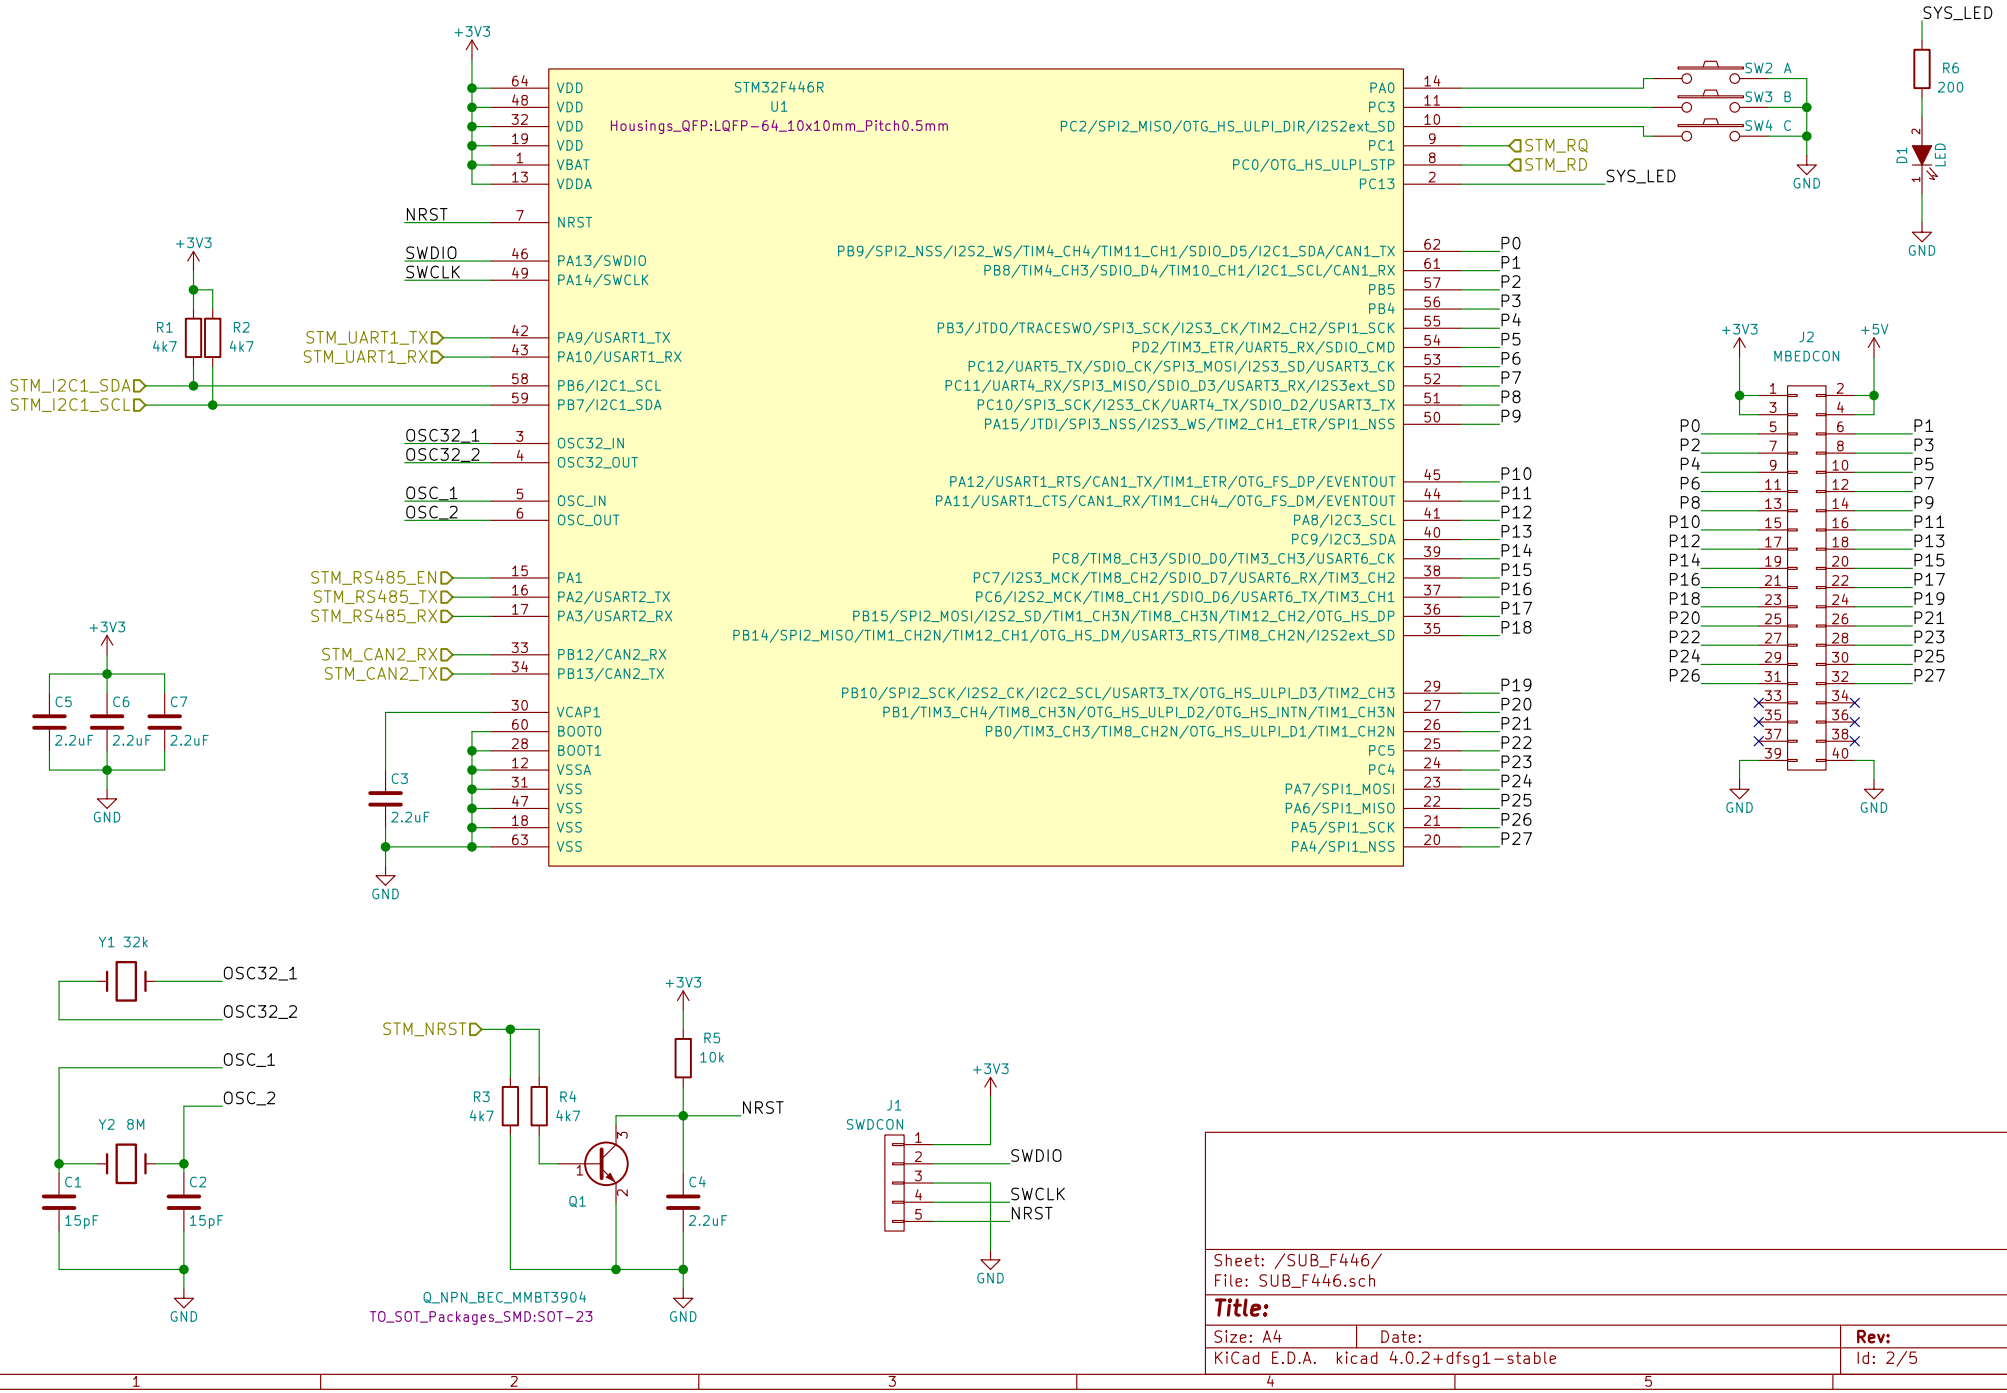

Sheet: /SUB_F446/
File: SUB_F446.sch

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. kicad 4.0.2+dfsg1-stable		Id: 2/5

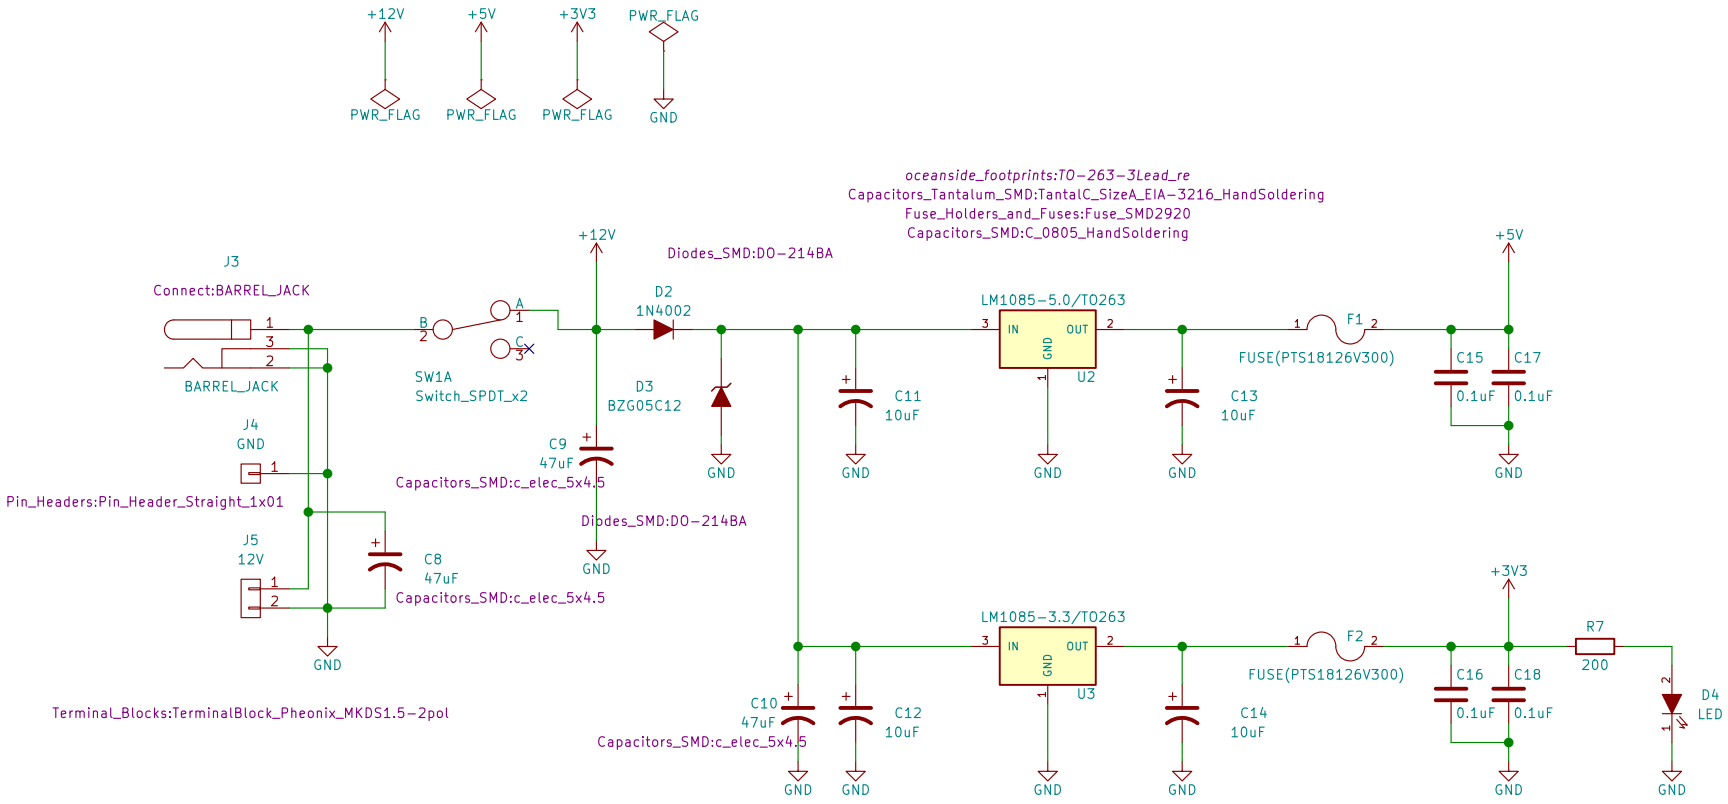

Sheet: /SUB_POWER/		
File: SUB_POWER.sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. kicad 4.0.2+dfsg1-stable		Id: 3/5

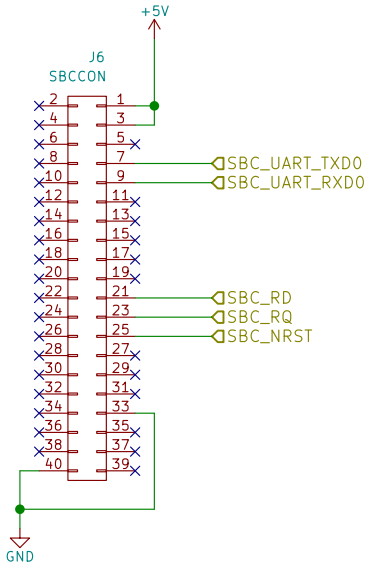

Be careful !!
To stack RPI and this board, the pins are opposite.
(Origianlly pin 2, 4 are 5V.)

This is because we will use an additional PCB
or flip RPI on our board.

Sheet: /SUB_SBC3/ File: SUB_SBC.sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. kicad 4.0.2+dfsg1-stable		Id: 4/5

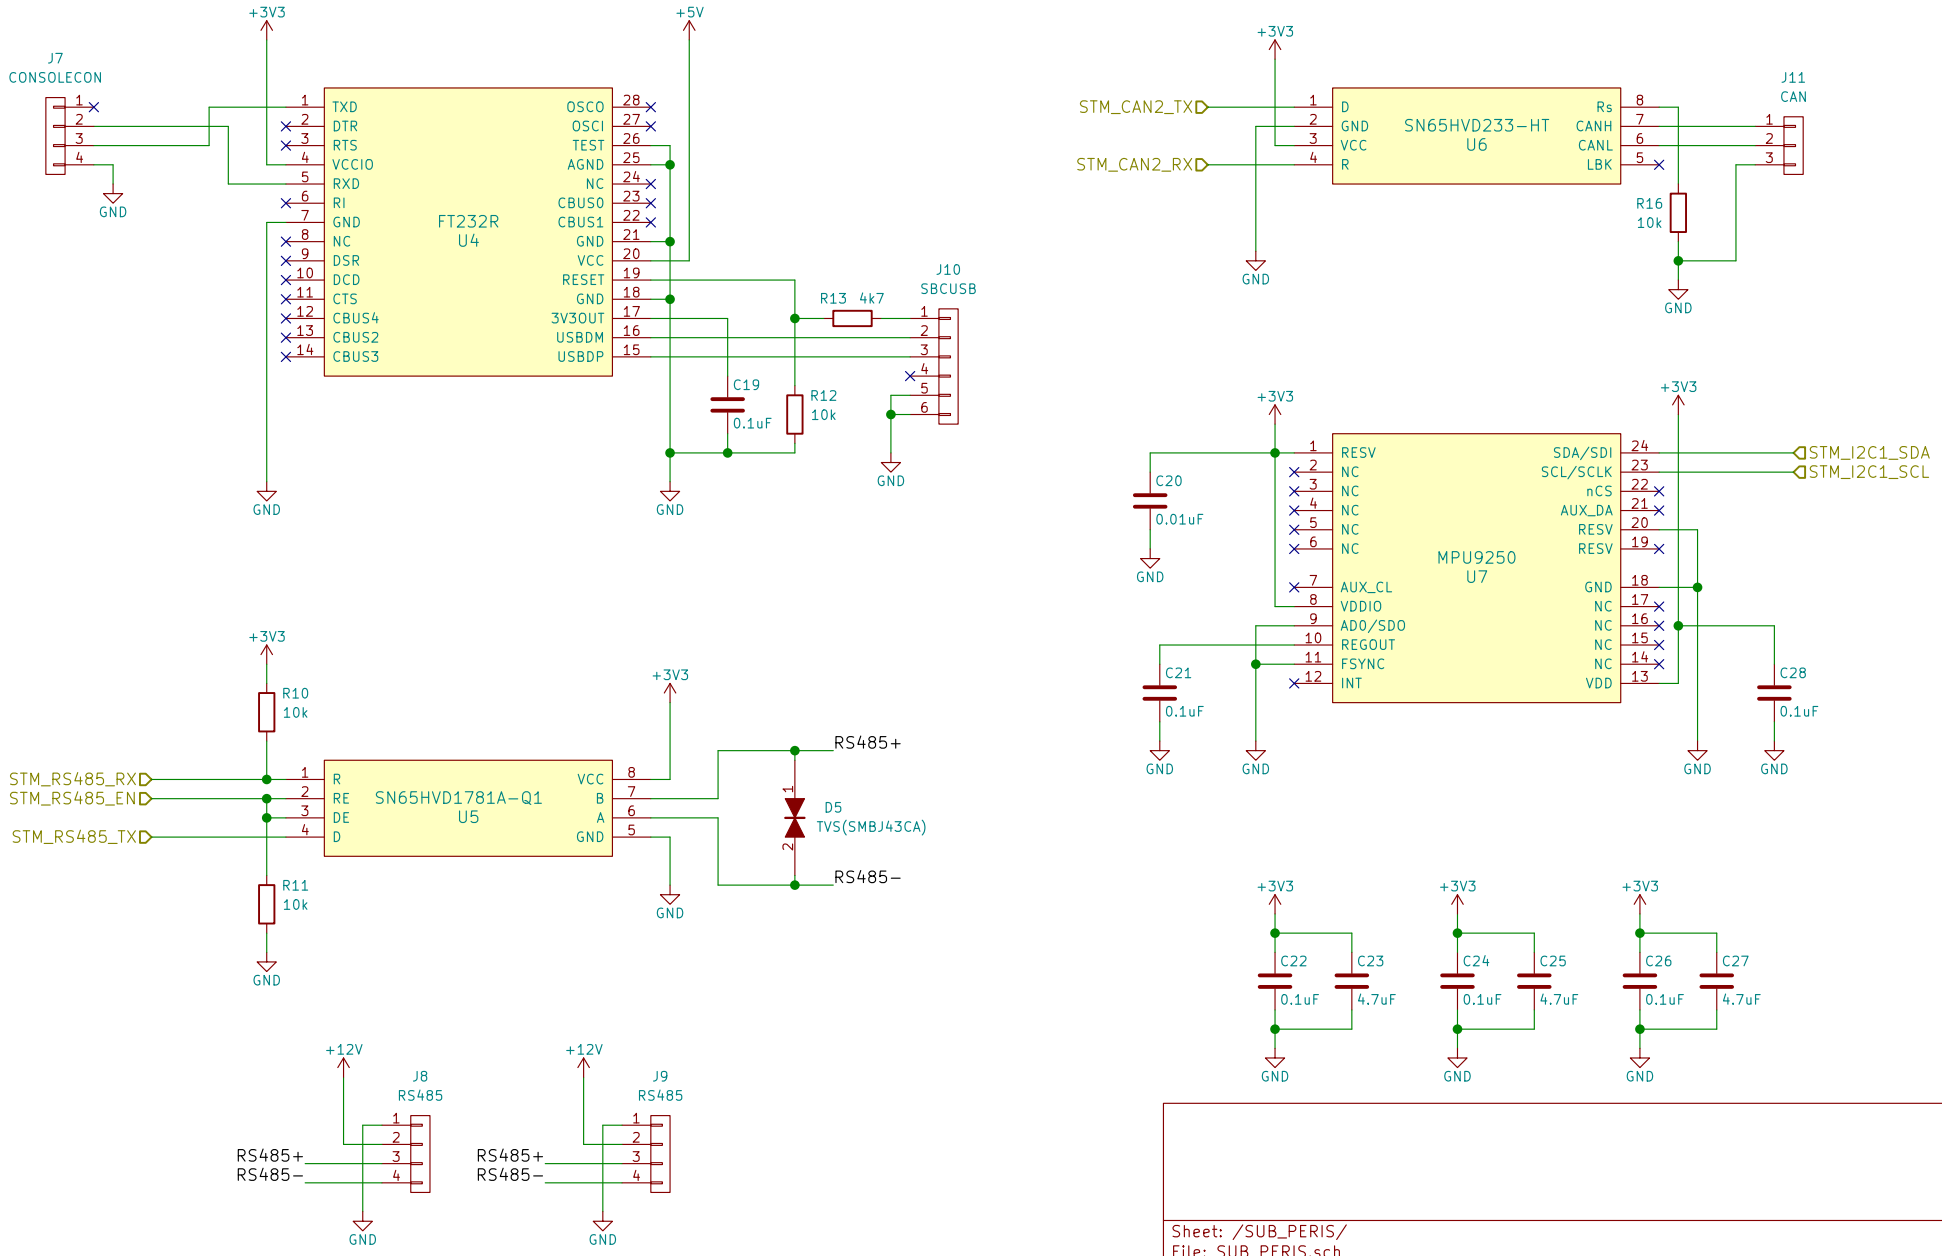

Use Molex 22-03-5045 for the RS485 cons.

Sheet: /SUB_PERIS/
File: SUB_PERIS.sch

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. kicad 4.0.2+dfsg1-stable		Id: 5/5