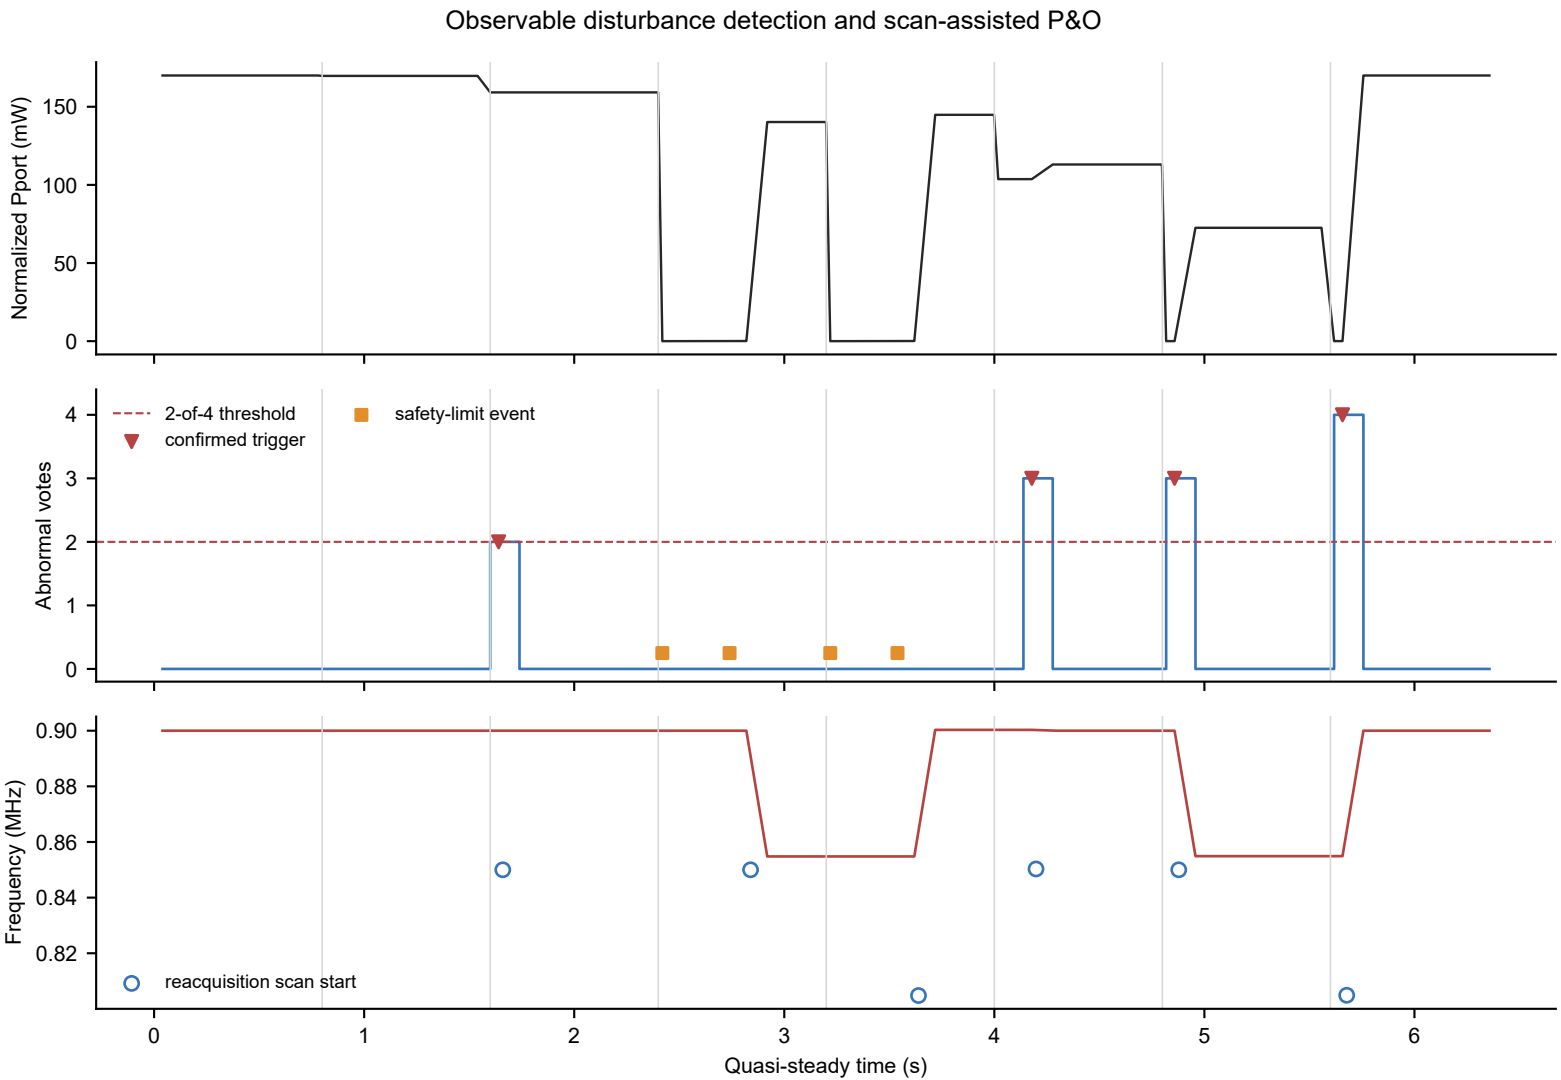
Observable disturbance detection and scan-assisted P&O
Normalized Pport (mW)
150
100
50
0
Abnormal votes
2-of-4 threshold
confirmed trigger
safety-limit event
4
3
2
1
0
Frequency (MHz)
0.90
0.88
0.86
0.84
0.82
reacquisition scan start
0
1
2
3
4
5
6
Quasi-steady time (s)