

Tower Inspection Report

Field	Details
Report ID	TIR-2025-003
FCC ASR Number	A1345977
Owner	AT&T Mobility Services LLC
Location	454 West Baseline Road, Claremont, CA
Coordinates	Lat 34.120694, Lon -117.721944
Tower Type	Monopole
Overall Height (AGL)	17.6 m
Structure Height	17.6 m
Registration Status	Active, Construction Permit Issued
Registration Date	09/30/2025
FAA Study Number	2014-AWP-9201-OE
Inspection Date	2025-01-28
Inspector	D. Thompson

Structural Assessment

Guyed tower structure shows signs of wear at multiple guy wire anchor points. Two anchor points require re-tensioning. Turnbuckle at Anchor Point 3 (northeast) exhibits early-stage corrosion. Overall tower plumbness within tolerance.

Visual Inspection of Guy Wire Anchors



Visual Inspection â€” Tower Mid-Section



Visual Inspection â€” Obstruction Lighting



Corrective Actions Required:

- Replace turnbuckle at Anchor Point 3 â€” corrosion exceeds acceptable limits

- Re-tension guy wires to specification (1,800 kgf)
- Repaint horizontal braces between 60-80m levels - paint flaking and surface corrosion observed
- Replace mid-level obstruction light (non-functional) - FAA compliance requirement

Grounding & Lightning Protection

Grounding resistance: 3.5 Ω (within spec). Lightning arrestor operational.


Summary

Tower requires corrective maintenance: guy wire re-tensioning, corrosion treatment, and obstruction light repair. Accelerated inspection cycle recommended. Priority: HIGH. Next scheduled inspection: 2025-04-28.

Data Source: [FCC Antenna Structure Registration \(ASR\) Database](#) - U.S. Federal Communications Commission. Tower registration data is public record.


Technical Documentation

Antenna Radiation Pattern

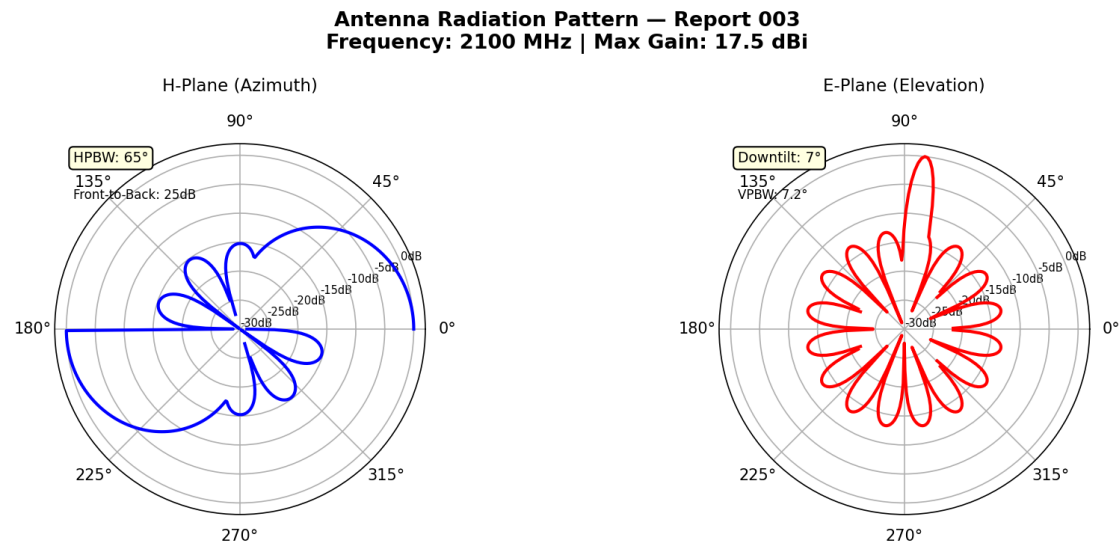


Radiation pattern at 2100 MHz (UMTS/LTE Band 4). Higher frequency yields tighter beam pattern. Front-to-back ratio: 25 dB. Side lobe suppression: -15 dB below main lobe.

Tower Elevation Drawing

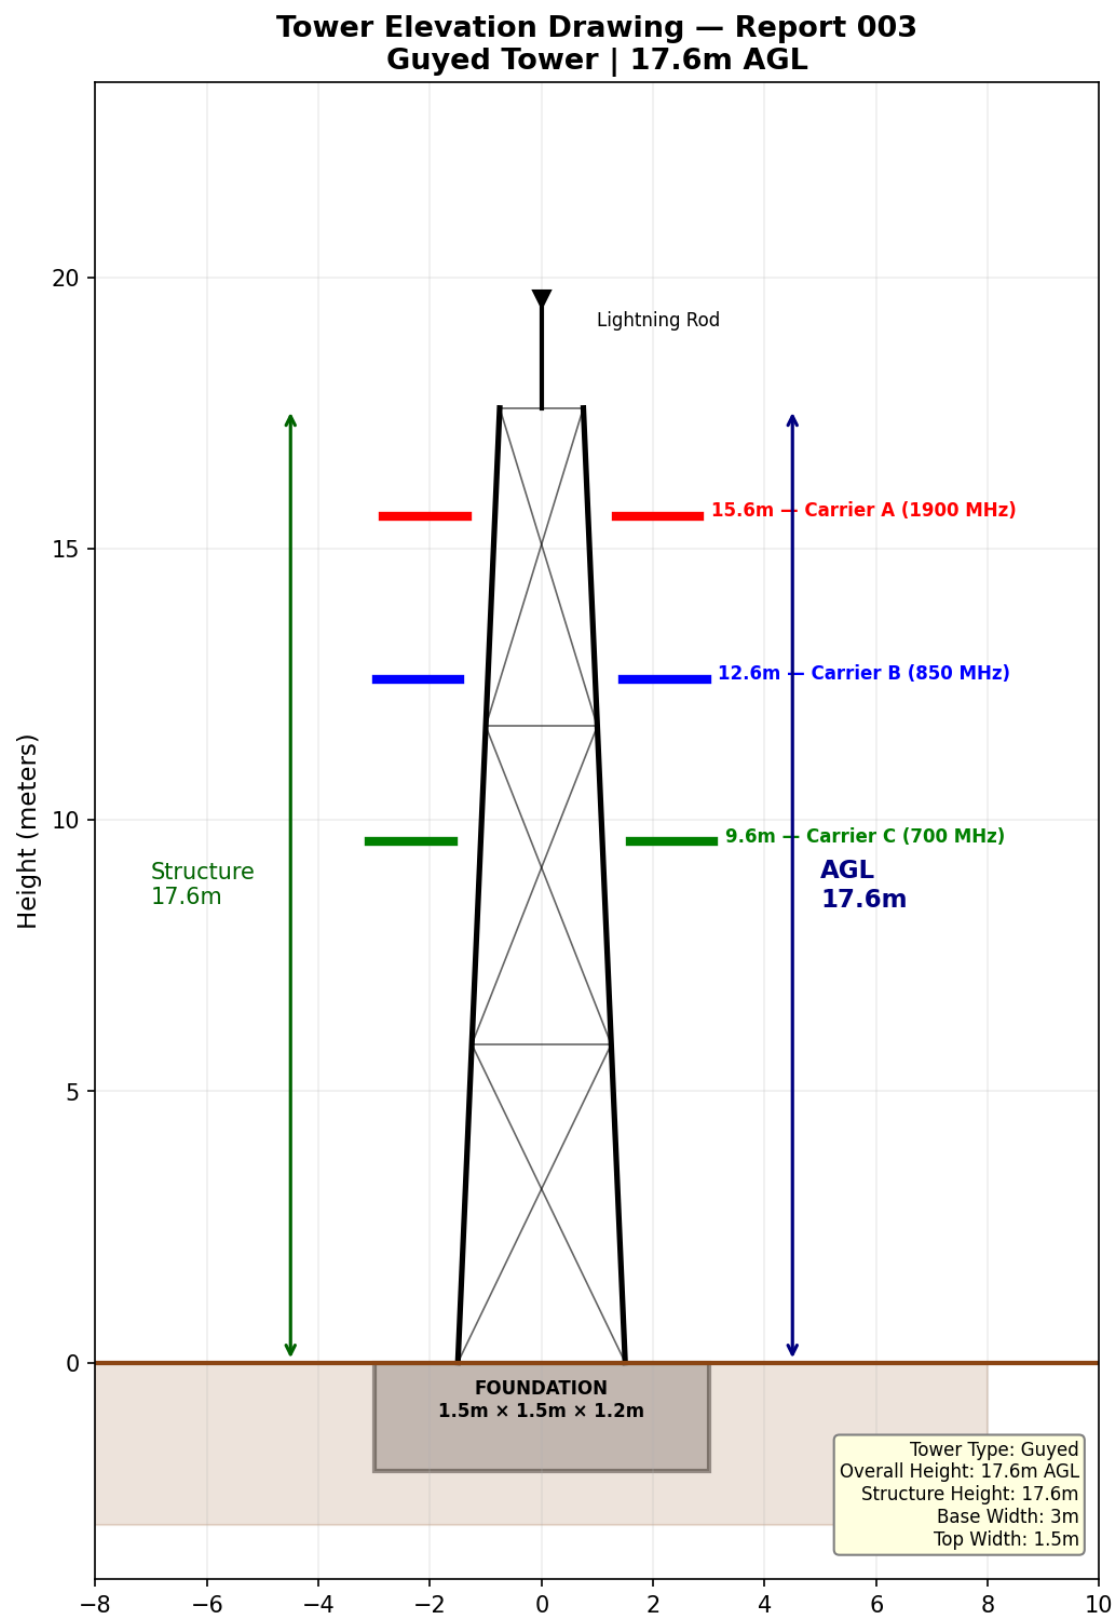


Guyed tower elevation ~ 17.6m AGL height. Compact structure with antenna positions at 15.6m, 12.6m, and 9.6m. Guy wire attachment points at 12m and 6m levels.

RF Exposure Compliance

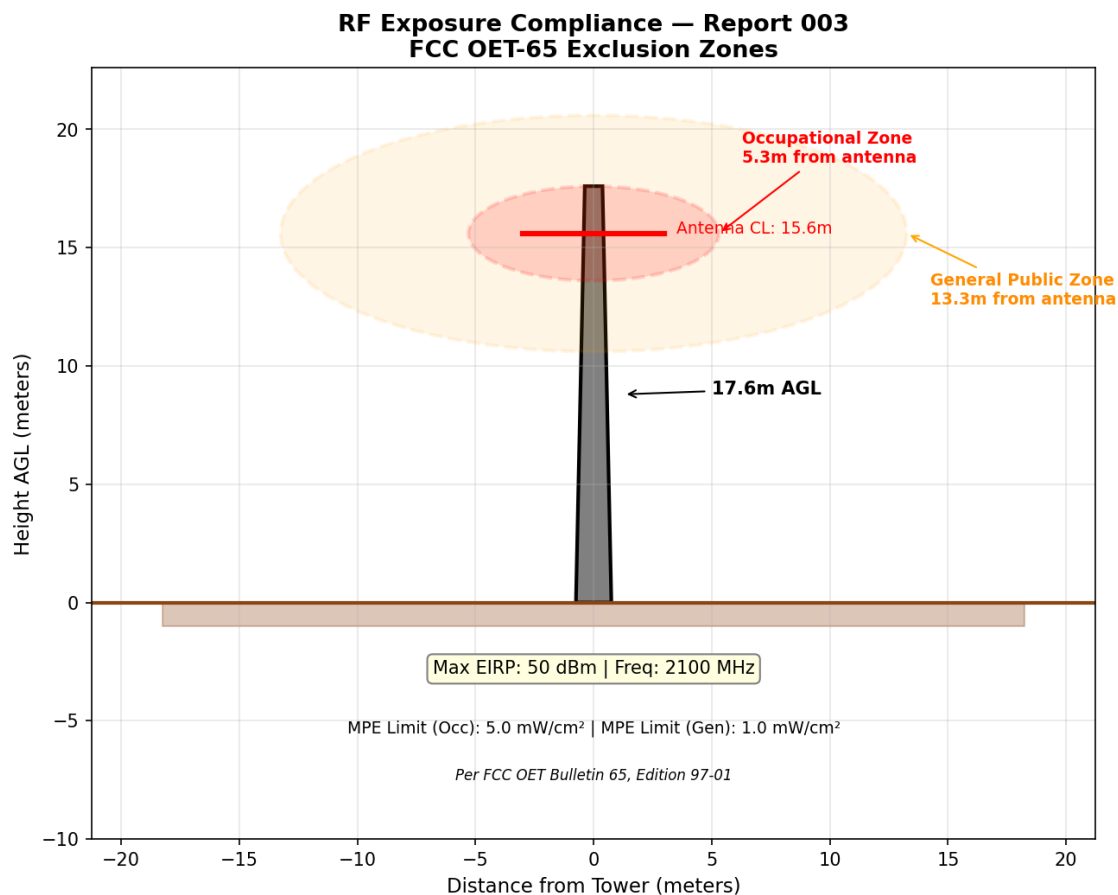

RF compliance diagram for 2100 MHz. Shorter tower height brings exclusion zones closer to ground level.
Occupational zone: 5.3m from antenna. General public zone: 13.3m.

Predicted Coverage Map

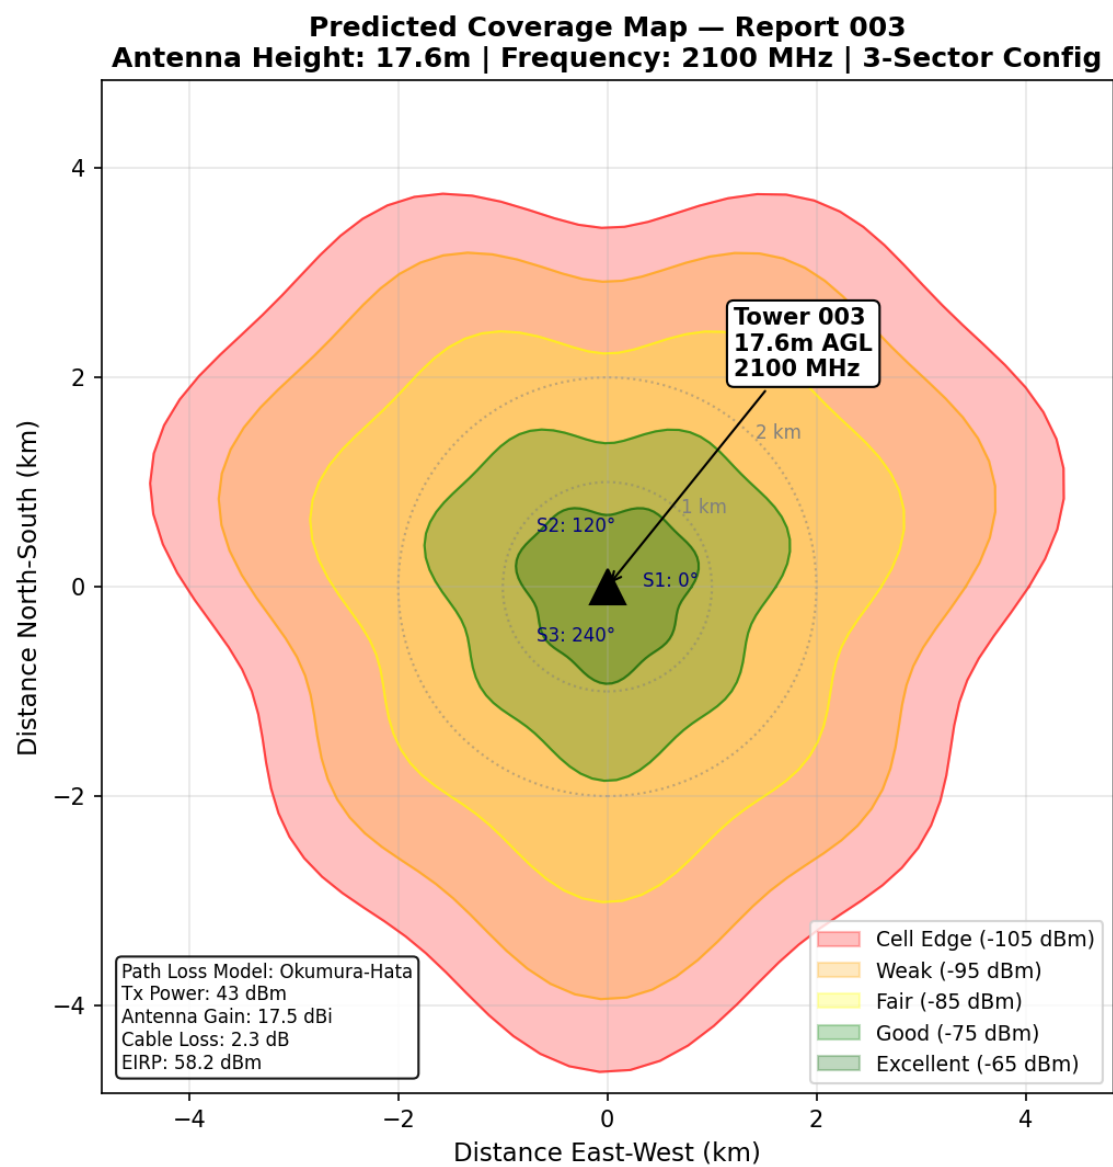

Coverage at 2100 MHz is reduced range compared to lower bands. Short tower height limits coverage radius. Suitable for capacity infill in rural areas.