

Product Data Sheet





SMD 2835

120 LEDs

HB-ST2Q120V12-Cxx-10MM-L610-SHE

Constant Voltage IP68 LED Strip

Solid dome co-extrusion

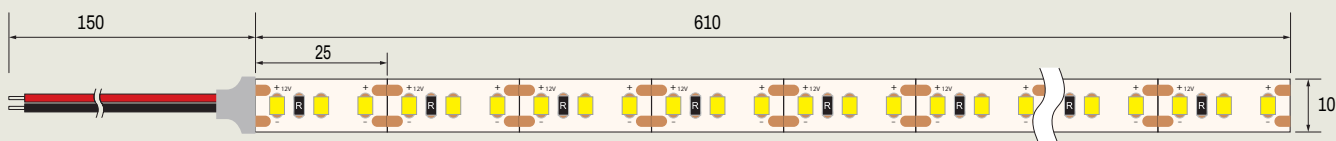

DESCRIPTION

This LED strip features a fully encapsulated IP68 silicone coating, providing superior protection against dust, moisture, and continuous water immersion.


The flexible silicone body maintains excellent light transmission, ensuring consistent performance in outdoor and high-humidity installations.

SPECIFICATIONS


PARAMETER	VALUE
INPUT VOLTAGE	DC12V
Ra	>90%
Lm/W @ 4000K	84.9
Beam Angle	120°
LED Chips / m	120 pcs
Working Temp.	-25°C ~ 45°C
Cuttable Length	25 mm
PCB Width	10 mm

CCT (K)	Power (W/m)	Lumen (Lm/m)	Max. run length (m)
2700	24	1920	5
3000	24	1944	5
4000	24	2037	5
6500	24	1968	5

Light Distribution Curve

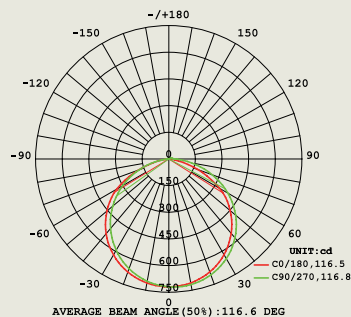

Effective Average Illuminance



FEATURES

- LED Type: 2835
- Color Consistency: SDCM ≤ 3
- Ingress Protection: IP20
Optional: IP54 / IP65 / IP67 / IP68



WARNING

LED strips are low-voltage devices and require a proper power supply. Do not connect the LED strip directly to AC110V, as this will damage the LEDs and cause the strip to burn out.

Clean up the installation surface, it will ensure the reliability of the adhesive. The electrical connection process must be operated by a professional person.